

FOX-LT

Automotive Vehicle Location solution (AVL)

High Sensivity Satellite Navigation (50 channel u-blox 5 engine)

A-GPS capable

Communication via Quad Band GSM

SMS, Data, GPRS, TCP/IP, E-mail

User configurable

Autonomous operation

Thief Alert / Motion Detection

Online Tracking

Fleetmanagement

Car Security and Recovery

Drivers Logbook/History

Territory Management / Geofencing

Remote administration & firmware update

Fully approved (CE, e1, FCC, PTCRB)

Options: Backup Battery
microSD Card interface
CAN interface
Audio interface



The FALCOM FOX-LT

is a free configurable smart tracking device which can be fully adapted to user requirements. Its main purpose is to act as a mobile client for various system solutions like AVL, fleet management, vehicle security and recovery. The device can operate fully autonomous and is able to interact using sensors and actors.

It can be adapted to existing tracking solutions and can be easily configured to gather or exchange relevant information with servers or users directly. An often used example is to send status reports or verbose alert messages directly via SMS to users and/or via TCP to tracking servers.


Users benefit most from combining comfort and security aspects – for example having regular voice calls as well as spy calls in emergency cases. Drivers logbook and data logging functionalities are combined in the history feature.

Geofencing can be used to report violations of predefined routes or areas (for example if a car enters or leaves a specific area/no-go-zones).

All of these features are perfectly integrated in a device concept which significantly reduces time-to-market and provides low cost tracking and security solutions.

Software features

- PFAL commands for full control
- Intelligent and flexible alarm system, suitable for most applications
- Customizable device messages
- Easy to combine with most digital and analogue sensors
- Drivers Logbook / History
- Geofence, distance calculation
- Trip management
- Local and remote communication
- Optional
 - Encrypted communication
 - Security authentication
- Remote access
 - Status reports / tracking
 - Commands
 - Configuration
 - Firmware update

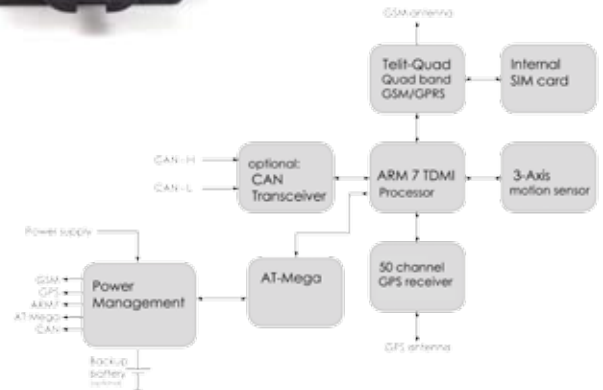

Applications

- Real time online tracking
- Fleet management / monitoring
- Security / emergency services
- Real time satellite navigation
- Territory management
- Personalized drivers logbook
- Route verification
- Trip management / distance calculations
- Theft protection
- Toll collection / pay as you drive
- Compatible with FALCOM Trace4you Server solution

trace4you



Technical specification

GSM core	Temperature range**
TELIT GE864-Quad module	Storage: -40 °C to +90 °C
850/900/1800/1900 MHz	Operating: -40 °C to +85 °C
GPRS class 10, class B	GSM: -30 °C to +80 °C
TCP/IP (accessible via PFAL commands)	Battery option: -20 °C to +60 °C
	Charging: 0 °C to +45 °C
GPS core	Discharging: -20 ° to +60 °C
FALCOM 50 channel GPS receiver	
A-GPS online/offline support	
u-blox 5 engine	Motion sensor
Protocols: NMEA, GGA, GGL, GSA, GSV, RMC, WGS-84	3 axis motion sensor
Position accuracy: < 10 m CEP without SA	Interfaces
TTF hot start: < 1 s average	4 IOs
TTF cold start: < 42 s average	• 3 configurable inputs digital outputs
Tracking sensitivity: -159 dBm (13 dBHz)	(2 are used for CAN feature)
	• 1 digital input (IGN)
Processor core	RS232 (RX,TX V24 level)
ARM7/TDMI	SIM card reader for 1,8/3 V SIM cards
8 MB Flash / 2 MB RAM	Audio interface* (Speaker, Microphone)
	3 programmable LEDs
Electrical characteristics	SD card interface*
Power: +10,8 V to +35 V DC	
Backup battery*	Antennas
	external FAKRA-connector for GSM and GPS
Physical characteristics	
Dimensions (LxWxH): 85 x 60 x 24 mm	
Weight: approx. 220 g	

* optional available

** extreme temperatures can affect device performance.

Note: Specifications and information given in this document are subject to change by FALCOM without notice.
For latest product information see www.falcom.de