



**ELECTRONIC TECHNOLOGY SYSTEMS
DR. GENZ GMBH**

EMC TEST - REPORT

EN 301 489 – 1/ -7

Test report no.:

G0M20212-7419-E-16



TABLE OF CONTENTS

1	General Information	2
1.1	Notes	2
1.2	Tester	3
1.3	Testing laboratory	4
1.3.1	Location	4
1.3.2	Details of accreditation status	4
1.3.3	Test location, where different from ETS	4
1.4	Details of applicant	5
1.5	Application details	5
1.6	Test item	5
1.6.1	Description of test item	5
1.6.2	Manufacturer (if different from applicant in point 1.4)	6
1.7	Test standards	6
2	Technical test	7
2.1	Summary of test results	7
2.2	Test environment	7
2.3	Test equipment utilized	8
2.4	Testresults acc. EN 301 489 - 1	21
2.3.1	Carried out emission tests	22
2.3.2	Carried out immunity tests	27
2.3.3	Test protocols	39
3	Normative references	52

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Futhermore, there is no guarantee that a test sample which has Passed all the relevant tests conforms to a specification (only for telecommunication equipment).

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.6.

The test report may only be reproduced or published in full.

Reproduction or publication of extractes from the report requires the prior written approval of the ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH.



1.2 Tester

05.06.2003

Date

ETS-Lab.

Test Engineer

Signature

A handwritten signature in black ink, appearing to be 'J. Genz', written over a horizontal line.

Technical responsibility for area of testing:

05.06.2003

Date

ETS

Kaspar

Name

Signature

A handwritten signature in black ink, appearing to be 'A. Kaspar', written over a horizontal line.

Registrationnumber : G0M20212-7419-E-16



1.3 Testing laboratory

1.3.1 Location

ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH (ETS)
Storkower Strasse 38c
D- 15526 Reichenwalde
Germany
Telephone : + 49 33631 888 00
Telefax : + 49 33631 888 66

1.3.2 Details of accreditation status

ACCREDITED TESTING LABORATORY

DAR-REGISTRATION NUMBER: TTI-P-G 126/96

ACCREDITED COMPETENT BODY

DAR-REGISTRATION NUMBER: BPT-ZE-026/96

FCC filed test laboratory Reg. No. 96970

A2LA Accredited Certification No.1983-01

Bluetooth Qualification Test Facility (BQTF)

Accredited by Bluetooth Qualification Review Board

Industry Canada filed test laboratory Reg. No. IC 3470

1.3.3 Test location, where different from ETS

Name: /.
Street: /.
Town: /.
Country: /.
Telephone: /.
Fax: /.
Teletex: /.

Registrationnumber : G0M20212-7419-E-16

1.4 Details of applicant

Name : FALCOM GmbH
Street : Gewerbering 6 ,
Town : 98704 Langewiesen,
Country : Germany
Telephone : 03677 8042-0
Fax : 03677 8042-215
Teletex : /.

Contact : Herr Ralf Leipoldt
Telephone : 03677 8042-0

1.5 Application details

Date of receipt of application : 12.12.2002

Date of receipt of test item : 12.12.2002

Date of test : 12.12.2002

1.6 Test item

1.6.1 Description of test item

Description of test item : Embedded GSM-GPRS-GPS-Modul

Type identification : C2D-SI 900/1800

Serial number : without serial number

Hardware Version : 04

Software Version : 4.33

Frequency band : 900/1800

Additional information : ---



1.6.2 Manufacturer (if different from applicant in point 1.4)

Name: --
Street: --
Town: --
Country: --

1.7 Test standards

Technical standard :

EN 301 489-7 V1.2.1 : 2002
EN 301 489-1 V1.4.1: 2002
EN 50081-1 : 1992
EN 50082-1 : 1997

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations as specified in 2.4 were ascertained in the course of the tests performed.



2.2 Test environment

Temperature: 18 24 °C

Relative humidity content 20 % 75 %

Air pressure: 860 1060 hPa

Details of power supply: 220 240 V

Other parameters: $U_{nom} = 5,0V DC$

2.3 Test equipment utilized

No.	Test equipment	Type	Manufacturer
ETS 0001	Test receiver	ESHS 10	Rohde & Schwarz
ETS 0002	Test receiver	ESVP	Rohde & Schwarz
ETS 0003	Test receiver	ESVS 10	Rohde & Schwarz
ETS 0004	Spektrum- and Network-Analyzer	FSMS 26	Rohde & Schwarz
ETS 0005	Test receiver	SMV 11	MEB
ETS 0006	Test receiver system	SME 12	MEB
ETS 0008	Antenna	Loop antenna	Siemens
ETS 0009	Antenna	ARA 2	MEB
ETS 0010	Antenna	Loop antenna	MEB
ETS 0011	Antenna	van Veen/ Frame	Rohde & Schwarz
ETS 0012	Antenna	HK 116	Rohde & Schwarz
ETS 0013	Antenna	HL 223	Rohde & Schwarz
ETS 0014	Antenna	HL 025	Rohde & Schwarz
ETS 0015	Antenna	HL 025	Rohde & Schwarz
ETS 0016	Precision antenna kit	VHAP	Schwarzbeck
ETS 0017	Precision antenna kit	UHAP	Schwarzbeck
ETS 0020	Antenna	DP 21	MEB
ETS 0021	Antenna	DP 3	MEB
ETS 0022	Antenna	SAS-200/ 521	A.H. Systeme+D65
ETS 0023	Antenna	DP 1	MEB
ETS 0024	Antenna mast	AF 2	MEB
ETS 0025	Antenna mast	AF 2	MEB
ETS 0026	Tripod		Heinrich Deisel
ETS 0027	Tripod		Heinrich Deisel
ETS 0028	Tripod	STA 2	C. Lorenz AG
ETS 0029	Tripod		Berlebach
ETS 0031	Turn table	DS 412	Heinrich Deisel
ETS 0032	Controller	HD 050	Heinrich Deisel
ETS 0033	RF generator	SMG	Rohde & Schwarz
ETS 0034	RF generator/ Amplifier	SMLR	Rohde & Schwarz
ETS 0035	RF generator/ Amplifier	SMLM	Rohde & Schwarz

No.	Test equipment	Type	Manufacturer
ETS 0038	RF amplifier	150L	Amplifier Research
ETS 0039	Absorbing clamp	MDS 21	Rohde & Schwarz
ETS 0040	Artificial mains	ESH3-Z5	Rohde & Schwarz
ETS 0041	Artificial mains	ESH3-Z4	Rohde & Schwarz
ETS 0042	Artificial mains	ESH3-Z6	Rohde & Schwarz
ETS 0044	Artificial mains	NNB 111	MEB
ETS 0045	Stripe line	IEC 801-3	ETS
ETS 0046	Power supply	LTS 006	RFT
ETS 0047	Power supply	TG 20/ 1	Statron
ETS 0048	Power supply	TG 20/ 1	Statron
ETS 0049	Power supply	T 102	TPW
ETS 0050	Power supply	T 101b	TPW
ETS 0051	Oscilloscope	TDS 640A	Tektronix
ETS 0052	Audio analyzer	UPA 4	Rohde & Schwarz
ETS 0053	ECAT Controlcentre	CE 40	Keytek/ EMV
ETS 0054	EFT simulator	E 412	Keytek/ EMV
ETS 0055	Modul network coupler	E 4551	Keytek/ EMV
ETS 0056	Blank plug-in		Keytek/ EMV
ETS 0057	Module SURGE with DC coupler	E 501	Keytek/ EMV
ETS 0058	Capacitive coupling clamp	E 502 B	Keytek/ EMV
ETS 0059	Kikusui amplifier	PCR 2000L	Keytek/ EMV
ETS 0060	Xitron power analyzer		Keytek/ EMV
ETS 0061	Power/ Arb (Harm., Ramp)		Keytek/ EMV
ETS 0062	Reference impedance		Keytek/ EMV
ETS 0063	Blank plug-in		Keytek/ EMV
ETS 0064	CDN IEC 1000-4-6		Keytek/ EMV
ETS 0065	ESD-generator minizap		Keytek/ EMV
ETS 0066	EM Injection Clamp		FCC/ EMV
ETS 0067	Calibration Fixture	IEC 801-2031 CF	FCC/ EMV
ETS 0068	CDN IEC 1000-4-6	CDN	FCC/ EMV
ETS 0069	EM Radiation Monitor	EMR-20	Wandel & Goltermann
ETS 0070	PC Transfer set EMR-20	EMR-20	Wandel & Goltermann
ETS 0071	Videocamera system	KMB012	Kocom
ETS 0072	Interphone system	JS-1400	Jiuh Sheng

Registrationnummer : G0M20212-7419-E-16

No.	Test equipment	Type	Manufacturer
ETS 0073	Audio noise meter	GSM 2	MKD/ RFT
ETS 0074	RF millivoltmeter	QRV 2	MKD/ RFT
ETS 0075	NF generator	GF 22	Präcitronic
ETS 0076	Feeding bridge A	SBA 1000	ESP
ETS 0077	Audio/ Video Filter set	AV 55020	ETS
ETS 0078	LCR meter	SR 720	SRS
ETS 0079	Functional generator	MX-2020	Maxcom
ETS 0080	EMI Software	ES-K1	Rohde & Schwarz
ETS 0081	EMI Software	ES-K10	Rohde & Schwarz
ETS 0082	PC Novell network system	Novell	Esotronic
ETS 0083	Apple computer sstem	Performa 630	Macintosh
ETS 0084	Processcontroleer	PSA 15	Rohde & Schwarz
ETS 0085	Shielded room	SR 1	Frankonia
ETS 0086	Anechoic chamber	AC 1	Frankonia
ETS 0087	Climatic cell	HC 4033	Heraeus
ETS 0088	Colour TV pattern generator	PM 5518-TX VPS	Philips
ETS 0089	Radiocommunication tester	CMS 54	Rohde & Schwarz
ETS 0090	DECT type approval CTR06	TS 8930	Rohde & Schwarz
ETS 0091	RF signal generator	SME 03	Rohde & Schwarz
ETS 0092	DM-Coder	SME-B11	Rohde & Schwarz
ETS 0093	Pulse Modulator	SM-B8	Rohde & Schwarz
ETS 0095	DECT system controller	PSMD	Rohde & Schwarz
ETS 0096	DECT Signalling unit	PSMD-B11	Rohde & Schwarz
ETS 0097	Rack, 19", 36 HU	TS 89RA	Rohde & Schwarz
ETS 0098	System engineering and software	CS 893BE	Rohde & Schwarz
ETS 0099	Extension unit for basic version	TS 8930B	Rohde & Schwarz
ETS 0100	RF signal generator	SME-06	Rohde & Schwarz
ETS 0101	DM-Coder	SME-B11	Rohde & Schwarz
ETS 0102	Pulse modulator	SM-B8	Rohde & Schwarz
ETS 0103	Pulse generator	SM-B4	Rohde & Schwarz
ETS 0105	High power synthesizer/ sweeper	SMP 22 / 02	Rohde & Schwarz
ETS 0106	Frequency extension	SMP-B11	Rohde & Schwarz
ETS 0107	RF attenuator for SMP 22	SMP-B15	Rohde & Schwarz
ETS 0108	DECT protocol tester TBR 22	TS 1220	Rohde & Schwarz

Registrationnumber : G0M20212-7419-E-16

No.	Test equipment	Type	Manufacturer
ETS 0109	Process controller	PSM 2	Rohde & Schwarz
ETS 0110	Real time signalling unit	PSMD-B2	Rohde & Schwarz
ETS 0111	PCM Realtime audio interface for PSM	PSMD-B3	Rohde & Schwarz
ETS 0112	Synthesizer Module	PSMD-B4	Rohde & Schwarz
ETS 0113	Keyboard	PSA-Z2	Rohde & Schwarz
ETS 0114	RF step attenuator	RSG	Rohde & Schwarz
ETS 0115	Glide path		Rohde & Schwarz
ETS 0116	RF Millivoltmeter	URV 55	Rohde & Schwarz
ETS 0117	Insertion unit	URV-Z2	Rohde & Schwarz
ETS 0118	Mixer	MFC 1000	Avcom
ETS 0119	Mixer	MFC 2000	Avcom
ETS 0120	RF step attenuator	TRI-50-20	INCO
ETS 0121	Oscilloscope	EO 147A	Serute
ETS 0122	Oscilloscope	5201	Dagatron
ETS 0123	RF step attenuator	RBU	Rohde & Schwarz
ETS 0124	Tripod	STA 2	Rohde & Schwarz
ETS 0126	Uninterruptable power supply	UPS - 1500	Sendon
ETS 0127	Uninterruptable power supply	UPS - 1000 LC	Sendon
ETS 0128	Uninterruptable power supply	UPS - 1000	Sendon
ETS 0129	Uninterruptable power supply	UPS - 500	Sendon
ETS 0130	Uninterruptable power supply	Power saver	Sendon
ETS 0131	Telephone connection box		Systel
ETS 0132	Frequency doubler	TR-0616	EMG
ETS 0133	Probe body	P6015	Tektronix
ETS 0134	Mains filter	MSF	Erika Fiedler
ETS 0135	Measureing switching point	AK 11	RFT
ETS 0136	Attenuator	33-6-34	Weinschel
ETS 0137	Multimeter	YX-360TRA	Mastech
ETS 0138	Multimeter	DT-9410	Diditec
ETS 0139	Multimeter	ST-9202	Standard
ETS 0140	High voltage generator	IP 6Wa	TPW
ETS 0141	Sliding bridge	J 573	RFT
ETS 0142	Impedanz converter	TK 11	RFT

Registrationnumber : G0M20212-7419-E-16

No.	Test equipment	Type	Manufacturer
ETS 0143	Impedanz converter	TK 12	RFT
ETS 0146	Aktive RF probe	ESH2-Z2	Rohde & Schwarz
ETS 0147	Probe	TK 103	MEB
ETS 0148	Test TV	21PT4301/00	Philips
ETS 0149	Power divider	ZAPD-21	MCL
ETS 0150	Switcher	HR07-720	Wisi
ETS 0151	Interference pulse generator	NSG 500C	Schaffner
ETS 0152	Simulator for Load-Dump-Impulse	NSG 506C (I)	Schaffner
ETS 0153	Simulator for Load-Dump-Impulse	NSG 506C (II)	Schaffner
ETS 0154	Signalgenerator	SMG	Rohde & Schwarz
ETS 0155	Signalgenerator	SMG	Rohde & Schwarz
ETS 0156	Adjacent channel power meter	NKS	Rohde & Schwarz
ETS 0157	TV and Sat-Signalgenerator	VTG 700	Grundig
ETS 0158	TV and Sat Signalgenerator	VTG 700	Grundig
ETS 0159	Programmable power supply	TOE 8815	Toellner
ETS 0160	Protective wire and isolation tester	PI 6001 D	SPS electronic
ETS 0161	Filter system / consumer electronic		Fiedler
ETS 0162	Acoustic chamber	403-A	IAC
ETS 0163	Test head	BK 4602	Brüel & Kjær
ETS 0164	Simulator ear	BK 4185	Brüel & Kjær
ETS 0165	Simulator mouth	BK 4227	Brüel & Kjær
ETS 0166	Acoustic calibrator	BK 4231	Brüel & Kjær
ETS 0167	Communication Analysis System	CAS TE I	HEAD acoustics
ETS 0168	Acoustical test for DECT	CTR 10	HEAD acoustics
ETS 0169	Measurement - Frontend (analog)	MFE III	HEAD acoustics
ETS 0170	Measurement - Frontend (digital)	MFE IV	HEAD acoustics
ETS 0171	Electronic test cradle	TEH	HEAD acoustics
ETS 0172	Noise generator	HNG III.1	HEAD acoustics
ETS 0173	Speaker	Canton S Pluss	HEAD acoustics
ETS 0174	Measurement - Frontend line interface	MFE V	HEAD acoustics
ETS 0175	Software Line interface (analog)	COPTZV5	HEAD acoustics
ETS 0176	Acoustic volt meter	COP 4	HEAD acoustics
ETS 0177	Feeding bridge B	SBB 1000	ESP

Registrationnumber : G0M20212-7419-E-16

No.	Test equipment	Type	Manufacturer
ETS 0178	Open area test side	10m	ETS
ETS 0180	Artificial mains	NNB01/RFZ	RFZ
ETS 0181	Test pin for protective wire	PE 156-i	SPS electronic
ETS 0182	Power supply	MX-9300	Maxcom
ETS 0183	Frequency counter	MX-9300	Maxcom
ETS 0184	Function generator	MX-9300	Maxcom
ETS 0185	Digital multimeter	MX-9300	Maxcom
ETS 0186	Power supply	DF 1730	WJG
ETS 0187	Power supply		TPW/RFT
ETS 0189	Spectrum Analyzer	FSEB	Rohde & Schwarz
ETS 0190	Function generator	MX 2020	Maxcom
ETS 0191	Sweep function generator	7202	Dagatron
ETS 0192	Audio generator	7101	Dagatron
ETS 0193	Vibration table	N1-201-M	Sandbox
ETS 0194	Digital multimeter	PMM 208	Dagatron
ETS 0195	Thermo hygro recorder		Amarell
ETS 0196	Digital thermometer	AK-688	KD
ETS 0197	Digital thermometer		Prima
ETS 0198	Digital thermometer	ad 170th	ama-digit
ETS 0199	Digital thermometer	ad 31th	ama-digit
ETS 0200	Digital thermometer / hygro meter	ad 90h	ama-digit
ETS 0201	Digital thermometer / hygro meter	37950-10	Cole Parmer
ETS 0202	Digital thermometer	ad 15th	ama-digit
ETS 0203	Digital thermometer	Type K	Amarell
ETS 0204	Digital thermometer	ad 20th	ama-digit
ETS 0205	High voltage test generator	HA 3300 D	SPS electronic
ETS 0206	High voltage test accessoires	HVGZ 312	SPS electronic
ETS 0207	Socket-Outlet torque balance	F 37.13	PTL
ETS 0208	Unjointed Finger probe	P 10.05	PTL
ETS 0209	Flixible Finger probe	P 10.01	PTL
ETS 0210	Spring operated impact hammer	P 22.50	PTL
ETS 0211	Metallic ball	F 53.32	PTL
ETS 0212	Hazardous live probe	P 10.06	PTL
ETS 0213	Hazardous live probe	P 10.11	PTL

Registrationnumber : G0M20212-7419-E-16

No.	Test equipment	Type	Manufacturer
ETS 0214	Ball pressure test apparatus	T 10.02	PTL
ETS 0215	Glow Wire tester	T 03.14	PTL
ETS 0216	Force indicator 50N	P 10.31	PTL
ETS 0217	Millivolt meter	URV 55	Rohde & Schwarz
ETS 0218	RF probe	URV5-Z7	Rohde & Schwarz
ETS 0219	Power sensor	NRV-Z2	Rohde & Schwarz
ETS 0220	Insertion unit	URV5-Z4	Rohde & Schwarz
ETS 0221	ISDN-S0-Analyzer	K1403	Siemens
ETS 0222	ISDN Protocol Analyser	TE965	Tekelec Teleco.
ETS 0223	GSM/ PCN/ PCS-Simul.	TS8915B	Rohde & Schwarz
ETS 0224	GSM System Simulator	FTA	Rohde & Schwarz
ETS 0225	SIM Simulator		Orga
ETS 0226	SIM Editor		Orga
ETS 0227	Vibration table	TIRA vib	GenRad
ETS 0228	Climatic chamber	VT 4010	Vötsch
ETS 0229	Radio Commun. Tester	CMT 54	Rohde & Schwarz
ETS 0230	Radio Commun. Tester	CMD 65	Rohde & Schwarz
ETS 0231	Testreceiver	ESVS 30	Rohde & Schwarz
ETS 0232	Radiation test source	VSQ 1	MEB
ETS 0233	Direction coupler	RK 100	MEB
ETS 0234	Power meter	NRVD	Rohde & Schwarz
ETS 0235	RF-network-analyser	8752 C	Hewlett Packard
ETS 0236	RF-amplifier	100A100	Amplifier Research
ETS 0237	RF-amplifier	100W1000M1	Amplifier Research
ETS 0238	Field strength meter	FM 2000	Amplifier Research
ETS 0239	Isotr. field probe 40 GHz	FP 2080 Kit	Amplifier Research
ETS 0240	Isotr. field probe 1 GHz	FP 2000 Kit	Amplifier Research
ETS 0241	Pulse Generator	4050	PicoSecond PL
ETS 0242	Harmonics analyser	F 41B	Fluke
ETS 0243	AC-clamp 1000 A	80i 1000s	Fluke
ETS 0244	Burst generator	EFT 200	EM-Test
ETS 0245	Load dump generator	LD 200	EM-Test
ETS 0246	Voltage drop simulator	VDS 200	EM-Test
ETS 0247	Microsecond generator	MPG 200	EM-Test

Registrationnummer : G0M20212-7419-E-16

No.	Test equipment	Type	Manufacturer
ETS 0248	Switch unit	AN 200	EM-Test
ETS 0249	Coupling network	CNA 200	EM-Test
ETS 0250	Coupling clamp	ACC	EM-Test
ETS 0252	System controller	PSM 12	Rohde & Schwarz
ETS 0253	Spectrum analyser	FSIQ	Rohde & Schwarz
ETS 0254	RF generator	SMIQ 03	Rohde & Schwarz
ETS 0255	RF generator	SMIQ 03	Rohde & Schwarz
ETS 0256	RF generator	SMP 03	Rohde & Schwarz
ETS 0257	Step attenuator	RSP	Rohde & Schwarz
ETS 0258	Rubidium standard	RSTU	DATUM GmbH
ETS 0259	Power meter	NRVD	Rohde & Schwarz
ETS 0260	Power sensor	NRVD-Z1	Rohde & Schwarz
ETS 0261	Power sensor	NRVD-Z1	Rohde & Schwarz
ETS 0262	Switching unit	SSCU	Rohde & Schwarz
ETS 0263	Signaling unit		Wird
ETS 0264	Spectrum analyser	F 1048	HAMEG
ETS 0265	Loop antenna	HFRA 9150	Schwarzbeck
ETS 0267	RF signal generator	SMT 03	Rohde & Schwarz
ETS 0268	RF signal generator	SMP 02	Rohde & Schwarz
ETS 0270	RF signal generator	SMP 04	Rohde & Schwarz
ETS 0271	Test receiver	ESI 40	Rohde & Schwarz
ETS 0272	RF signal generator	SME 03	Rohde & Schwarz
ETS 0273	RF signal generator	SME 03	Rohde & Schwarz
ETS 0274	RF signal generator	SMY 01	Rohde & Schwarz
ETS 0275	Power sensor	NRV-Z51	Rohde & Schwarz
ETS 0276	Audio analyser	UPL	Rohde & Schwarz
ETS 0277	Power sensor	NRV-Z1	Rohde & Schwarz
ETS 0278	Power sensor	NRV-Z31	Rohde & Schwarz
ETS 0279	Step attenuator	RSP	Rohde & Schwarz
ETS 0280	Power meter	NRVD	Rohde & Schwarz
ETS 0281	Spectrum analyser	FSM	Rohde & Schwarz
ETS 0282	RF bridge	86207 A	Hewlett Packard
ETS 0283	RF bridge	86205 A	Hewlett Packard
ETS 0284	Field probe	11940 A	Hewlett Packard

Registrationnummer : G0M20212-7419-E-16

No.	Test equipment	Type	Manufacturer
ETS 0285	Field probe	11941 A	Hewlett Packard
ETS 0286	Limiter	11867 A	Hewlett Packard
ETS 0287	Test receiver	ESHS 10	Rohde & Schwarz
ETS 0288	Artificial mains	ESH2-Z5	Rohde & Schwarz
ETS 0289	Audio generator	TAG 101	Troneer
ETS 0290	Audio generator	TAG 101	Troneer
ETS 0291	Loop antenna	HFH2-Z2	Rohde & Schwarz
ETS 0292	RF generator	SMHU	Rohde & Schwarz
ETS 0293	Artificial mains	NNBM 8125	Schwarzbeck
ETS 0294	Biconical antenna	HK 116	Rohde & Schwarz
ETS 0295	LPD antenna	HL 223	Rohde & Schwarz
ETS 0296	Oscilloscope	TDS 520 A	Tektronix
ETS 0297	Power pulse generator	IGUF 2910	Schwarzbeck
ETS 0298	ICO tester	TS 1232	Rohde & Schwarz
ETS 0299	DECT protocol tester	TS 1220	Rohde & Schwarz
ETS 0300	RF amplifier	75 A 250	Amplifier Research
ETS 0301	Relay switch unit	RSU	Rohde & Schwarz
ETS 0302	Data line CDN	CM-I/O CD	Keytek
ETS 0303	Telecom line CDN	CM-TEL CD	Keytek
ETS 0304	Test receiver	ESHS 10	Rohde & Schwarz
ETS 0305	Test receiver	ESVS 10	Rohde & Schwarz
ETS 0306	Function generator	HP 33120A	Hewlett Packard
ETS 0307	Commu. Sign. Analyzer	CSA 803 A	Tektronix
ETS 0308	Spectrum analyzer	R 3361A	Advantest
ETS 0309	Anechoic chamber	AC 2	Frankonia
ETS 0310	Anechoic chamber	AC 3	Frankonia
ETS 0311	Anechoic chamber	AC 4	Frankonia
ETS 0312	Climatic chamber	VC 0033	Vötsch
ETS 0313	Power sensor	NRV-Z51	Rohde & Schwarz
ETS 0314	LPD antenna	HL 223	Rohde & Schwarz
ETS 0315	Biconical antenna	HK 116	Rohde & Schwarz
ETS 0316	Switcher	Hr 07-720	WISI
ETS 0317	Switcher	Hr 07-720	WISI
ETS 0318	Dial pulse/ DTMF tester	210	HE

Registrationnummer : G0M20212-7419-E-16

No.	Test equipment	Type	Manufacturer
ETS 0319	Opto link	GPIB 140	NI
ETS 0320	Opto link	GPIB 140	NI
ETS 0321	RF Millivoltmeter	URV 55	Rohde & Schwarz
ETS 0322	Insertion unit	URV5-Z4	Rohde & Schwarz
ETS 0323	DECT portable part	Gigaset 1000	SIEMENS
ETS 0324	DECT fix part	Gigaset 1000	SIEMENS
ETS 0325	DECT portable part		Philipps
ETS 0326	DECT fix part		Philipps
ETS 0327	Blue Unit	V 2.0	Nokia
ETS 0328	BT Protocol tester	PTW 60	Rohde & Schwarz
ETS 0330	Spectrum analyser	FSM	Rohde & Schwarz
ETS 0333	turn table	DE 350	Heinrich Deisel
ETS 0334	Controller	HD 100	Heinrich Deisel
ETS 0335	BT Development kit	CASIRA	CSR
ETS 0336	LPD Antenna	HL 223	Rohde & Schwarz
ETS 0337	Professional Power Amplifier	SE-1200	Wharfedale Pro
ETS 0338	Coupling network	KN002	ETS
ETS 0339	Isolating Transformer	KN003	ETS
ETS 0340	Thermometer		Proficell
ETS 0341	Thermometer		Proficell
ETS 0342	Thermometer		Proficell
ETS 0343	Thermometer		Proficell
ETS 0344	Thermometer		Proficell
ETS 0345	Thermometer		Proficell
ETS 0346	Thermometer		Proficell
ETS 0347	Current Probe	EZ-17	R & S
ETS 0348	RF Millivolt meter	URV 55	R & S
ETS 0349	Insertion unit	URV5-Z4	R & S
ETS 0350	Horn Antenna	BBHA 9120-C	Schwarzbeck
ETS 0351	RF amplifier	DWT-1857	Microwave
ETS 0352			
ETS 0353			
ETS 0354	RF amplifier	DBS-0408N423	Microwave
ETS 0355	high pass	H03G12G3	Microwave
ETS 0356	high pass	H03G12G3	Microwave
ETS 0357	high pass	H08G18G3	Microwave
ETS 0358	RF amplifier	AFD3-010040-15-In	MITEQ
ETS 0359	RF amplifier	M/N AM-1331	MITEQ

Registrationsnummer : G0M20212-7419-E-16

No.	Test equipment	Type	Manufacturer
ETS 0360	RF amplifier	DBS-0408N423	Microwave
ETS 0361	RF amplifier	DBS 1826N515	Microwave
ETS 0362	high pass	H03G12G3	Microwave
ETS 0363	high pass	H08G18G3	Microwave
ETS 0364	high pass	H08G18G3	Microwave
ETS 0365	Notch filter 2.4 GHz	WRCT2.40/248	Wain Wright
ETS 0366	high pass	H08G18G3	Microwave
ETS 0367	high pass	H03G12G3	Microwave
ETS 0368	Notch filter 0.5-1 GHz	BN86883	Schomandl
ETS 0369	Notch filter 210-500 MHz	BN86882	Schomandl
ETS 0370	Notch filter 15-90 MHz	BN86880	Schomandl
ETS 0371	Notch filter 85-250 MHz	BN86881	Schomandl
ETS 0372	Direction coupler	RK 100	MEB
ETS 0373	Direction coupler	DC3001	emv
ETS 0374	Insertion Unit	URV 5-Z2	R&S
ETS 0375	RCo Network	8 Ohm	Erika Fiedler
ETS 0376	RCo Network	300 Ohm	Erika Fiedler
ETS 0377	RCo Network	10K Ohm	Erika Fiedler
ETS 0378	RCo Network	10K Ohm	Erika Fiedler
ETS 0379	Abschlusswiderstand	150 Ohm	Erika Fiedler
ETS 0380	Abschlusswiderstand	150 Ohm	Erika Fiedler
ETS 0381	RCi Network	100 Ohm	Erika Fiedler
ETS 0382	RCi Network	2.2K Ohm	Erika Fiedler
ETS 0383	RCi Network	1K Ohm	Erika Fiedler
ETS 0384	RCi Network	22K Ohm	Erika Fiedler
ETS 0385	RCi Network	22K Ohm	Erika Fiedler
ETS 0386	Bandpass 0.5-3kHz	nach EN 55020-D.2	
ETS 0387	Tiefpass 15 kHz	nach EN 55020-D.1	
ETS 0388	Tiefpass 15 kHz	nach EN 55020-D.1	
ETS 0389	Bandpass 0.5-3kHz	nach EN 55020-D.2	
ETS 0390	Netz Filter	Mains Filter M'	Erika Fiedler
ETS 0391	Bewertungsnetzwerk	nach EN 55020-B.3	
ETS 0392	Matching Network	MN 50-150Ohm	Erika Fiedler
ETS 0393	Matching Network	MN 50-150Ohm	Erika Fiedler
ETS 0394	RCo Network	Loudspeaker Load 8 Ohm	Erika Fiedler
ETS 0395	RCo Network	Loudspeaker Load 8 Ohm	Erika Fiedler
ETS 0396	RCo Network	Loudspeaker Load 8 Ohm	Erika Fiedler
ETS 0397	RCo Network	Phone Load 300 Ohm	Erika Fiedler
ETS 0398	RCo Network	Phone Load	Erika Fiedler

Registrationnummer : G0M20212-7419-E-16

No.	Test equipment	Type	Manufacturer
		300 Ohm	
ETS 0399	RCo Network	Phone Load 300 Ohm	Erika Fiedler
ETS 0400	RCo Network	Audio Adapter	Erika Fiedler
ETS 0401	RCo Network	Audio Adapter	Erika Fiedler
ETS 0402	Coupling Unit	SR (47K Ohm)	Erika Fiedler
ETS 0403	Coupling Unit	SR (47K Ohm)	Erika Fiedler
ETS 0404	Coupling Unit	SR (47K Ohm)	Erika Fiedler
ETS 0405	Coupling Unit	SR (2.2K Ohm)	Erika Fiedler
ETS 0406	Coupling Unit	SR (22K Ohm)	Erika Fiedler
ETS 0407	Coupling Network	"M"	Erika Fiedler
ETS 0408	Coupling Network	"A"	Erika Fiedler
ETS 0409	Coupling Network	"A"	Erika Fiedler
ETS 0410	Coupling Network	"A"	Erika Fiedler
ETS 0411	Coupling Network	"L"	Erika Fiedler
ETS 0412	Coupling Network	"L"	Erika Fiedler
ETS 0413	Coupling Network	"L"	Erika Fiedler
ETS 0414	A/V adapter	Type 2	Erika Fiedler
ETS 0415	A/V adapter	Type 2	Erika Fiedler
ETS 0416	A/V adapter	Type 2	Erika Fiedler
ETS 0417	A/V adapter	Type 3	Erika Fiedler
ETS 0418	A/V adapter	Type 1	Erika Fiedler
ETS 0419	A/V adapter	Type 1	Erika Fiedler
ETS 0420	Verstärker 0.1-1 GHz	M/N AM-1331	MITEC
ETS 0421	Verstärker 1-4 GHz	AFD3-010040-15-LN	MITEC
ETS 0422	Verstärker 4-8 GHz	DBS-0408N423	Narda
ETS 0423	Verstärker 8-18 GHz	DWT-18057	Narda
ETS 0424	Verstärker 18-26.5 GHz	DBS-1826N515	Narda
ETS 0425	T-Network	ESH 3-Z4	R&S
ETS 0426	CDN	T4 HF	MEB
ETS 0427	Power sensor	NRV-Z6	R&S
ETS 0428	4-WIRE ISN mit B1	ENY41	R&S
ETS 0429	Current Probe Test Jig	SW14 7LY	Chase
ETS 0430	RF signal generator	SML02	R&S
ETS 0431	AC Mains Adaptor	BS5733	Travel Emporium
ETS 0432	RF Verstärkermatrix	RSU-ETS-BT	ETS
ETS 0433	RF Verstärkermatrix	RSU-ETS-CTR6	ETS
ETS 0434	Reserviert Tre	RSU-ETS-GSM	
ETS 0435	HP-Filter	H1G04G01	Microwave
ETS 0436	HP-Filter	H1G04G01	Microwave
ETS 0437	HP-Filter	H0G408G1	Microwave
ETS 0438	HP-Filter	H0G408G1	Microwave

Registrierungsnummer : G0M20212-7419-E-16

No.	Test equipment	Type	Manufacturer
ETS 0439	Reserviert Tre		
ETS 0440	Reserviert Tre		
ETS 0441	Bluetooth Protcol Tester	PTW 60	R & S
ETS 0442	Nokia Tester for Bluetooth 1.1	DTL - 1	Nokia
ETS 0443	IBM BT PC Card	BTPCNI01	IBM / Motorola
ETS 0444	Sony BT DUN Modem	BTA- NW 1	Sony
ETS 0445	RF-Attenuattor 6dB	50FH-006-300	JFK
ETS 0446	RF-Attenuattor 30dB	50FH-030-300	JFK
ETS 0447	KFZ-Bordnetznachbildung	LN-KFZ/200	R. Heine Hochfrequenztechn.
ETS 0448	RF Power Amplifier	AR 60SIG3	AR Amplifier Resarch
ETS 0449	Stäubli Robot	RX90B L	Stäubli
ETS 0450	Stäubli Robot Controller	CS/MBs&p	Stäubli
ETS 0451	DASY 4 Measurement Server		Schmidt & Partner
ETS 0452	Control Pendant		Stäubli
ETS 0453	Compaq Computer	Pentium IV 2 GHz	Schmidt & Partner
ETS 0454	Dabu Acquisition Electronis	DAE3V1	Schmidt & Partner
ETS 0455	Dummy Probe		Schmidt & Partner
ETS 0456	Dosimetric E-Field Probe	ET3DV6	Schmidt & Partner
ETS 0457	Dosimetric E-Field Probe	ET3DV6	Schmidt & Partner
ETS 0458	Dosimetric H-Field Probe	H3DV6	Schmidt & Partner
ETS 0459	System Validation Kit	D900V2	Schmidt & Partner
ETS 0460	System Validation Kit	D1800V2	Schmidt & Partner
ETS 0461	System Validation Kit	D1900V2	Schmidt & Partner
ETS 0462	System Validation Kit	D2450V2	Schmidt & Partner
ETS 0463	Probe Alignment Unit	LBV2	Schmidt & Partner
ETS 0464	SAM Twin phantom	V4.0	
ETS 0465	Mounting Device	V 3.1	
ETS 0466	Directional Coupler	HP 87300B	
ETS 0467	Universal Radio Communication T	CMU 200	R & S
ETS 0468			
ETS 0469	Dielectric Probe Kit	85070C	Agilent
ETS 0470	Amplifier	AM-1300-1103	MITEQ

Registrationnumber : G0M20212-7419-E-16

2.4 Testresults acc. EN 301 489 - 1

1st test
 test after modification
 production test

Test case	Subclause	Required	Test passed	Test failed
Emission radiated	8.2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Emission cond. DC	8.3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Emission cond. AC	8.4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Harmonic current	8.5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Voltage Fluctuations	8.6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RF Immunity	9.2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Electrostatic Discharge	9.3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Fast transient com. Mode	9.4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radio frequ. com. mode	9.5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Transient a. Surge in vehicular enviroment	9.6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Voltage Dips and Interr.	9.7	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Surges com. & diff. Mode	9.8	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Registrationnumber : G0M20212-7419-E-16

2.3.1 Carried out emission tests

This test is only applicable to ancillary equipment not incorporated in the radio equipment and intended to be measured on a stand alone basis, as declared by the manufacturer. This test shall be performed on a representative configuration of the ancillary equipment.

This test is in accordance to subclause 8.2 of EN 301 489-1

2.3.1.1 Spurious Emission (EN 55022)

2.3.1.1.1 Test Equipment

a) Antenna (HK116)

For your reference please find it in our test equipment list at page 8 to 20 as number : **12.**

b) Antenna (HL223)

For your reference please find it in our test equipment list at page 8 to 20 as number : **13.**

c) Generator SMG (R&S)

For your reference please find it in our test equipment list at page 8 to 20 as number : **33.**

d) Monitoring System

For your reference please find it in our test equipment list at page 8 to 20 as number : **71.**

e) Interphone System

For your reference please find it in our test equipment list at page 8 to 20 as number : **72.**

f) Anechoic Chamber

For your reference please find it in our test equipment list at page 8 to 20 as number : **86.**

g) Radiocommunication tester

For your reference please find it in our test equipment list at page 8 to 20 as number : **89.**

e) ESHS-10

For your reference please find it in our test equipment list at page 8 to 20 as number : **1.**

f) ESVS-10

For your reference please find it in our test equipment list at page 8 to 20 as number : **3.**

2.3.1.1.2 Test Procedures

- Test configuration

The test configuration corresponds to the standard EN 55022. The equipment under test is placed on a non metallic table with 0,8m high.

The power supply and the RF connection points are close to the equipment under test at the floor inside a connection box. The cables to this connection box are shielded and below the double floor.

The receiving antenna is placed in a height at 1,0 to 4,0m, in a distance of 10m. The measurement receiver are placed in a special room. The observation of the equipment under test is realized by 3 video cameras and by a microphone.



- Test parameters and marginal conditions

The test are carried out with horizontal and vertical polarisation of the antenna in a frequency range of 30 MHz to 1000 MHz . Further information please find in the test protocol.

The equipment under test fulfils the requirement in accordance with the criteria of the standard

2.3.1.2 Conducted Emission (EN 55022)

This test is applicable for base station and ancillary equipment for fixed use that may have DC cables longer than 3m and also applicable for base station and / or ancillary equipment for fixed use powered by AC mains.

This test is in accordance to subclause 8.3 and 8.4 of EN 301 489-1

2.3.1.2.1 Test Equipment

- a) Artificial mains (ESH3-Z5)
For your reference please find it in our test equipment list at page 8 to 20 as number : **40.**
- b) Artificial mains (ESH3-Z4)
For your reference please find it in our test equipment list at page 8 to 20 as number : **41.**
- c) Generator SMG (R&S)
For your reference please find it in our test equipment list at page 8 to 20 as number : **33.**
- d) Monitoring System
For your reference please find it in our test equipment list at page 8 to 20 as number : **71.**
- e) Interphone System
For your reference please find it in our test equipment list at page 8 to 20 as number : **72.**
- f) Anechoic Chamber
For your reference please find it in our test equipment list at page 8 to 20 as number : **86.**
- g) Radiocommunication tester
For your reference please find it in our test equipment list at page 8 to 20 as number : **89.**
- h) Artificial mains (ESH3-Z6)
For your reference please find it in our test equipment list at page 8 to 20 as number : **42.**
- i) Artificial mains (NNB 11)
For your reference please find it in our test equipment list at page 8 to 20 as number : **43.**
- j) Artificial mains (NNB 111)
For your reference please find it in our test equipment list at page 8 to 20 as number : **44.**

2.3.1.2.2 Test Procedures

- Test configuration

The test configuration is contained inside of a shielded chamber and corresponds to the standard EN 55022 . The equipment under test is placed in the facility on a wooden table 0.8m high. The equipment under test is connected with the artificial mains network (AMN) in a distance of 0,8m and also 0,8m from other subassembly and metallic area. The observation of the equipment under test is realized by 3 video cameras and by a microphone.



- Test parameters and marginal conditions

The test are carried out with a nominal impedance by $50\Omega / 50\mu\text{H}$ of the AMN in a frequency range 150 kHz to 30 MHz.

Furter information please find in test report.

The equipment under test fulfils the requirement in accordance with the criteria of the standard

2.3.1.3 Harmonic Current Emission /Voltage Fluctuations and Flicker (EN 61000-3-2/-3)

This test is in accordance to subclause 8.5 and 8.6 of EN 301 489-1

2.3.1.3.1 Test Equipment

a) ECAT Testsystem

For your reference please find it in our test equipment list at page 8 to 20 as number : **53 to 63.**

b) PC Novell network system

For your reference please find it in our test equipment list at page 8 to 20 as number : **82.**

2.3.1.3.2 Test Procedures

- Test configuration

The test configuration is correspondence to the standard EN 61000-3-2/-3. The equipment under test is placed on a wooden table with a height of 0,8m in the EMC lab.

- Test parameters and marginal conditions

The harmonic test are carried out in according the classification A,B,C,D of the standard EN 61000-3-2.

The flicker test are carried out in according the time interval of the standard EN 61000-3-3. Both tests are carried out with above mentioned equipments with 230V and 50 Hz. Further information please find in test protocol.

The equipment under test fulfils the requirement in accordance with the criteria of the standard.

2.3.2 Carried out immunity tests

2.3.2.1 RF Electromagnetic Field (80-2000 MHz)

This test is applicable for base station, portable and ancillary equipment
This test is in accordance to subclause 9.2 of EN 301 489-1

2.3.2.1.1 Test Equipment

This test is applicable for base station, portable and ancillary equipment
This test is in accordance to subclause 9.2 of EN 301 489-1

2.3.2.1.2 Test Equipment

- a) Antenna (HK116)
For your reference please find it in our test equipment list at page 8 to 20 as number : **12.**
- b) Antenna (HL223)
For your reference please find it in our test equipment list at page 8 to 20 as number : **13.**
- c) Antenna (BBHA 9120)
For your reference please find it in our test equipment list at page 8 to 20 as number : **350.**
- d) Generator SMG (R&S)
For your reference please find it in our test equipment list at page 8 to 20 as number : **33.**
- e) Amplifier (AR)
For your reference please find it in our test equipment list at page 8 to 20 as number : **448.**
- f) Monitoring System
For your reference please find it in our test equipment list at page 8 to 20 as number : **71.**
- g) Interphone System
For your reference please find it in our test equipment list at page 8 to 20 as number : **72.**
- h) Anechoic Chamber
For your reference please find it in our test equipment list at page 8 to 20 as number : **86.**
- i) Radiocommunication tester
For your reference please find it in our test equipment list at page 8 to 20 as number : **89.**

2.3.2.1.3 Test Procedures

- Test configuration

The test configuration is contained inside of a shielded chamber and corresponds to the standard EN 61000-4-3 /3/. The equipment under test is placed in the facility on a wooden table 0.8m high on the centre axis of the chamber. The power supply and the RF connection points are close to the equipment under test at the floor of the chamber inside a connection box. The cables to this connection box are shielded and below the double floor. The transmitting antenna is placed in a height of 1.5m, in a distance of 3.0m. The RF-generators are placed in a special room adjacent to the chamber. The observation of the equipment under test is realized by 3 video cameras and by a microphone.

- Test parameters and marginal conditions

The tests are carried out with a field strength by 3 V/m (measured in the unmodulated field) with amplitude modulated signal by a depth of 80 % by a sinusoidal audio signal of 1000 Hz. If the wanted signal is modulated with 1000 Hz, then an audio signal of 400 Hz shall be used. The logarithmic step was 1% and the remaining time was 1s. Further informations please find in test protocol.

2.3.2.1.4 Test Result

- EUT operate as intended with no loss of primary and secondary user functions or stored data, as declared by the manufacturer, and the communication link have been maintained during the test.
- The communication link was lost during the test. But primary and secondary functions , which were lost during the test, were recoverable by operating the user control or reset functions.
- Ancillary equipment passed with the performance criteria CT acc. to /1/ subclause 6.4
- Ancillary equipment did not pass with the performance criteria CR acc. to /1/ subclause 6.4

The equipment under test fulfils the requirement in accordance with the criteria of the standard.

2.3.2.2 *Electrostatic discharge*

This test is applicable for base station, mobile, portable and ancillary equipment.
This test is in accordance to subclause 9.3 of EN 301 489-1

2.3.2.2.1 Test Equipment

a) ESD - generator minizap

For your reference please find it in our test equipment list at page 8 to 20 as number : **65**.

b) Power supply

For your reference please find it in our test equipment list at page 8 to 20 as number : **46 to 50**.

2.3.2.2.2 Test Procedures

- Test configuration

The test configuration is in correspondence to the standard EN 61000-4-2 /4/. The equipment under test is placed on a wooden table with one metal plate on its top and one metal plate under the table, which is grounded. Both plates are connected with two 470 kΩ resistor in series.

- Test parameters and marginal conditions

The test is carried out with $\pm 2\text{kV}$ and $\pm 4\text{kV}$ contact discharge and $\pm 2\text{kV}$, $\pm 4\text{kV}$ and $\pm 8\text{kV}$ air discharge. The tested points please find in the test protocol.

2.3.2.2.3 Test Result

- EUT operate as intended with no loss of primary and secondary user functions or stored data, as declared by the manufacturer, and the communication link have been maintained during the test.
- The communication link was lost during the test. But primary and secondary functions , which were lost during the test, were recoverable by operating the user control or reset functions.
- Ancillary equipment passed with the performance criteria TT acc. to /1/ subclause 6.4
- Ancillary equipment did not pass with the performance criteria TR acc. to /1/ subclause 6.4

The equipment under test fulfils the requirement in accordance with the criteria of the standard

2.3.2.3 *Fast Transients common mode*

This test is applicable for base station and ancillary equipment.
This test is in accordance to subclause 9.4 of EN 301 489-1

2.3.2.3.1 Test Equipment

- a) ECAT Controlcentre
For your reference please find it in our test equipment list at page 8 to 20 as number : **53.**
- b) EFT Simulator
For your reference please find it in our test equipment list at page 8 to 20 as number : **54.**
- c) Module network coupler
For your reference please find it in our test equipment list at page 8 to 20 as number : **55.**
- d) Capacitive coupling clamp
For your reference please find it in our test equipment list at page 8 to 20 as number : **58.**
- e) PC Novell network system
For your reference please find it in our test equipment list at page 8 to 20 as number : **82.**
- f) Power supply
For your reference please find it in our test equipment list at page 8 to 20 as number : **46 to 50.**

2.3.2.3.2 Test Procedures

- Test configuration

The test configuration is in correspondence to the standard EN 61000-4-4 /5/. The equipment under test is placed on a wooden table with a height of $0,8\text{m} \pm 0,08\text{m}$. The table stands on metal plate which is grounded.

- Test parameters and marginal conditions

The tests are carried out with 0,5 kV open circuit voltage on signal, control and DC power ports and with 1 kV open circuit voltage on AC mains power input ports. The applied voltage please find in the test protocol.

2.3.2.3.3 Test Result

- EUT operate as intended with no loss of primary and secondary user functions or stored data, as declared by the manufacturer, and the communication link have been maintained during the test.
- The communication link was lost during the test. But primary and secondary functions , which were lost during the test, were recoverable by operating the user control or reset functions.
- Ancillary equipment passed with the performance criteria TT acc. to /1/ subclause 6.4
- Ancillary equipment did not pass with the performance criteria TR acc. to /1/ subclause 6.4

The equipment under test fulfils the requirement in accordance with the criteria of the standard.

2.3.2.4 Radio frequency common mode

This test is applicable for base station, mobile, and ancillary equipment.
This test is in accordance to subclause 9.5 of EN 301 489-1.

2.3.2.4.1 Test Equipment

- a) RF Generator
For your reference please find it in our test equipment list at page 8 to 20 as number : 33.
- b) RF Amplifier
For your reference please find it in our test equipment list at page 8 to 20 as number : 37.
- c) Filter system IEC 1000-4-6
For your reference please find it in our test equipment list at page 8 to 20 as number : 64.
- d) EM Injection Clamp
For your reference please find it in our test equipment list at page 8 to 20 as number : 66.
- e) PC Novell network system
For your reference please find it in our test equipment list at page 8 to 20 as number : 82.
- f) Power supply
For your reference please find it in our test equipment list at page 8 to 20 as number : 46 to 50.
- g) RF Millivoltmeter
For your reference please find it in our test equipment list at page 8 to 20 as number : 116.
- h) Straight-through probe
For your reference please find it in our test equipment list at page 8 to 20 as number : 117.
- i) Calibration fixture
For your reference please find it in our test equipment list at page 8 to 20 as number : 67.
- j) Radiocommunication tester
For your reference please find it in our test equipment list at page 8 to 20 as number : 89.

2.3.2.4.2 Test Procedures

- Test configuration

The test configuration is in correspondence to the standard EN 61000-4-6 /6/. The test is carried out on a wooden table with a grounded metal plate on its top. The equipment under test is placed on an insulating support of 0,1 metre height above this metal plate.

- Test parameters and marginal conditions

The tests are carried out with a Voltage of 3V RMS (measured unmodulated) with amplitude modulated signal by a depth of 80 % by a sinusoidal audio signal of 1000 Hz. If the wanted signal is modulated at 1000 Hz, then the test signal of 400 Hz shall be used. The frequency steps in the frequency range 150 kHz - 5 MHz are 50 kHz and in the frequency range 5 MHz - 80 MHz the frequency increments with 1 % of the actual frequency. The remaining time is 1s. The tested ports please find in the test protocol.

2.3.2.4.3 Test Result

- EUT operate as intended with no loss of primary and secondary user functions or stored data, as declared by the manufactor, and the communication link have been maintained during the test.
- The communication link was lost during the test. But primary and secondary functions , which were lost during the test, were recoverable by operating the user control or reset functions.
- Ancillary equipment passed with the performance criteria CT acc. to /1/ subclause 6.4
- Ancillary equipment did not pass with the performance criteria CR acc. to /1/ subclause 6.4

The equipment under test fulfils the requirement in accordance with the criteria of the standard.

2.3.2.5 *Transient and Surges in vehicular environment*

These test are applicable to mobile radio and ancillary equipment intended for use in a vehicular environment.

This test is in accordance to subclause 9.6 of EN 301 489- 1.

2.3.2.5.1 Test Equipment

a) Simulator for Load-Dump-Impulse

For your reference please find it in our test equipment list at page 8 to 20 as number : **152 and 153.**

b) Programable Power Supply

For your reference please find it in our test equipment list at page 8 to 20 as number : **159.**

2.3.2.5.2 Test Procedures

- Test configuration

The test configuration is in correspondance to the standard ISO 7637 - 1 / - 2 /7/, /8/. The test is carried out on a wooden table with a grounded metal plate on its top. The equipment under test is placed on an insulating support of 100 mm height above this metal plate.

- Test parameters and marginal conditions

The tests are carried out are the pulses according to subclause 9.6.2.1 and 9.6.2.2 of EN 301 489- 1. The overview please find in the test protocol.

2.3.2.5.3 Test Result

- EUT operate as intended with no loss of primary and secondary user functions or stored data, as declared by the manufactor, and the communication link have been maintained during the test.
- The communication link was lost during the test. But primary and secondary functions , which were lost during the test, were recoverable by operating the user control or reset functions.

The equipment under test fulfils the requirement in accordance with the criteria of the standard.

2.3.2.6 Voltage dips and interruptions

This test is applicable for base station and fixed ancillary equipment, powered by AC mains.
This test is in accordance to subclause 9.7 of EN 301 489-1.

2.3.2.6.1 Test Equipment

a) ECAT Testsystem

For your reference please find it in our test equipment list at page 8 to 20 as number : **53 to 63.**

b) PC Novell network system

For your reference please find it in our test equipment list at page 8 to 20 as number : **82.**

2.3.2.6.2 Test Procedures

- Test configuration

The test configuration is in correspondence to the standard EN 61000-4-11 /9/. The equipment under test is placed on a wooden table with a height of 0,8 metre.

- Test parameters and marginal conditions

The test levels corresponding to a reduction of the supply voltage of 30 % (for 10ms), 60 % (for 100ms) and > 95 % (for 5s). The applied voltage please find in the test protocol.

2.3.2.6.3 Test Result

For a voltage dip corresponding to a reduction of the supply voltage of 30% for 10 ms :

- EUT operate as intended with no loss of primary and secondary user functions or stored data, as declared by the manufacturer, and the communication link have been maintained during the test.
- The communication link was lost during the test. But primary and secondary functions , which were lost during the test, were recoverable by operating the user control or reset functions.
- Ancillary equipment passed with the performance criteria CT acc. to /1/ subclause 6.4
- Ancillary equipment did not pass with the performance criteria CR acc. to /1/ subclause 6.4

For a voltage dip corresponding to a reduction of the supply voltage of 60% for 100 ms :

- EUT operate as intended with no loss of primary and secondary user functions or stored data, as declared by the manufacturer, and the communication link have been maintained during the test.
- The communication link was lost during the test. But primary and secondary functions , which were lost during the test, were recoverable by operating the user control or reset functions.
- Ancillary equipment passed with the performance criteria CT acc. to /1/ subclause 6.4
- Ancillary equipment did not pass with the performance criteria CR acc. to /1/ subclause 6.4

For a voltage interruption corresponding to a reduction of the supply voltage of > 90% for 5000 ms :

- The equipment was battery back-up powered and pass with the performance criteria TT acc. to /1/ subclause 6.5 or TR acc. to /1/ subclause 6.
- The equipment was not battery back-up powered but it did not lose user data.
- The equipment was not battery back-up powered and it lost user data.

The equipment under test fulfils the requirement in accordance with the criteria of the standard.

2.3.2.7 *Transients surge common and differential mode*

This test is applicable for base station and fixed ancillary equipment.
This test is in accordance to subclause 9.8 of EN 301 489-1.

2.3.2.7.1 Test Equipment

- a) ECAT Controlcentre
For your reference please find it in our test equipment list at page 8 to 20 as number : **53**.
- b) Module Surge with DC coupler
For your reference please find it in our test equipment list at page 8 to 20 as number : **57**.
- b) PC Novell network system
For your reference please find it in our test equipment list at page 8 to 20 as number : **82**.
- c) Power supply
For your reference please find it in our test equipment list at page 8 to 20 as number : **46 to 50**.

2.3.2.7.2 Test Procedures

- Test configuration

The test configuration is in correspondence to the standard EN 61000-4-5 /10/. The equipment under test is placed on a wooden table with a height of 0,8m. The table stands on metal plate which is grounded.

- Test parameters and marginal conditions

The tests are carried out with 1 kV open circuit voltage for common mode and with 0,5 kV open circuit voltage for differential mode. Further informations please find in the test protocol.

2.3.2.7.3 Test Result

- EUT operate as intended with no loss of primary and secondary user functions or stored data, as declared by the manufacturer, and the communication link have been maintained during the test.
- The communication link was lost during the test. But primary and secondary functions , which were lost during the test, were recoverable by operating the user control or reset functions.
- Ancillary equipment passed with the performance criteria TT acc. to /1/ subclause 6.4
- Ancillary equipment did not pass with the performance criteria TR acc. to /1/ subclause 6.4

The equipment under test fulfils the requirement in accordance with the criteria of the standard.

2.3.3 Test protocols

Radiated emission	40-41
Conducted emission	42
Harmonics	43
Flicker	44
RF Field	45
ESD	46
Burst	47
RF - common mode	48
Transients and Surges	49
V - Dips	50
Surge	51

Radio Noise Field Strength

Emission

Standard : GSM 11.10-1Reg.-no. : G0M20212-7419-E-16Device : C2D-SI 900/1800Date : 12.12.2002/ 13.12.2002Operator : _____

Temperature	: 23	°C
Pressure	: 993	hPa
Rel. humidity	: 55	%

Frequency Range / Polarization	Passed	Failed	Number of rechecks
30 MHz - 4 GHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	0

Comment: See attached diagrams.

Registrationnumber : G0M20212-7419-E-16

Radio Noise Field Strength Emission

Standard : EN 301 489-1 subclause 8.2

Reg.-no. : G0M20212-7419-E-16

Device : C2D-SI 900/1800

Date : 12.12.2002

Operator : _____

Class : B

Temperature	: 23 °C
Pressure	: 993 hPa
Rel. humidity	: 55 %

Frequency Range / Polarization	Antenna	Passed	Failed	Number of rechecks
30 MHz - 200 MHz / vertical	HK 116	<input type="checkbox"/>	<input type="checkbox"/>	0
30 MHz - 200 MHz / horizontal	HK 116	<input type="checkbox"/>	<input type="checkbox"/>	0
200 MHz - 1000 MHz /vertical	HL 223	<input type="checkbox"/>	<input type="checkbox"/>	0
200 MHz - 1000 MHz / horizontal	HL 223	<input type="checkbox"/>	<input type="checkbox"/>	0

Comment: For the tested device not required acc. EN 301 489-1.

Registrationnumber : G0M20212-7419-E-16



Conducted Emission

Emission

Standard : EN 301 489-1 subclause 8.3/8.4

Reg.-no. : G0M20212-7419-E-16

Device : C2D-SI 900/1800

Date : 12.12.2002

Operator : _____ *3*

Temperature : 23 °C
 Pressure : 993 hPa
 Rel. humidity: 55 %

Frequency Range	Network	Passed	Failed	Number of rechecks
150 kHz - 30 MHz	R & S	<input type="checkbox"/>	<input type="checkbox"/>	0

Comment: For the tested device not required acc. EN 301 489-1.

Registrationnumber : G0M20212-7419-E-16



Harmonics current

Harmonics

Standard : EN 301 489-1 subclause 8.5


Reg.-no. : G0M20212-7419-E-16

Device : C2D-SI 900/1800

Date : 12.12.2002

Operator : _____ *Z*

Temperature	: 23 °C
Pressure	: 993 hPa
Rel. humidity	: 55 %

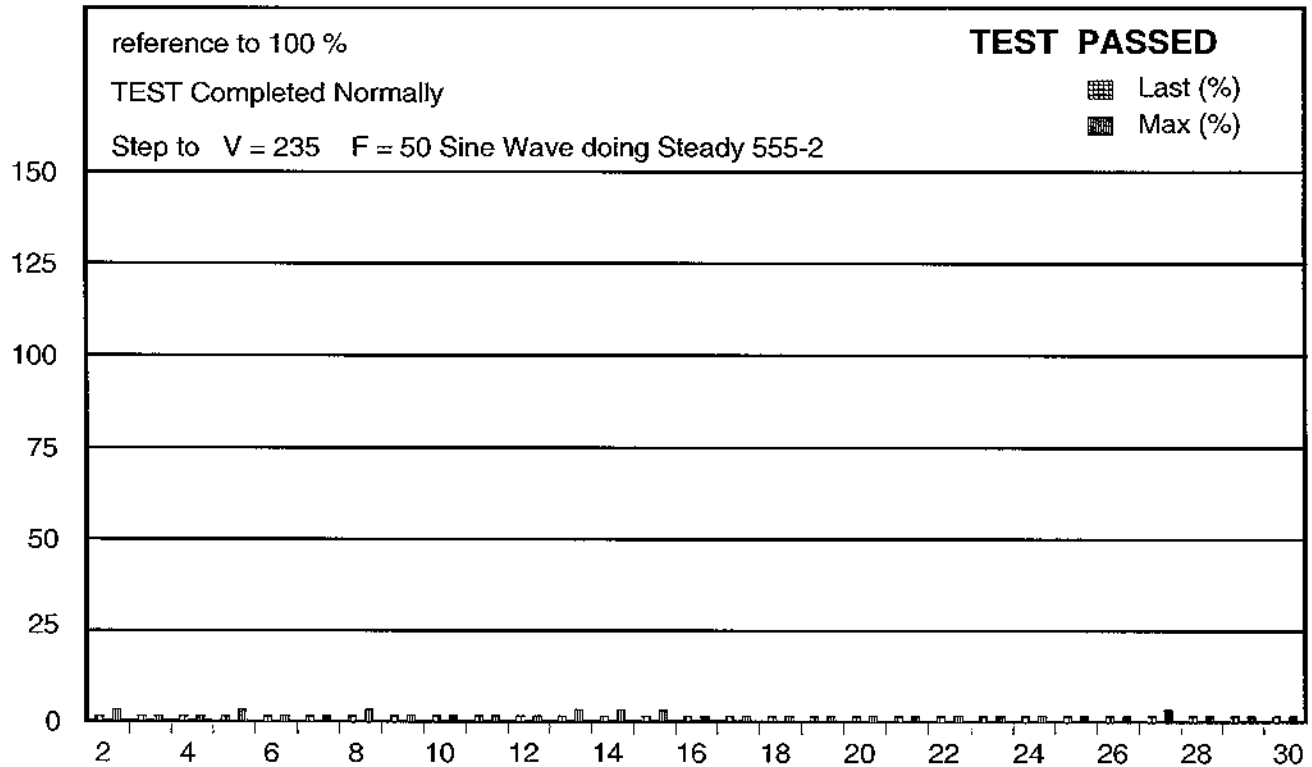

Passed : yes / no

Comment: For the tested device not required acc. EN 301 489-1.

Registrationnumber : G0M20212-7419-E-16

Voltage Fluctuations

Flicker

Standard : EN 301 489-1 subclause 8.6

Reg.-no. : G0M20212-7419-E-16

Device : C2D-SI 900/1800

Date : 12.12.2002

Operator : _____ *z*

Temperature	: 23	°C
Pressure	: 993	hPa
Rel. humidity	: 55	%

P_{st}	---
P_{lt}	/
dt (%)	---
d (max)	0
dc (%)	0

Passed : yes / no

Comment: For the tested device not required acc. EN 301 489-1.



Radiofrequency elektromagneticfield Immunity (80 MHz to 2000 MHz)

RF Field

Standard : EN 301 489-1 subclause 9.2

Reg.-no. : G0M20212-7419-E-16

Device : C2D-SI 900/1800


Date : 12.12.2002

Operator : _____ *z*

Testequipment : Anechoic Chamber

Temperature	: 23 °C
Pressure	: 993 hPa
Rel. humidity	: 55 %

Severity Level : 2 (3 V/m)

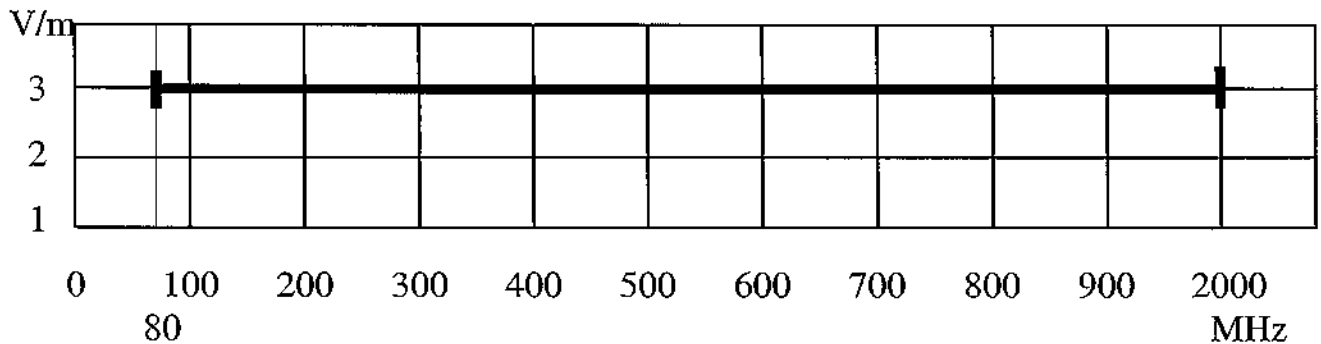

The equipment meets the requirements	yes	no
	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Comment: The RXQUAL value has not been degraded during the RF immunity test applying 3V/m to the EUB.

Registrationnumber : G0M20212-7419-E-16



Electrostatic Discharge

ESD

Standard : EN 301 489-1 subclause 9.3

Reg.-no. : G0M20212-7419-E-16

Device : C2D-SI 900/1800

Date : 12.12.2002

Operator : _____ *3*

Temperature : 23 °C
 Pressure : 993 hPa
 Rel. humidity: 55 %

Testpoint	Table (T) Floor (F)	Contact (C) Air (A)	Voltage (kV)	Polarity (+/-)
Housing	T	A	2, 4, 8	+/-
Housing	T	C	2, 4	+/-
Metal Connector	T	C	2, 4	+/-

Remarks :

The equipment meets the requirements	yes	no
	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Registrationnumber : G0M20212-7419-E-16



Fast transients, common mode

Burst

Standard : EN 301 489-1 subclause 9.4

Reg.-no. : G0M20212-7419-E-16

Device : C2D-SI 900/1800

Date : 12.12.2002

Operator : _____

Temperature : 23 °C
 Pressure : 993 hPa
 Rel. humidity: 55 %

Testport	Voltage (kV)	Polarity (+/-)	Waveform T _r / T _h	Repetition Frequency (kHz)
AC-Power line	1	ALT 1	5/50 ns	5

Comment: For the tested device not required acc. EN 301 489-1.

The equipment meets the requirements	yes	no
	<input type="checkbox"/>	<input type="checkbox"/>

Registrationnumber : G0M20212-7419-E-16

Conducted Immunity

RF - common mode

Standard : EN 301 489-1 subclause 9.5

Reg.-no. : GOM20212-7419-E-16

Device : C2D-SI 900/1800

Date : 12.12.2002

Operator : _____ *6*

Temperature	: 23	°C
Pressure	: 993	hPa
Rel. humidity	: 55	%

Testport	Voltage (rms)	Modulation Frequenz	Frequency Range
AC-Power line	3	1 kHz	150 kHz - 80 MHz

Comment: For the tested device not required acc. EN 301 489-1.

The equipment meets the requirements	yes	no
	<input type="checkbox"/>	<input type="checkbox"/>

Registrationnumber : GOM20212-7419-E-16



Transients and surges, vehicular environment

Transients and Surges

Standard : EN 301 489- 1 subclause 9.6

Reg.-no. : G0M20212-7419-E-16

Device : C2D-SI 900/1800

Date : 12.12.2002

Operator : _____ 3

Temperature : 23 °C
 Pressure : 993 hPa
 Rel. humidity: 55 %

Testport	Pulse	Level	Changes to ISO 7637
DC-Power line (12V)	1	II	t1=2.5 s; 10 pulses
DC-Power line (12V)	2	II	t1=2.5 s; 10 pulses
DC-Power line (12V)	3a	II	5 pulses, t=5 min
DC-Power line (12V)	3b	II	5 pulses, t=5 min
DC-Power line (12V)	4	II	5 pulses, $V_s=-5V$, $V_a=-2,5V$, $t_6=25ms$, $t_8=5s$, $t_f=5ms$
DC-Power line (12V)	7	II	5 pulses

Comment: For the tested device not required acc. EN 301 489-1.

The equipment meets the requirements	yes	no
	<input type="checkbox"/>	<input type="checkbox"/>

Registrationnumber : G0M20212-7419-E-16



Voltage dips and interruption

V - Dips

Standard : EN 301 489-1 subclause 9.7

Reg.-no. : G0M20212-7419-E-16

Device : C2D-SI 900/1800

Date : 12.12.2002

Operator : _____ *2*

Temperature	: 23 °C
Pressure	: 993 hPa
Rel. humidity	: 55 %

Reduction of supply voltage of	Voltage in % (in V)	Duration in ms
> 95 %	11 V	5000
60 %	40% (92 V)	100
30 %	70% (161 V)	10

Comment: For the tested device not required acc. EN 301 489-1.

The equipment meets the requirements	yes <input type="checkbox"/>	no <input type="checkbox"/>
--------------------------------------	---------------------------------	--------------------------------

Registrationnumber : G0M20212-7419-E-16

Surges common & different mode

Surges

Standard : EN 301 489-1 subclause 9.8

Reg.-no. : G0M20212-7419-E-16

Device : C2D-SI 900/1800

Date : 12.12.2002

Operator : _____

Temperature	: 23 °C
Pressure	: 993 hPa
Rel. humidity	: 55 %

Test mode	Voltage (kV)	Waveform T _r / T _h
AC- line to ground	1	1.2/50 μs
AC-line to line	0,5	1.2/50 μs
Signal line	0,5	1.2/50 μs

Comment: For the tested device not required acc. EN 301 489-1.

The equipment meets the requirements	yes	no
	<input type="checkbox"/>	<input type="checkbox"/>

Registrationnumber : G0M20212-7419-E-16

3 Normative references

- /1/ EN 301 489-7 V1.2.1: 2002
Specific conditions for mobile and portable radio and ancillary equipment of digital cellular radio telecommunications systems (GSM and DCS)
- /2/ EN 55022 : 1998
„Limits and methods of measurement of radio interference characteristics of information technology equipment“.
- /3/ EN 61000-4-3 : 1999
„Electromagnetic Compatibility - Basic immunity standard - Radiated, radio-frequency electromagnetic field. Immunity test“.
- /4/ EN 61000 - 4 - 2 : 1996
„Electromagnetic Compatibility (EMC); Part 4: Testing and measurements techniques - Section 2: Electrostatic discharge immunity test. Basic EMC publication“.
- /5/ EN 61000 - 4 - 4 : 1996
„Electromagnetic Compatibility (EMC); Part 4: Testing and measurements techniques - Section 4: Electrical fast transient/burst immunity test. Basic EMC publication“.
- /6/ EN 61000 - 4 - 6 : 1997
„Electromagnetic Compatibility - Basic immunity standard - Conducted disturbances induced by radio-frequency fields. Immunity test.
- /7/ ISO 7637-2 : 1990
„Road vehicles - Electrical disturbance by conducting and coupling - Part 2: Commercial vehicles with nominal 24 V supply voltage - Electrical transient conduction along supply lines only“.
- /8/ ISO 7637-1 : 1990
„Road vehicles - Electrical disturbance by conducting and coupling - Part 1: Passenger cars and light commercial vehicles with nominal 12 V supply voltage - Electrical transient conduction along supply lines only“.



- /9/ EN 61000 - 4 - 11 : 1995
„Electromagnetic Compatibility (EMC); Part 4: Testing and measurements techniques - Section 11: Voltage dips, short interruptions and voltage variations immunity tests - Basic EMC publication“.
- /10/ EN 61000 - 4 -5 : 1996
„Electromagnetic Compatibility - Basic immunity standard. Surge immunity Test“.
- /11/ EN 61000 - 3 -2 : 1998
„Disturbances in supply systems caused by household appliances and similar electrical equipment Part 2: Harmonics“
- /12/ EN 61000 - 3 -3: 1996
„Disturbances in supply systems caused by household appliances and similar electrical equipment Part 3: Voltage fluctuations“
- /13/ EN 301 489 – 1 V1.4.1 : 2002
Electromagnetic compatibility and Radio spectrum Matters (ERM);
ElectroMagnetic Compatibility (EMC) standart for radio equipment and services;
Part 1: Common technical requierments

Appendix



A. Pictures




REGISTRATIONNUMBER: GOM20212-7419-E-16

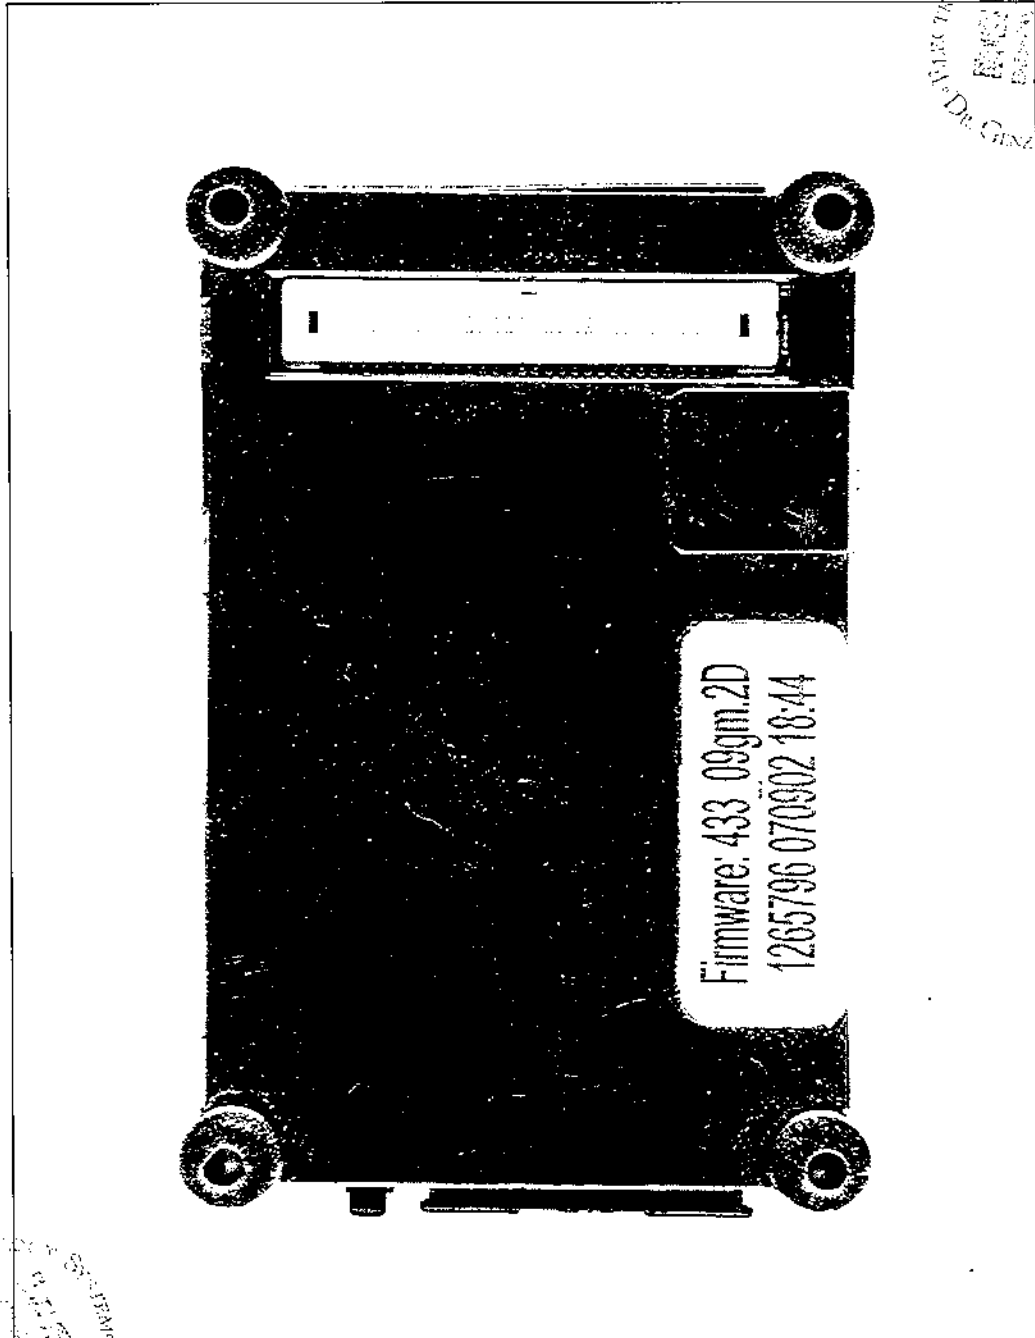


REGISTRATIONNUMBER: G0M20212-7419-E-16

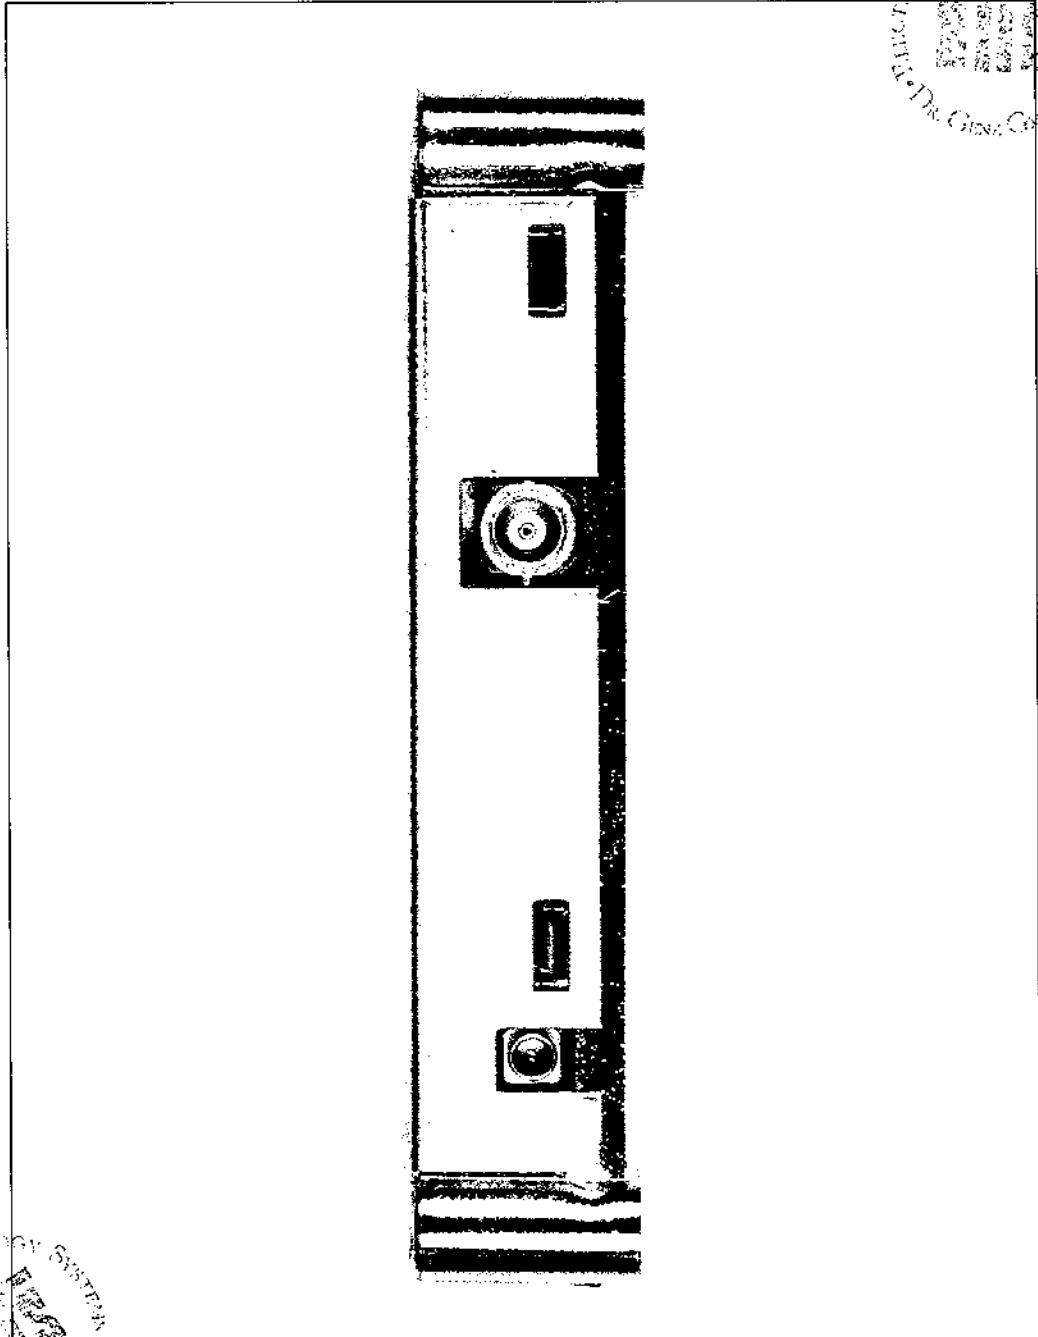


REGISTRATIONNUMBER: G0M20212-7419-E-16

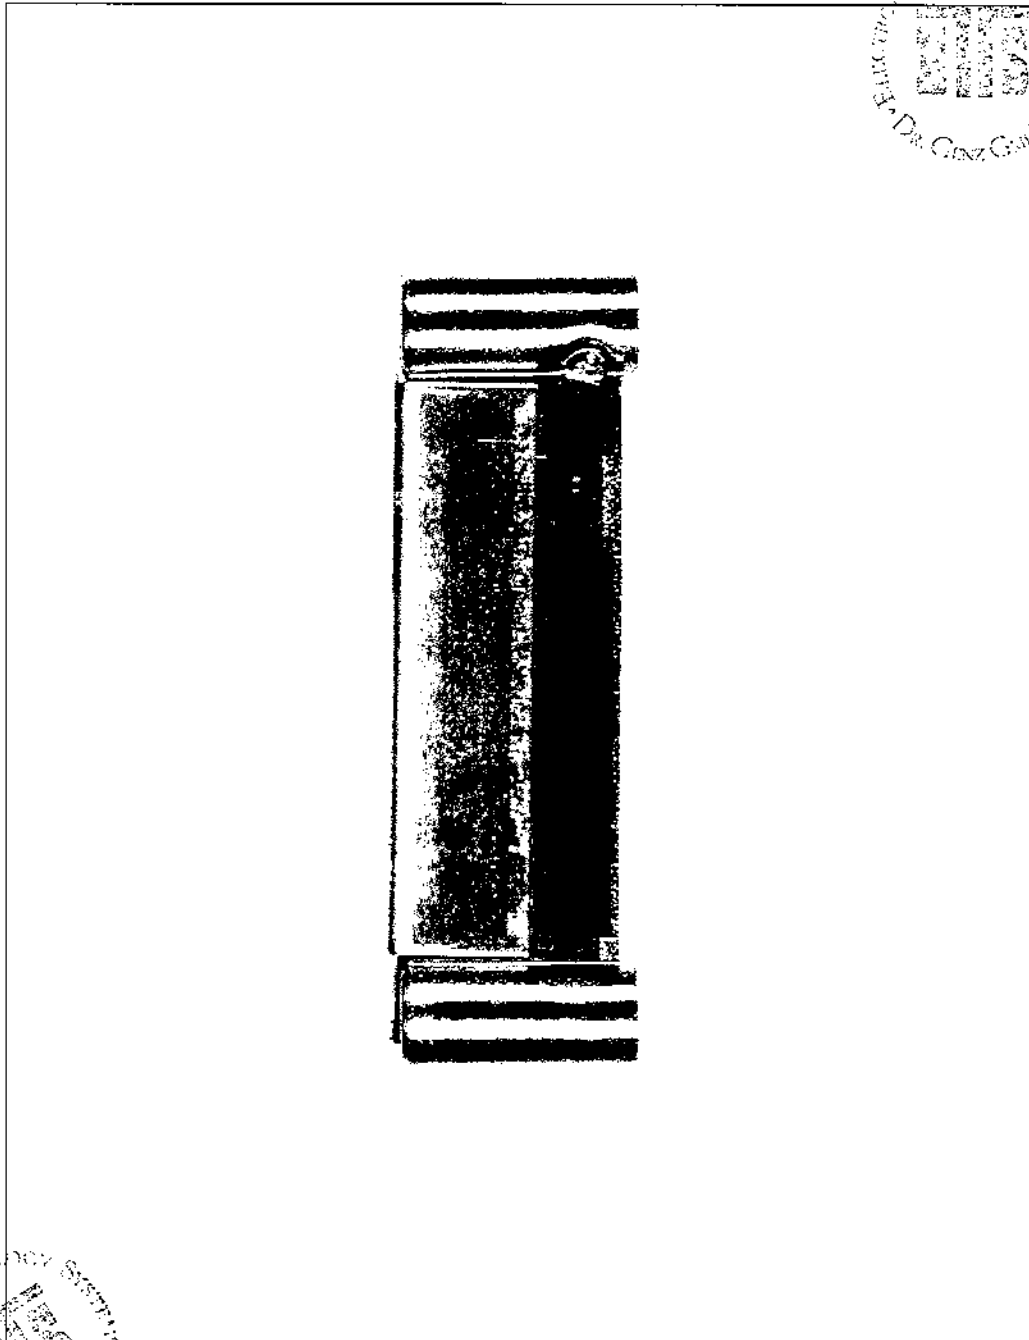

REGISTRATIONNUMBER: G0M20212-7419-E-16

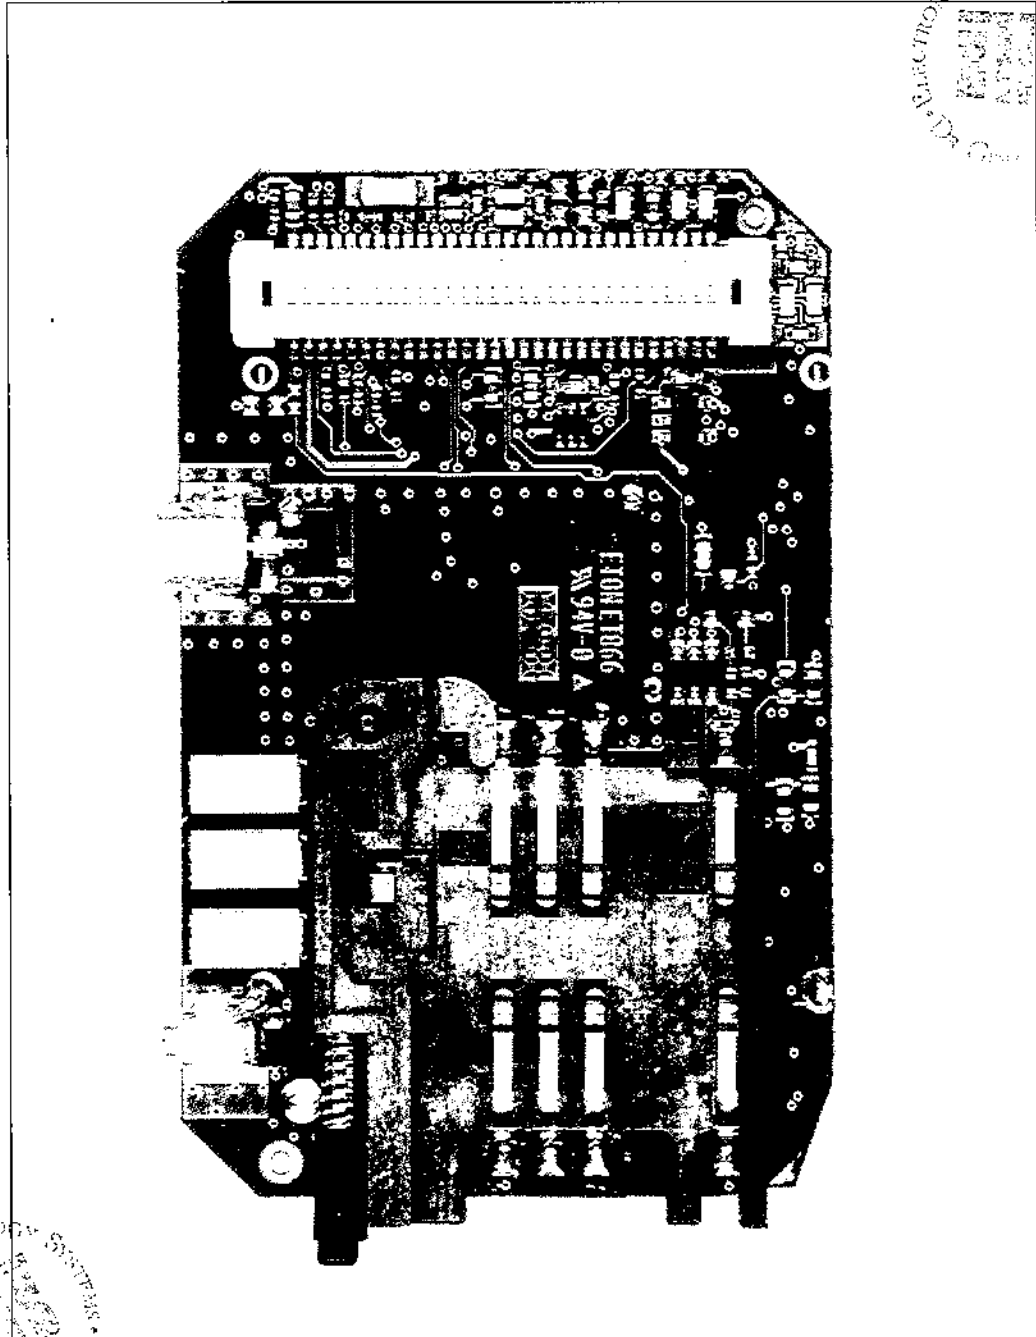

REGISTRATIONNUMBER: G0M20212-7419-E-16

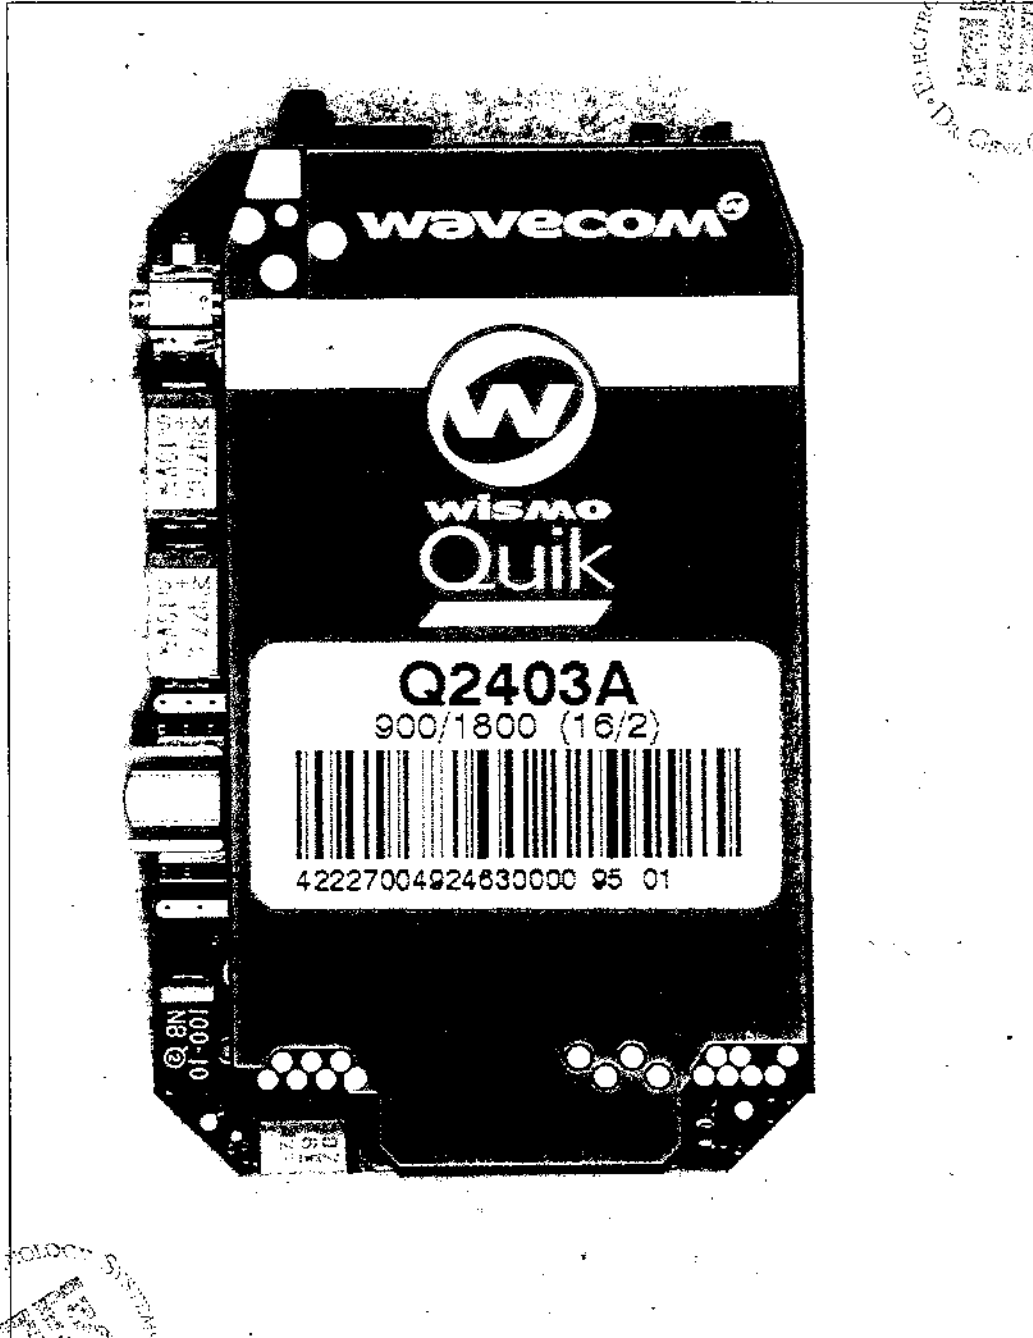


REGISTRATIONNUMBER: G0M20212-7419-E-16

**Radiated spurious emissions-MS allocated ARFCN 62
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:98.833MHz Pmax:-67.04 RBW:10/100KHz

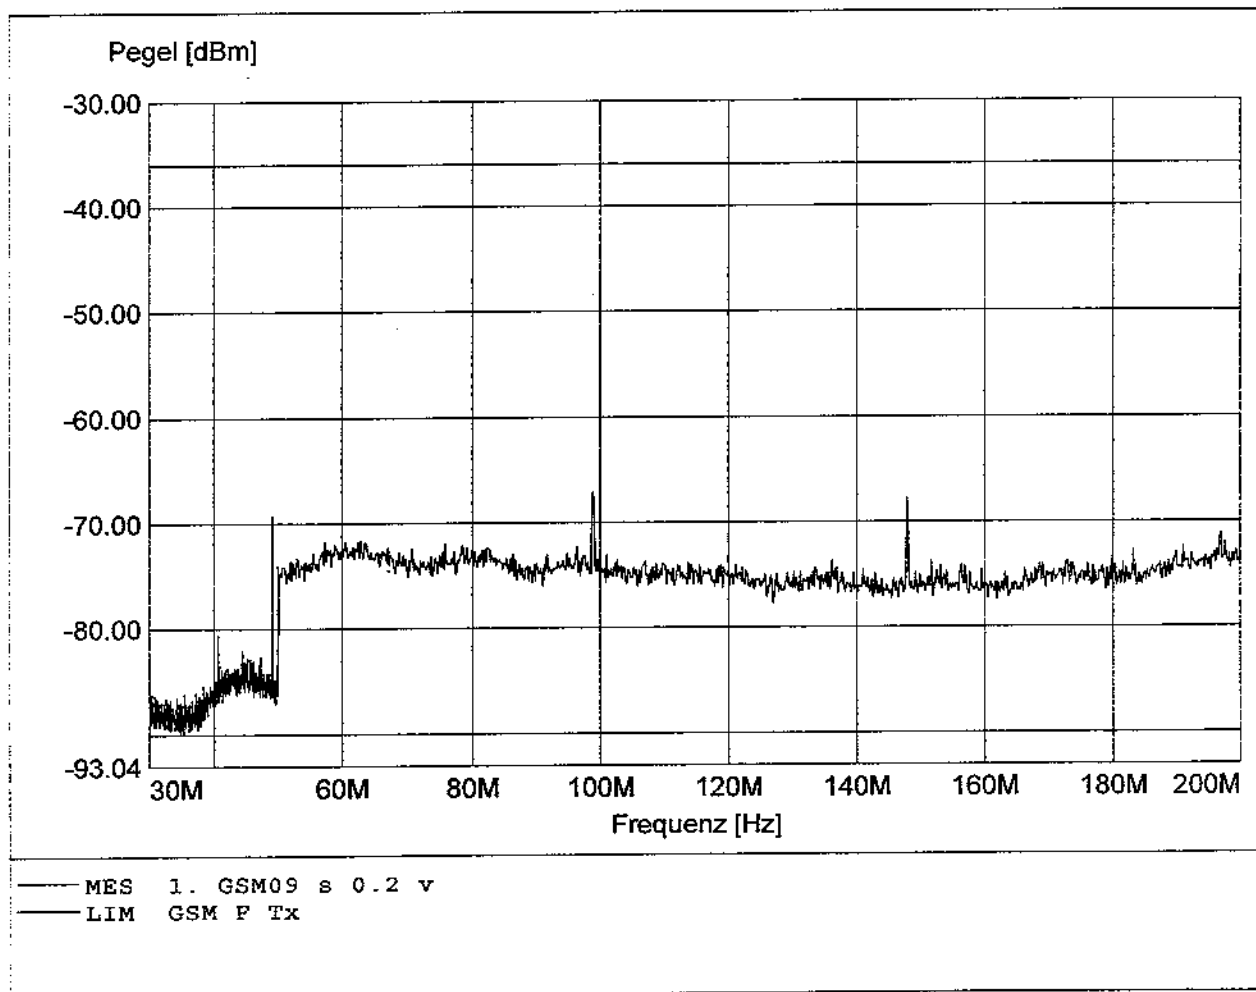

**Radiated spurious emissions-MS allocated ARFCN 62
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:98.833MHz Pmax:-68.50 RBW:10/100KHz

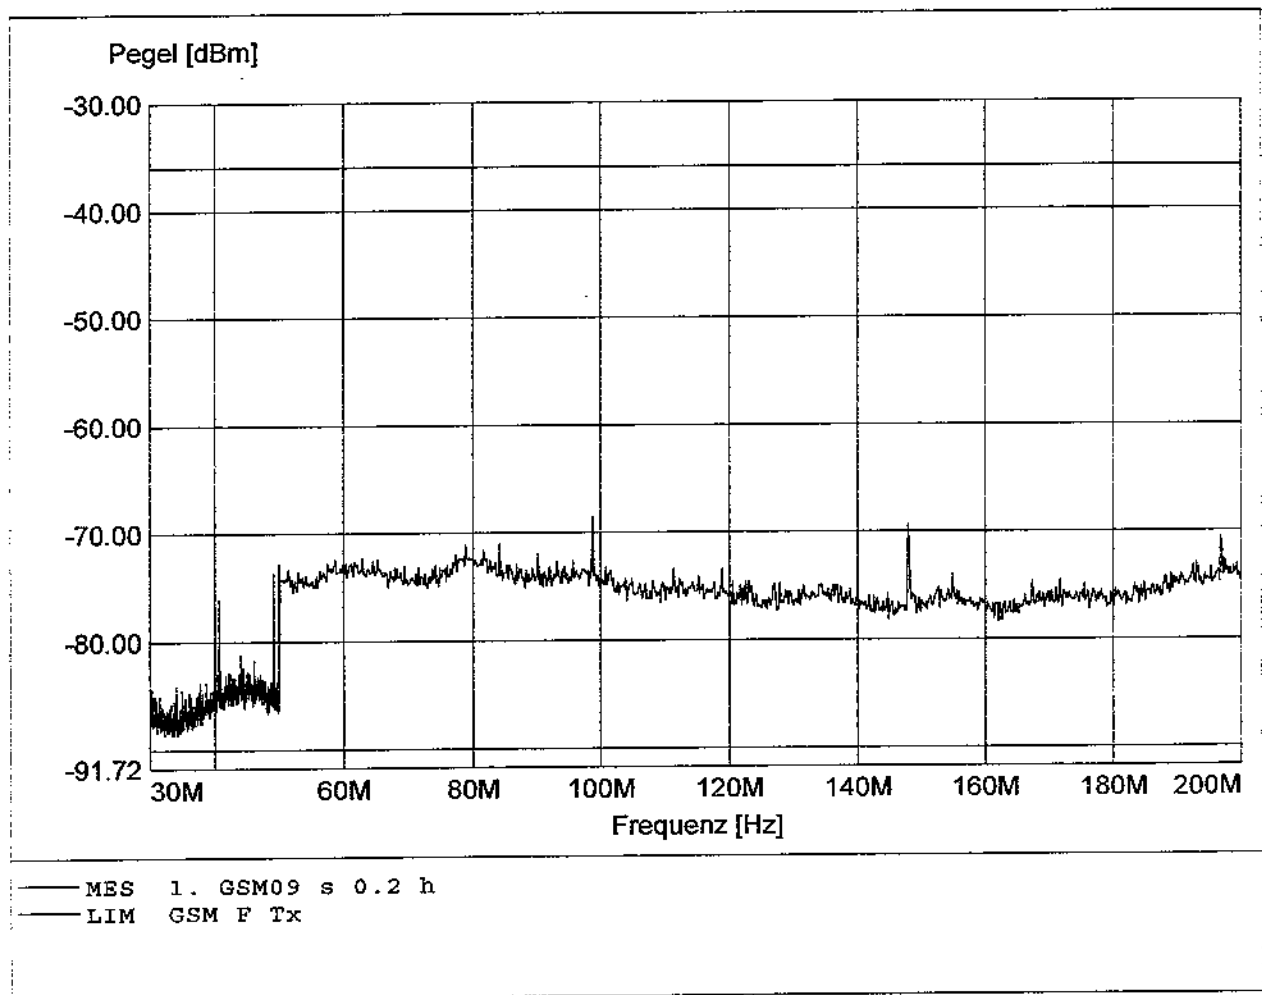

**Radiated spurious emissions-MS allocated ARFCN 62
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 223, Ampl.:0.2-1GHz,notch-f.
Comment 2: Freq:724.778MHz Pmax:-60.96 RBW:0.1/3MHz

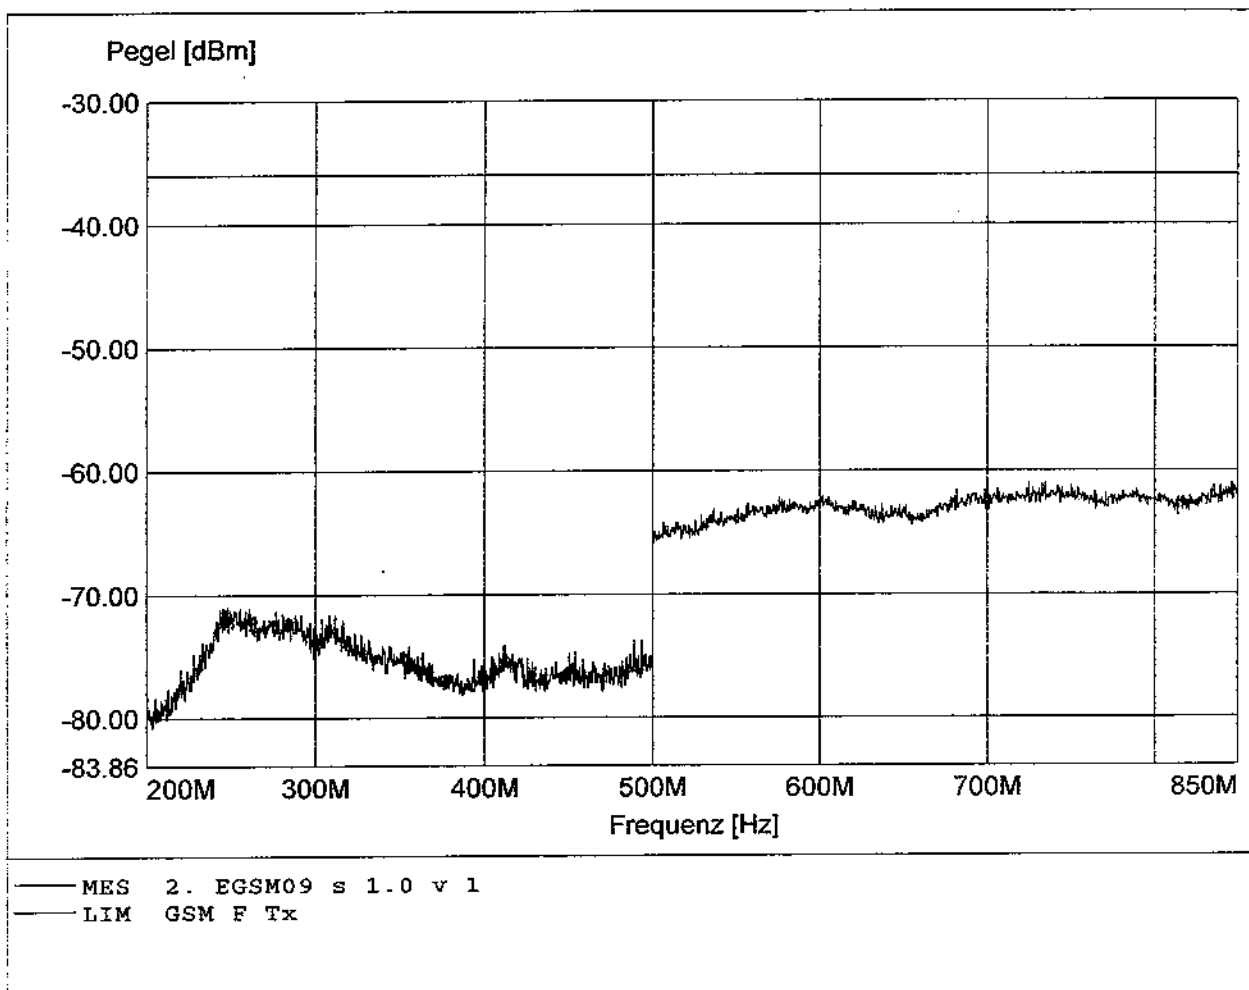

**Radiated spurious emissions-MS allocated ARFCN 62
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 223, Ampl.:0.2-1GHz,notch-f.
Comment 2: Freq:646.611MHz Pmax:-56.46 RBW:0.1/3MHz

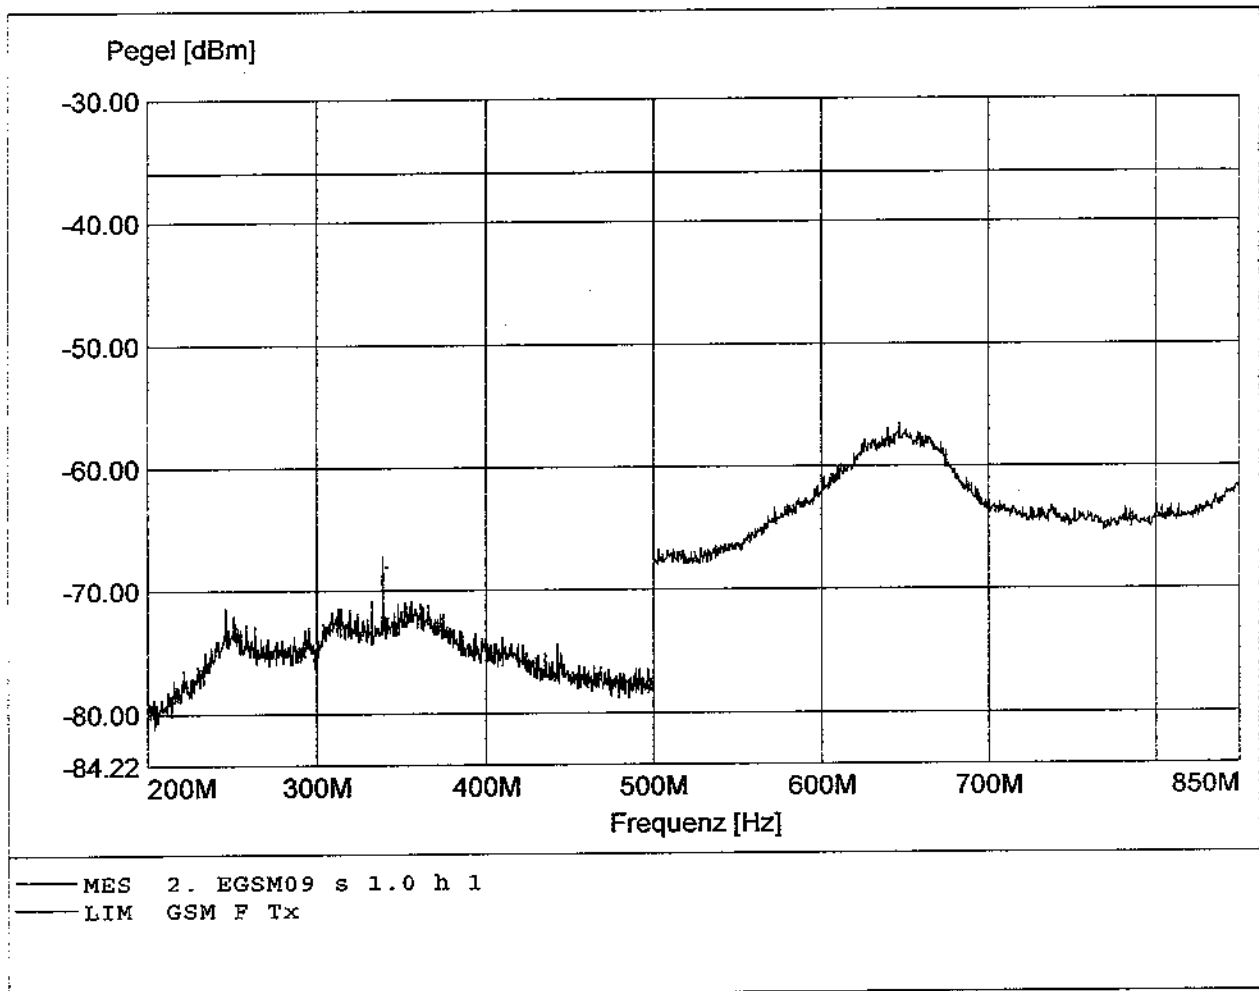

**Radiated spurious emissions-MS allocated ARFCN 62
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 223, Ampl.:0.2-1GHz,notch-f.
Comment 2: Freq:853.356MHz Pmax:-59.65 RBW:1MHz to 30KHz

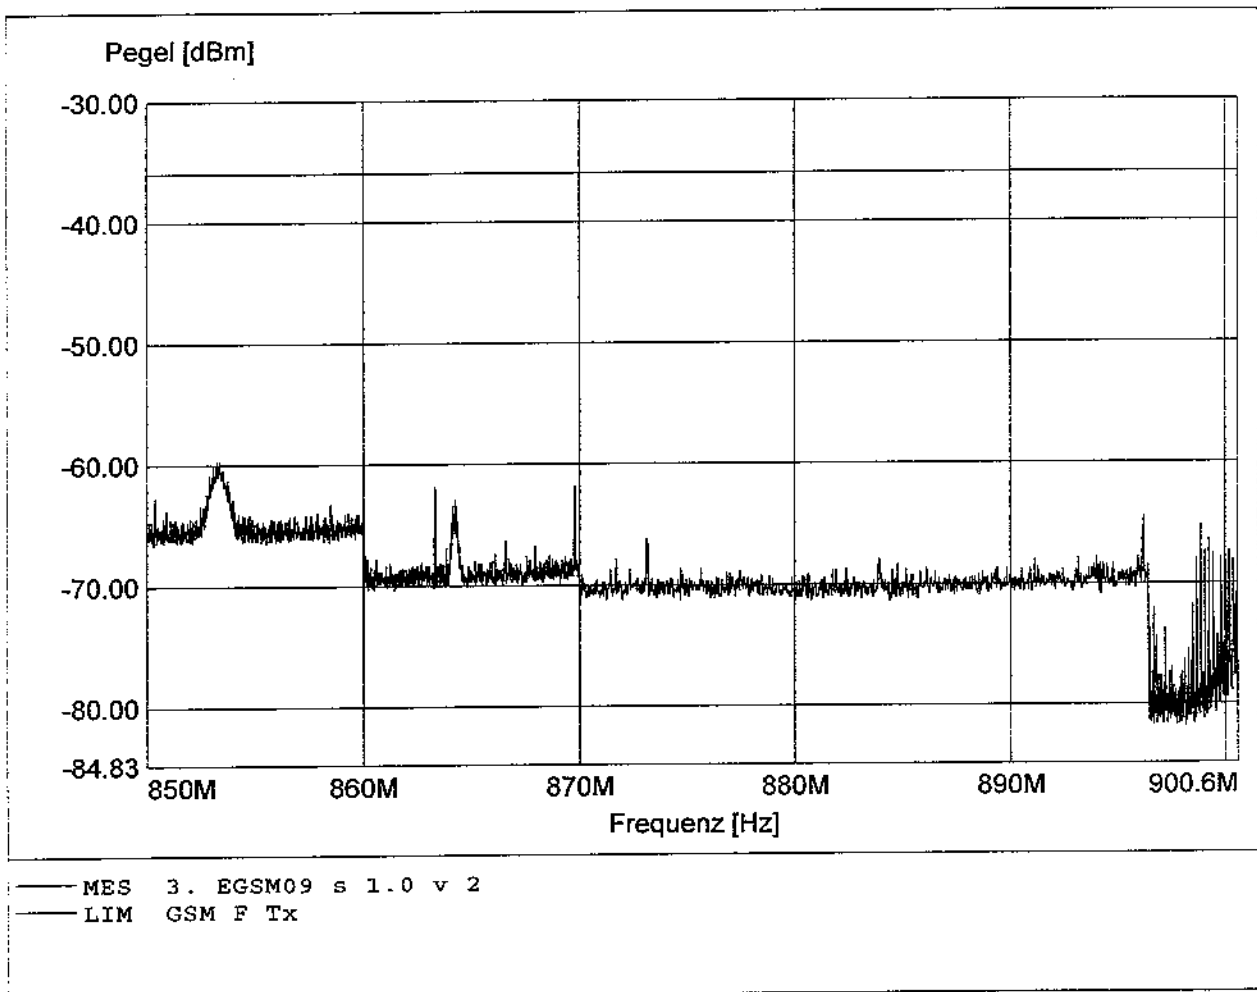

**Radiated spurious emissions-MS allocated ARFCN 62
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 223, Ampl.:0.2-1GHz,notch-f.
Comment 2: Freq:853-178MHz Pmax:-61.60 RBW:1MHz to 30KHz

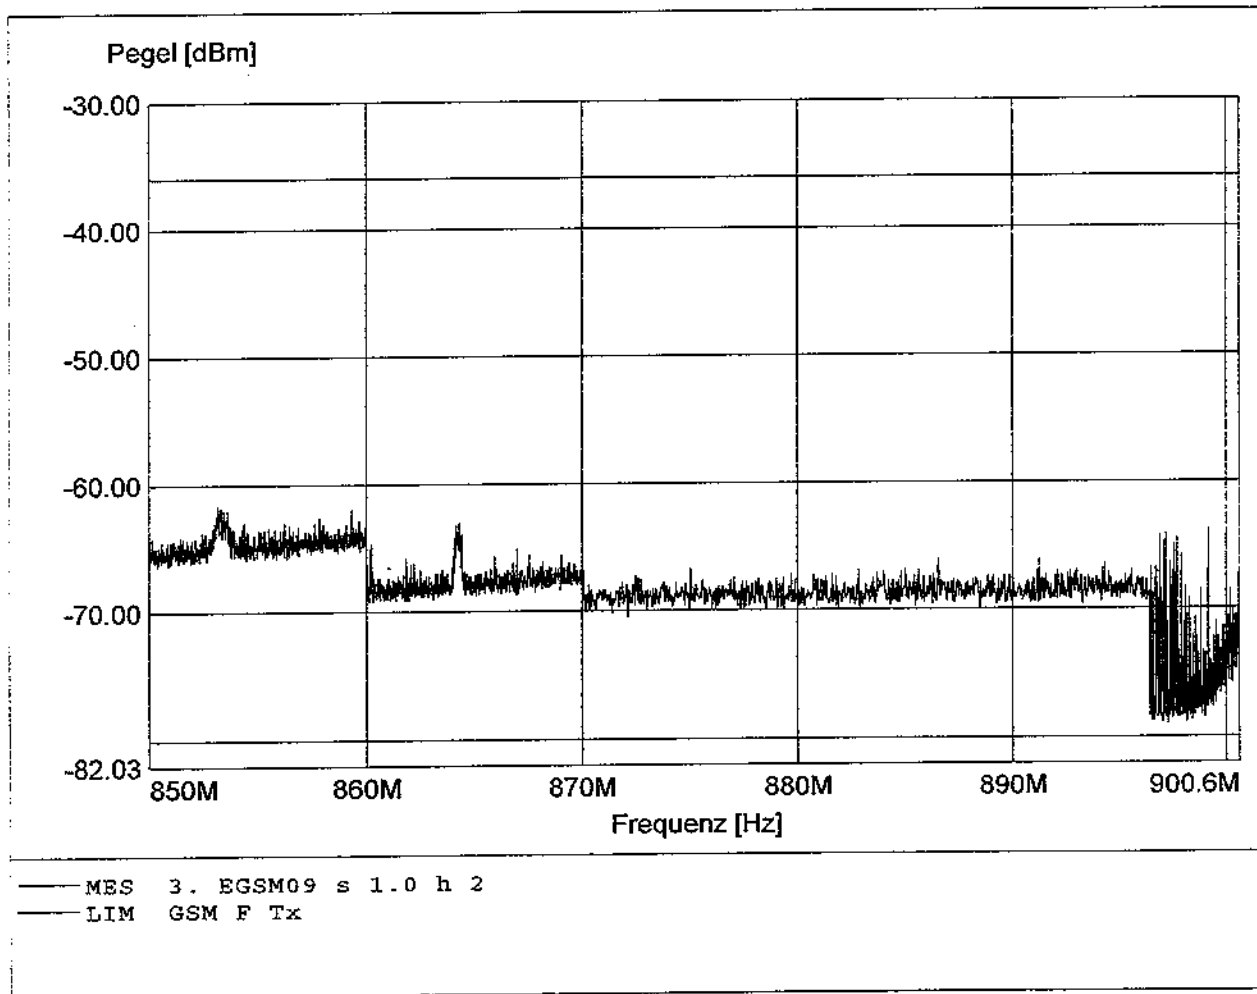

**Radiated spurious emissions-MS allocated ARFCN 62
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 223, Ampl.:0.2-1GHz,notch-f.
Comment 2: Freq:908.400MHz Pmax:-56.46 RBW:30KHz to 1MHz

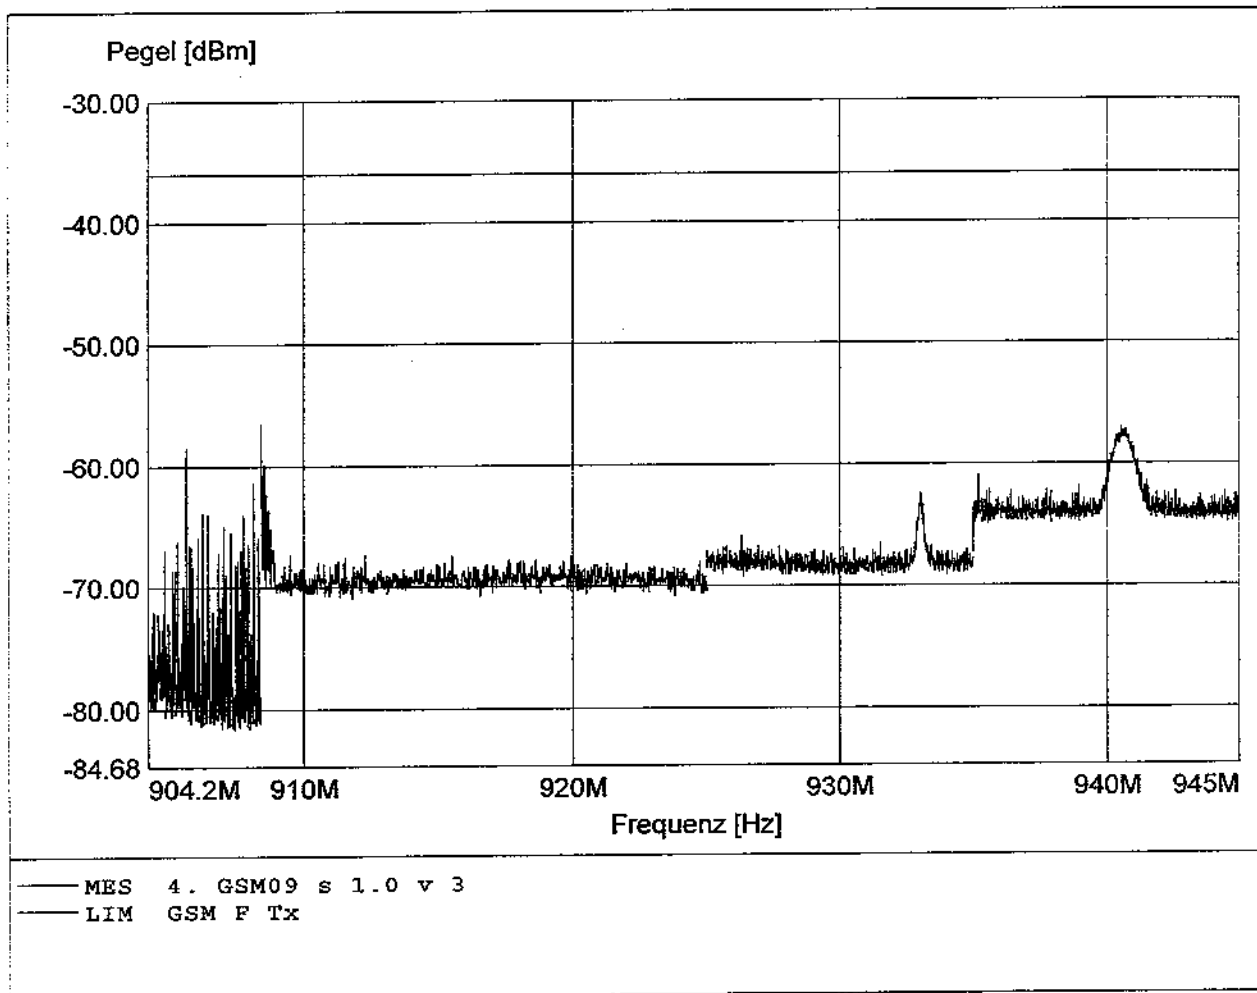

**Radiated spurious emissions-MS allocated ARFCN 62
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 223, Ampl.:0.2-1GHz,notch-f.
Comment 2: Freq:940.511MHz Pmax:-57.23 RBW:30KHz to 1MHz

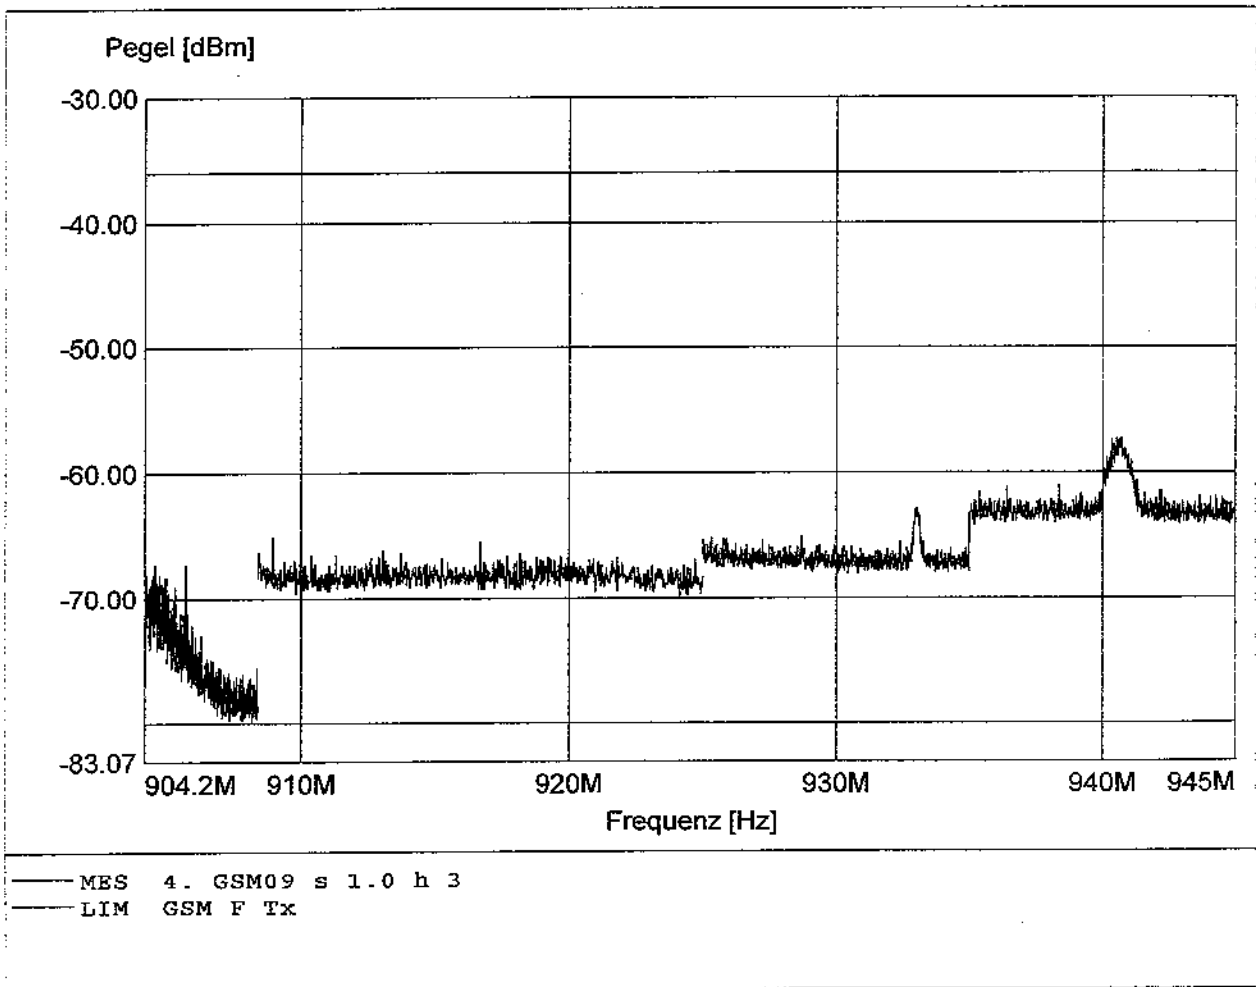

**Radiated spurious emissions-MS allocated ARFCN 62
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 223, Ampl.:0.2-1GHz, notch-f.
Comment 2: Freq:952.333MHz Pmax:-54.14 RBW:3MHz

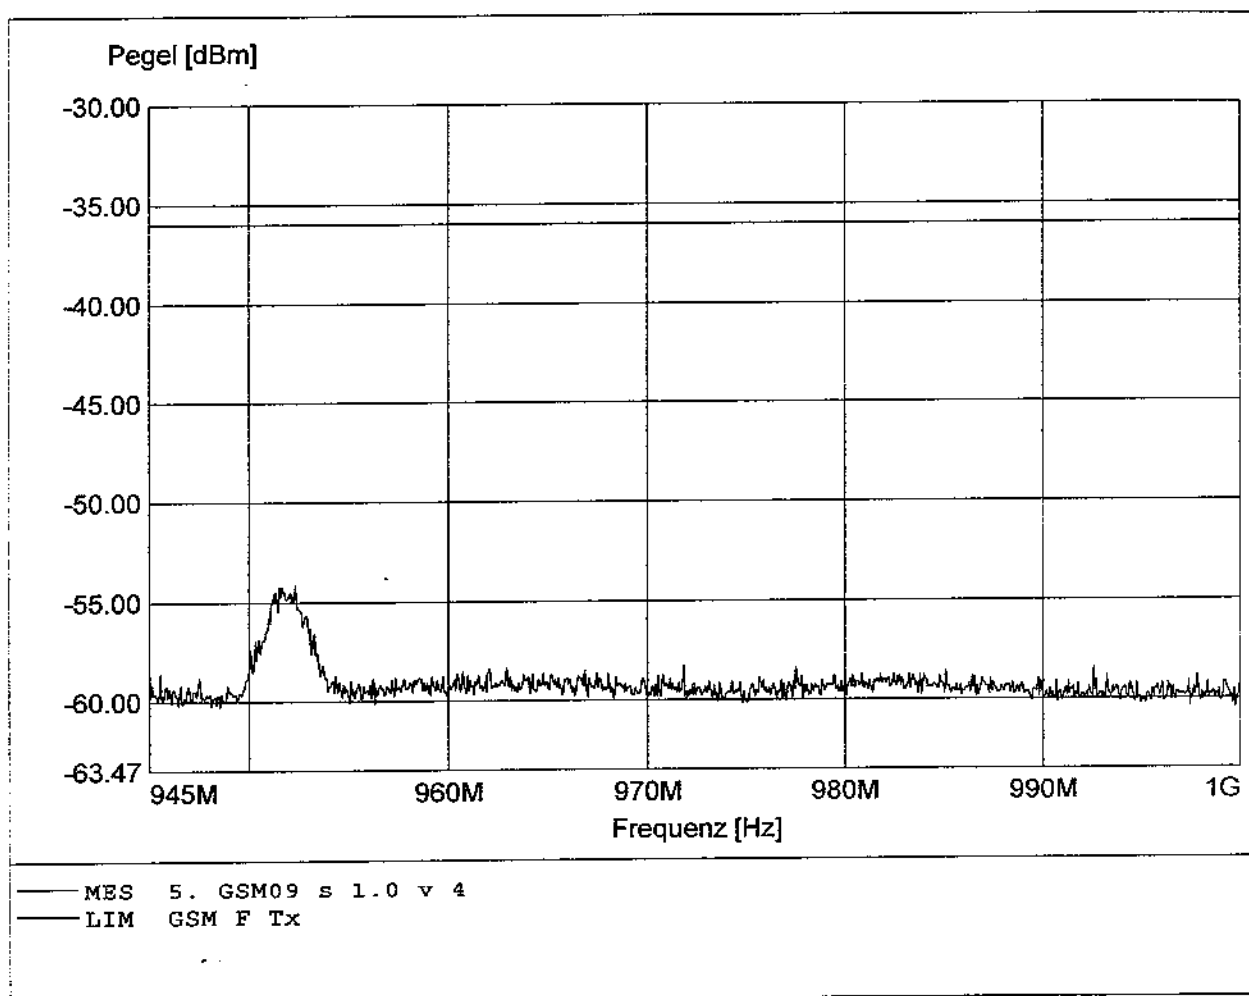

**Radiated spurious emissions-MS allocated ARFCN 62
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH

Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 223, Ampl.:0.2-1GHz,notch-f.
Comment 2: Freq:951.967MHz Pmax:-52.98 RBW:3MHz

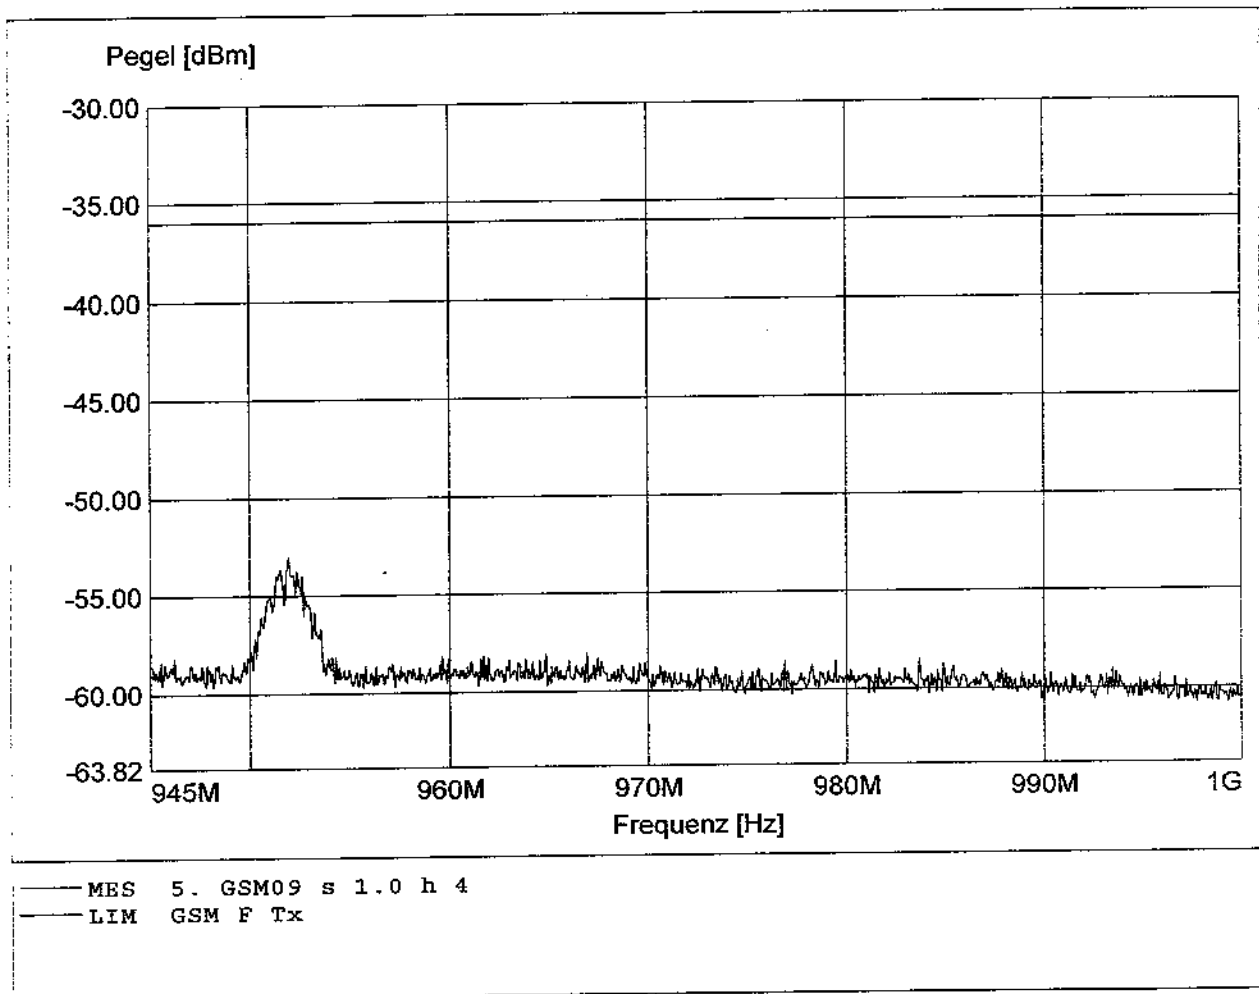

**Radiated spurious emissions-MS allocated ARFCN 62
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800

Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC

Test Site / Operator: ETS / Mr. F.Schulz

Test Specification: GSM 11.10-1 testcase 12.2.1

Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.:1-4GHz, High Pass


Comment 2: Freq:1.810GHz Pmax:-37.38 RBW:3MHz

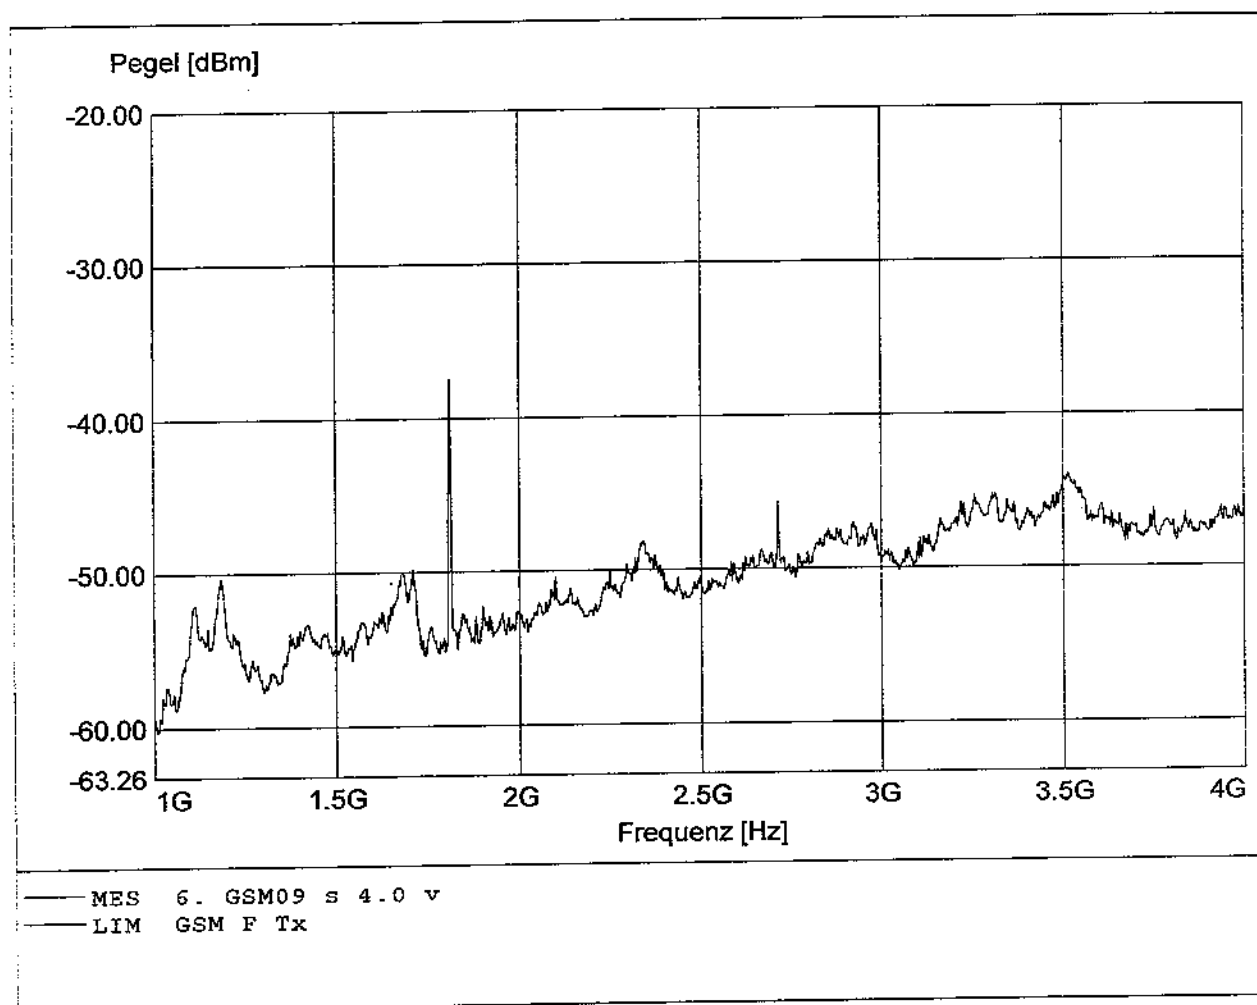

**Radiated spurious emissions-MS allocated ARFCN 62
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.:1-4GHz, High Pass
Comment 2: Freq:1.810GHz Pmax:-32.17 RBW:3MHz

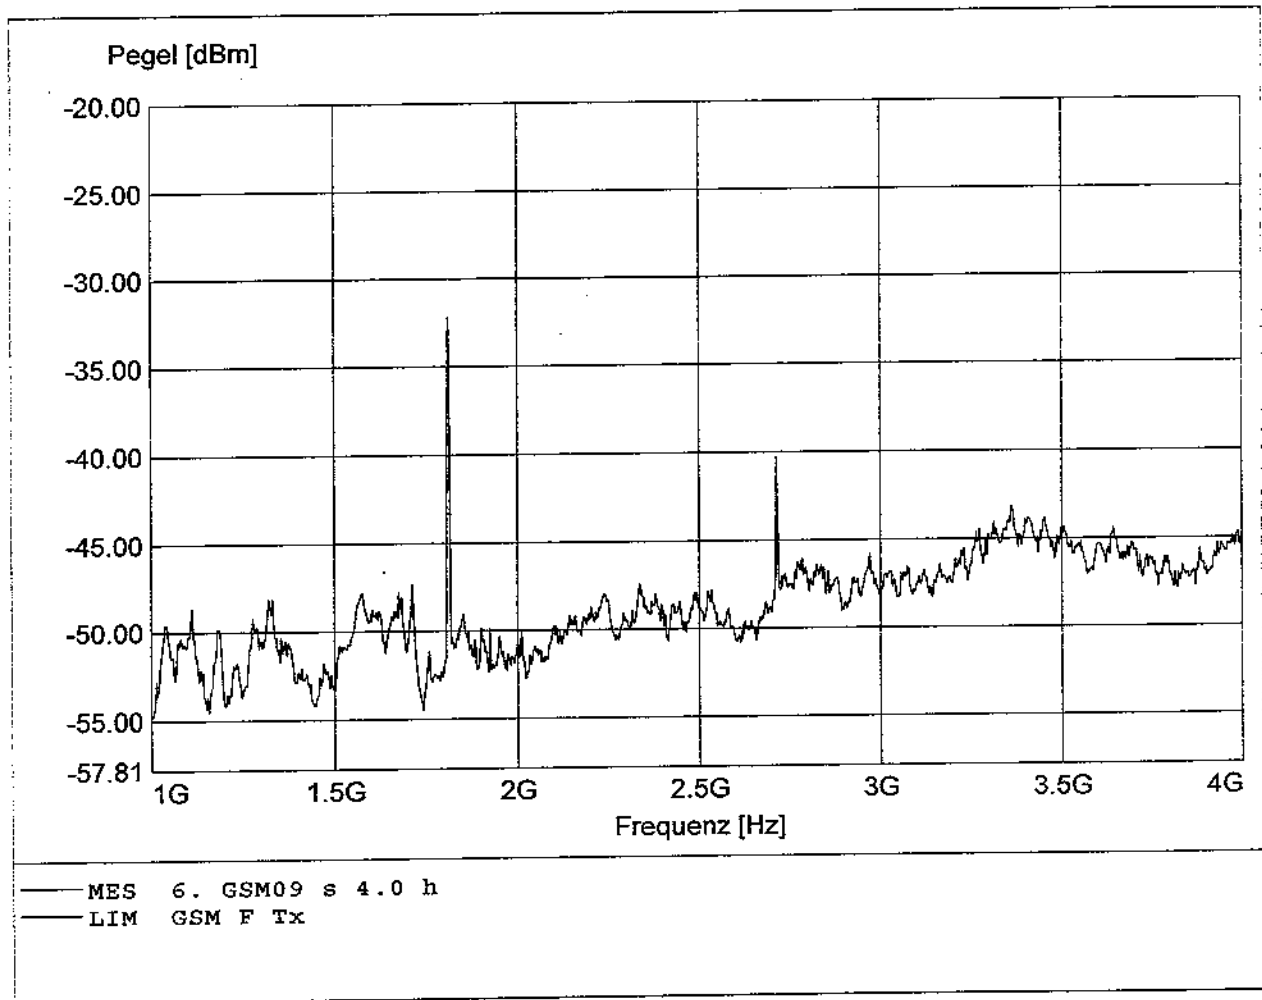

2.Harmonic-MS allocated channel 62
EGSM 900 (Fully anechoic chamber)

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.:1-4GHz, High Pass
Comment 2: Freq:1.805GHz Pmax:-35.76 RBW:3MHz

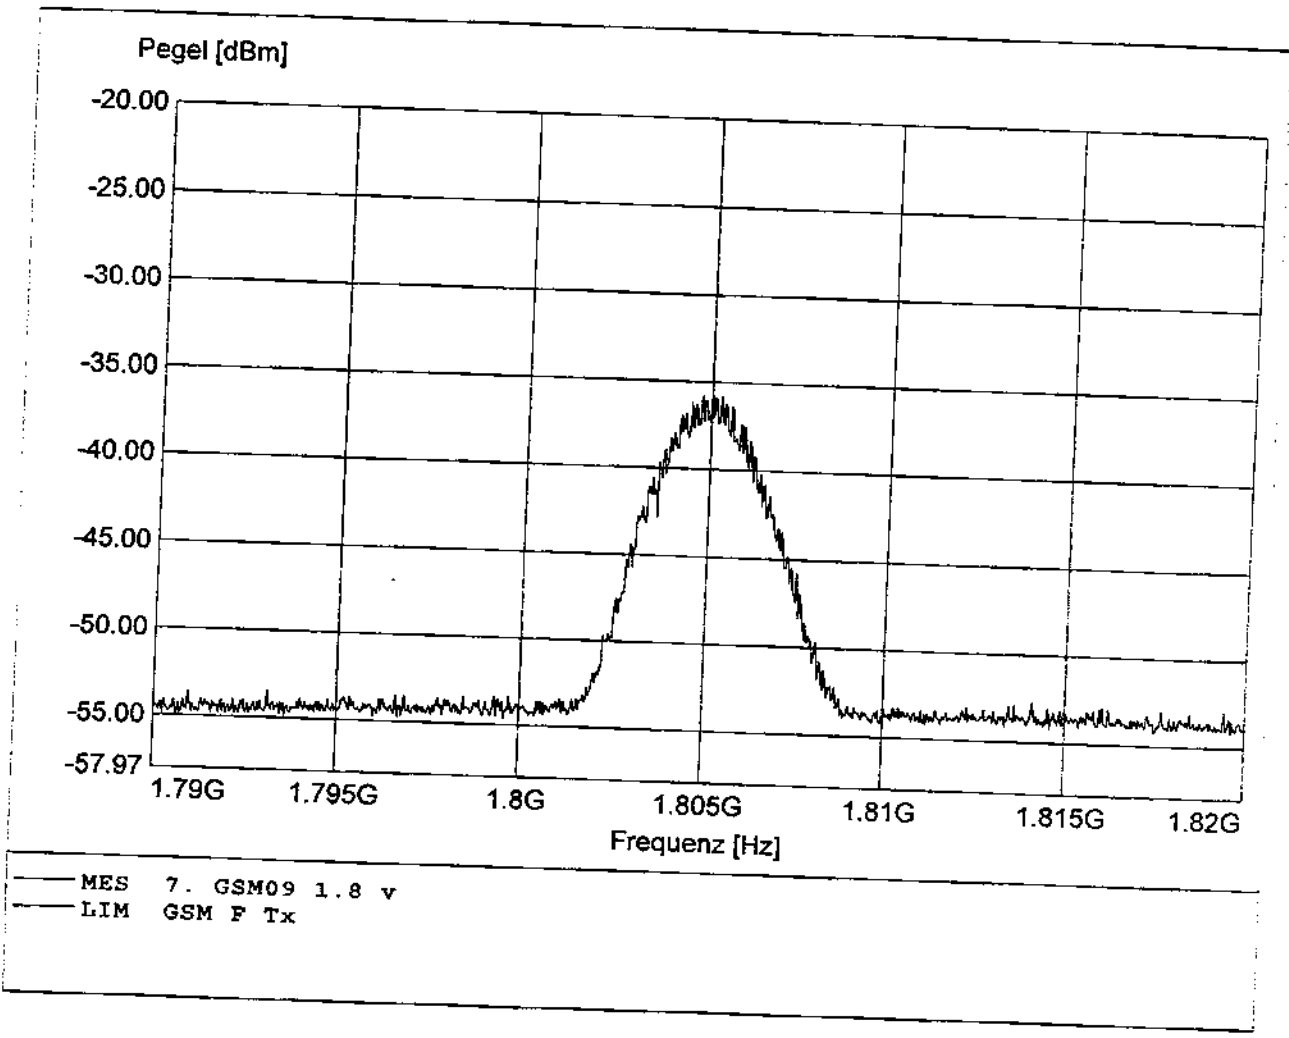

**2.Harmonic-MS allocated channel 62
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.:1-4GHz, High Pass
Comment 2: Freq:1.805GHz Pmax:-32.52 RBW:3MHz

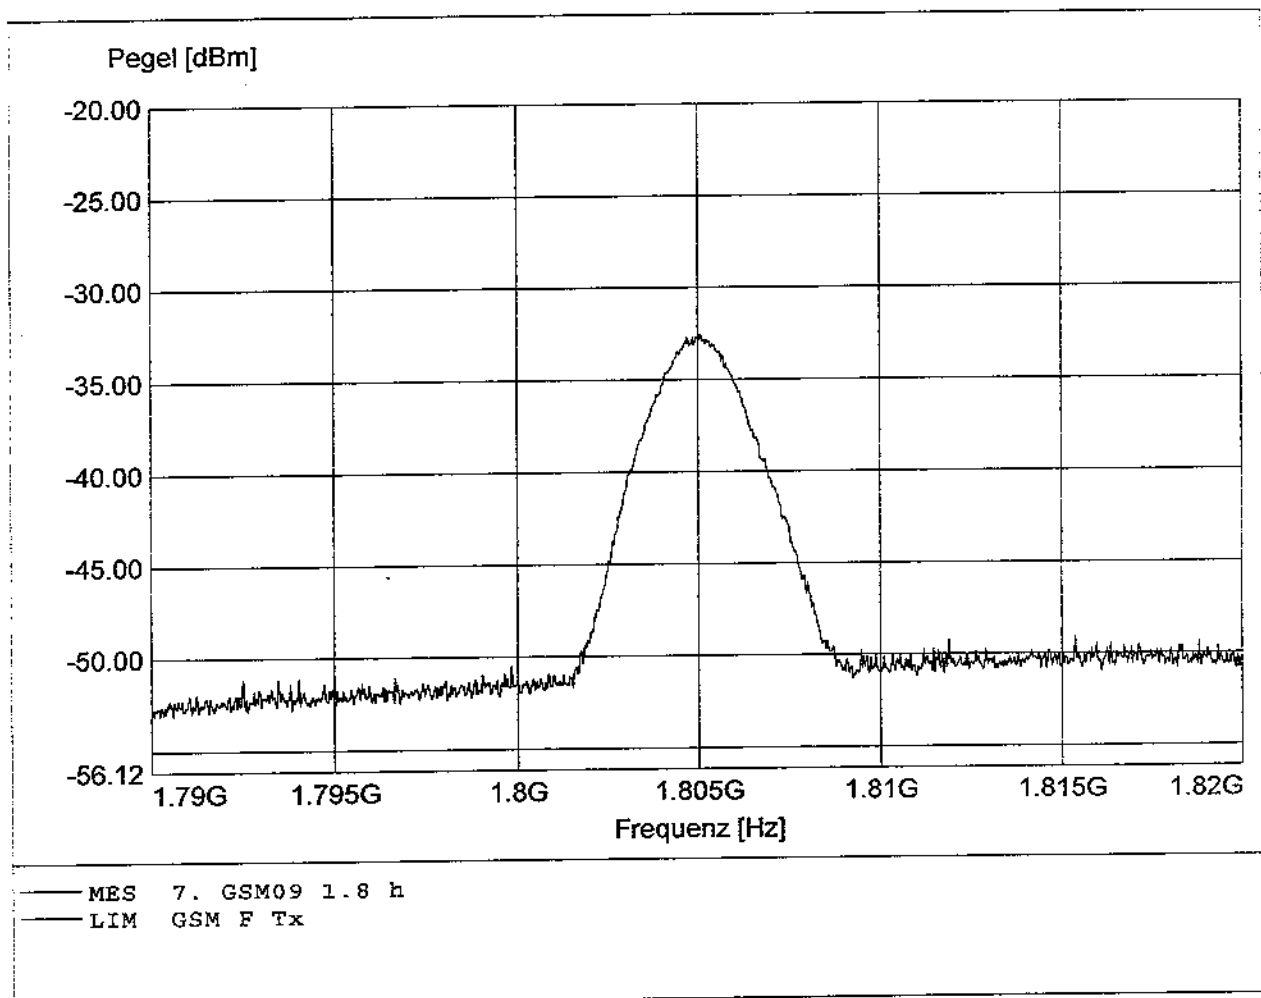

**3. Harmonic-MS allocated channel 62
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.:1-4GHz, High Pass
Comment 2: Freq:2.707GHz Pmax:-44.36 RBW:3MHz

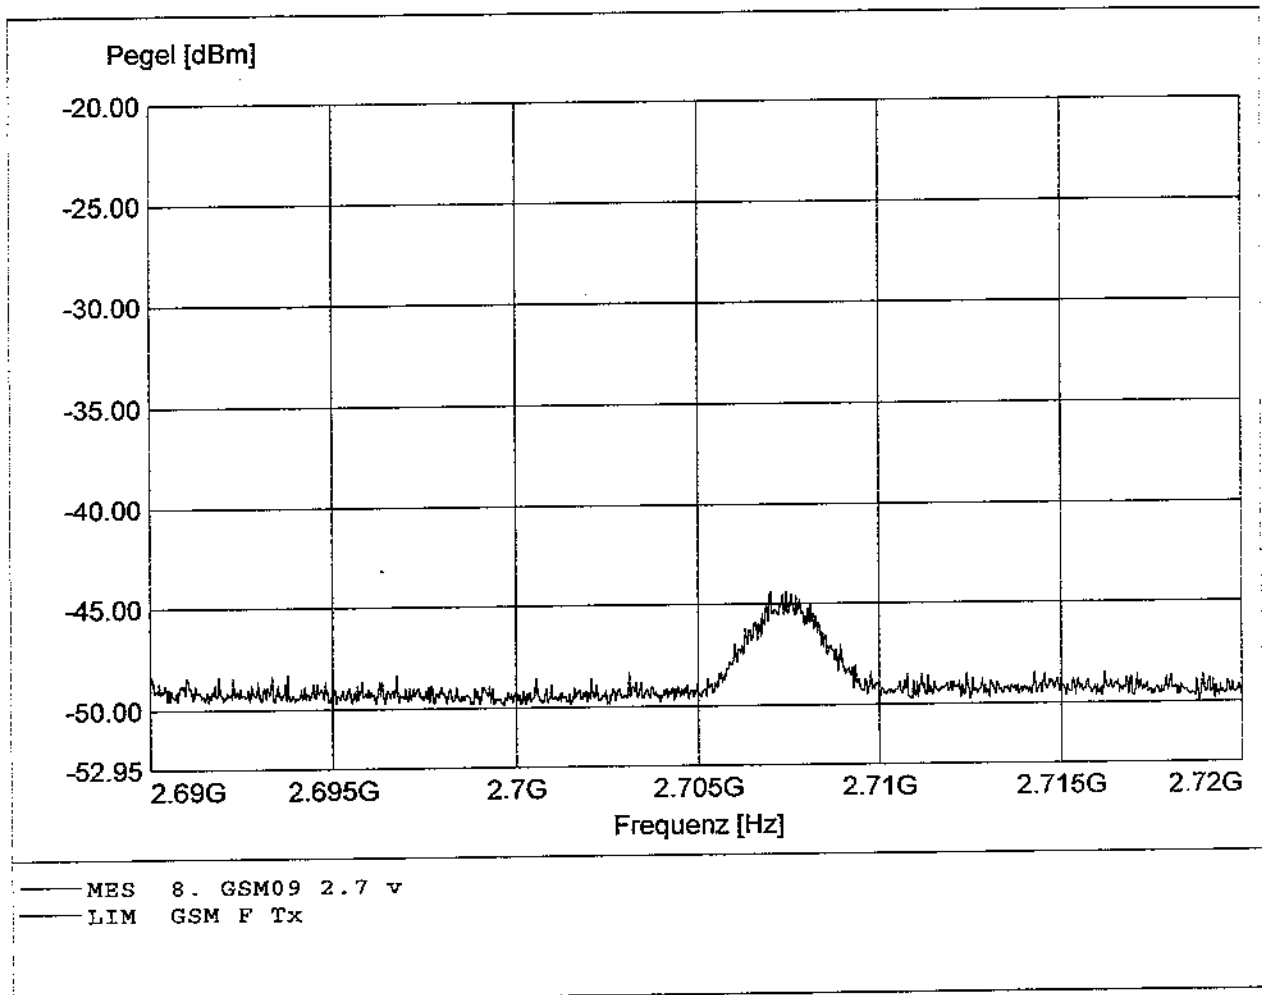

**3.Harmonic-MS allocated channel 62
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.:1-4GHz, High Pass
Comment 2: Freq:2.707GHz Pmax:-39.06 RBW:3MHz

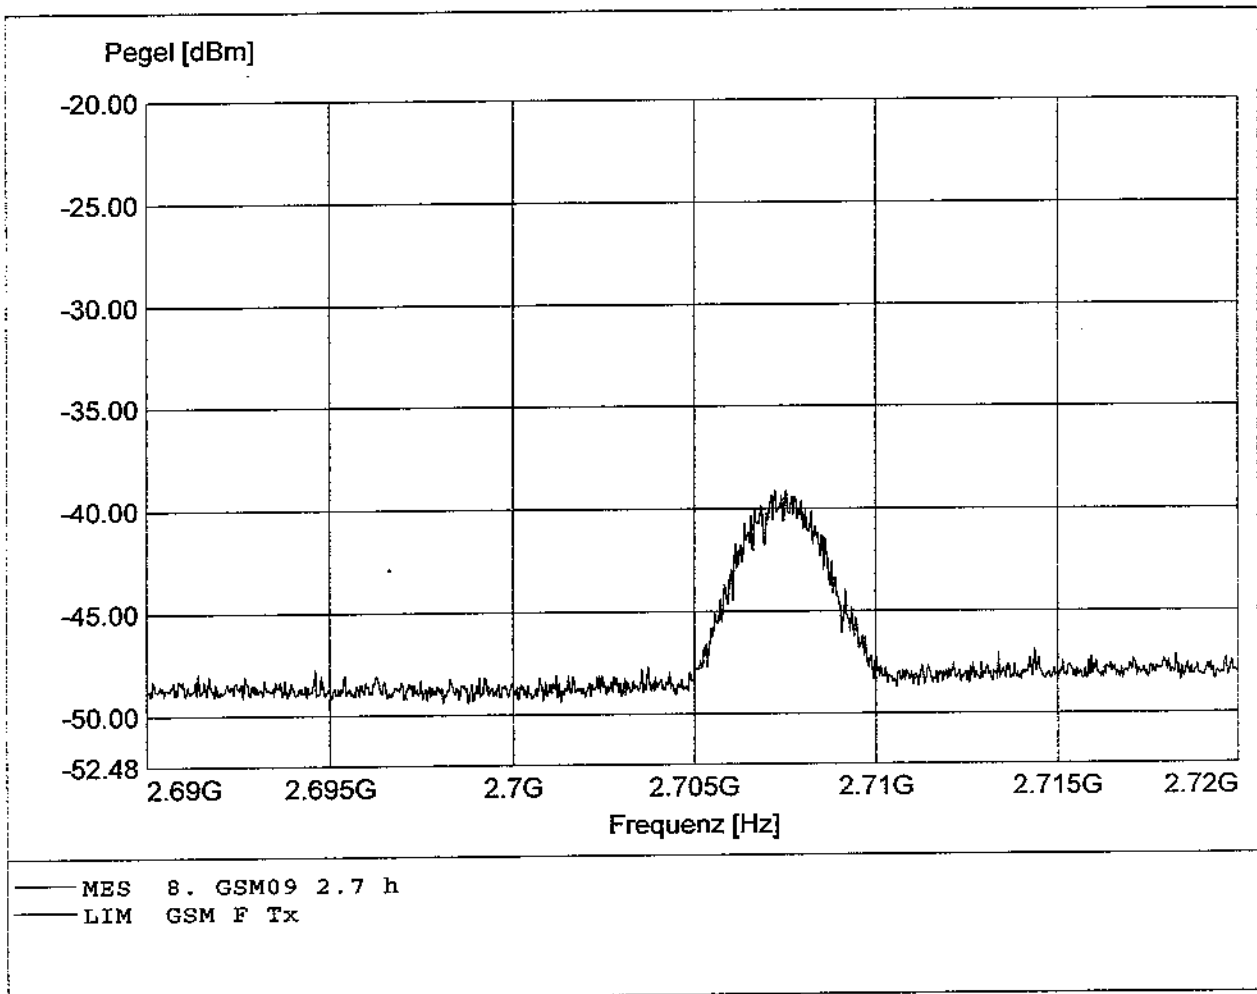

**4. Harmonic-MS allocated channel 62
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.:1-4GHz, High Pass
Comment 2: Freq:3.590GHz Pmax:-44.91 RBW:3MHz

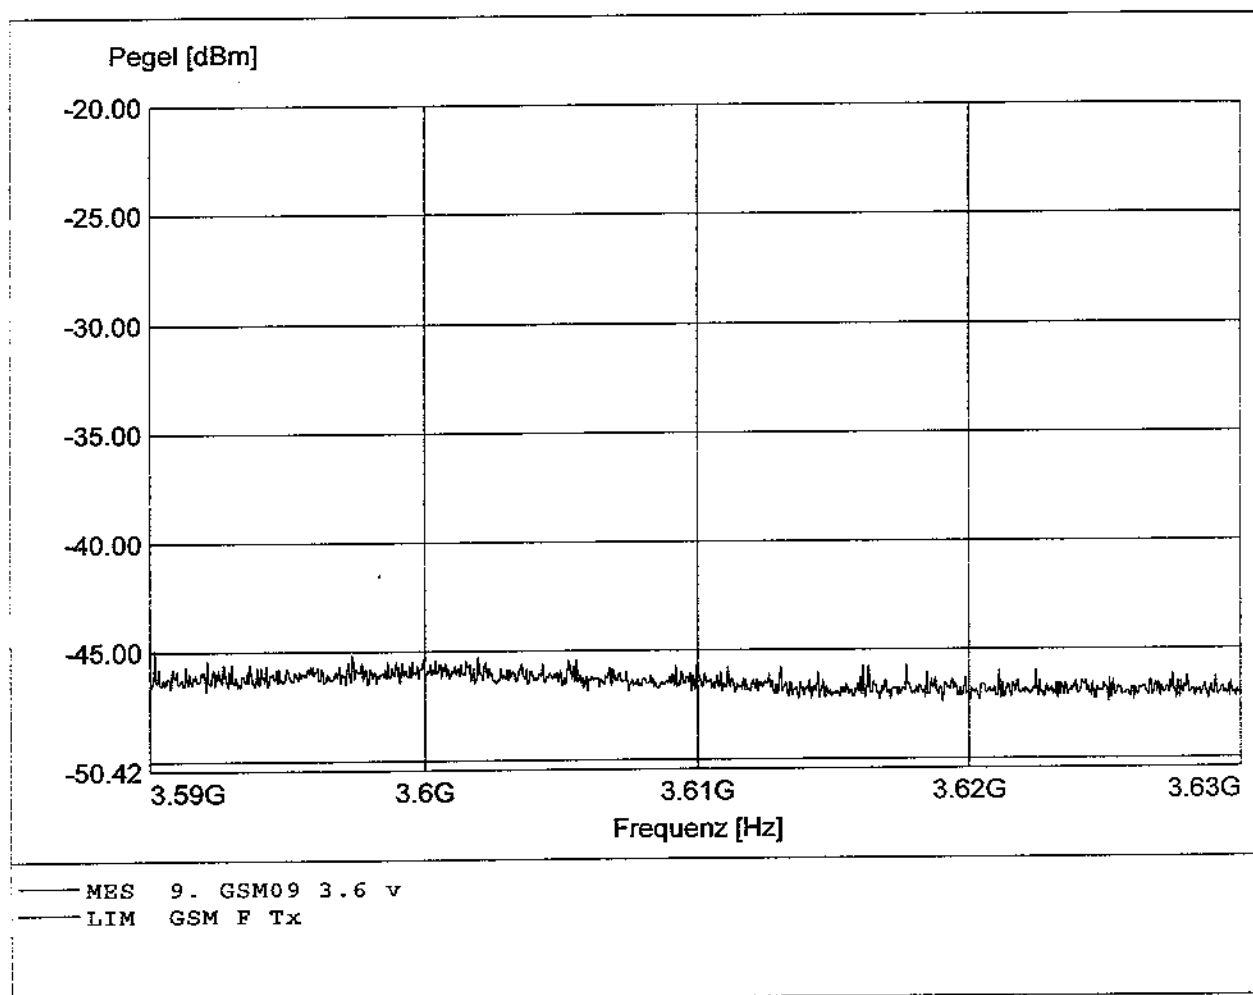

4. Harmonic-MS allocated channel 62
EGSM 900 (Fully anechoic chamber)

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.:1-4GHz, High Pass
Comment 2: Freq:3.604GHz Pmax:-44.24 RBW:3MHz

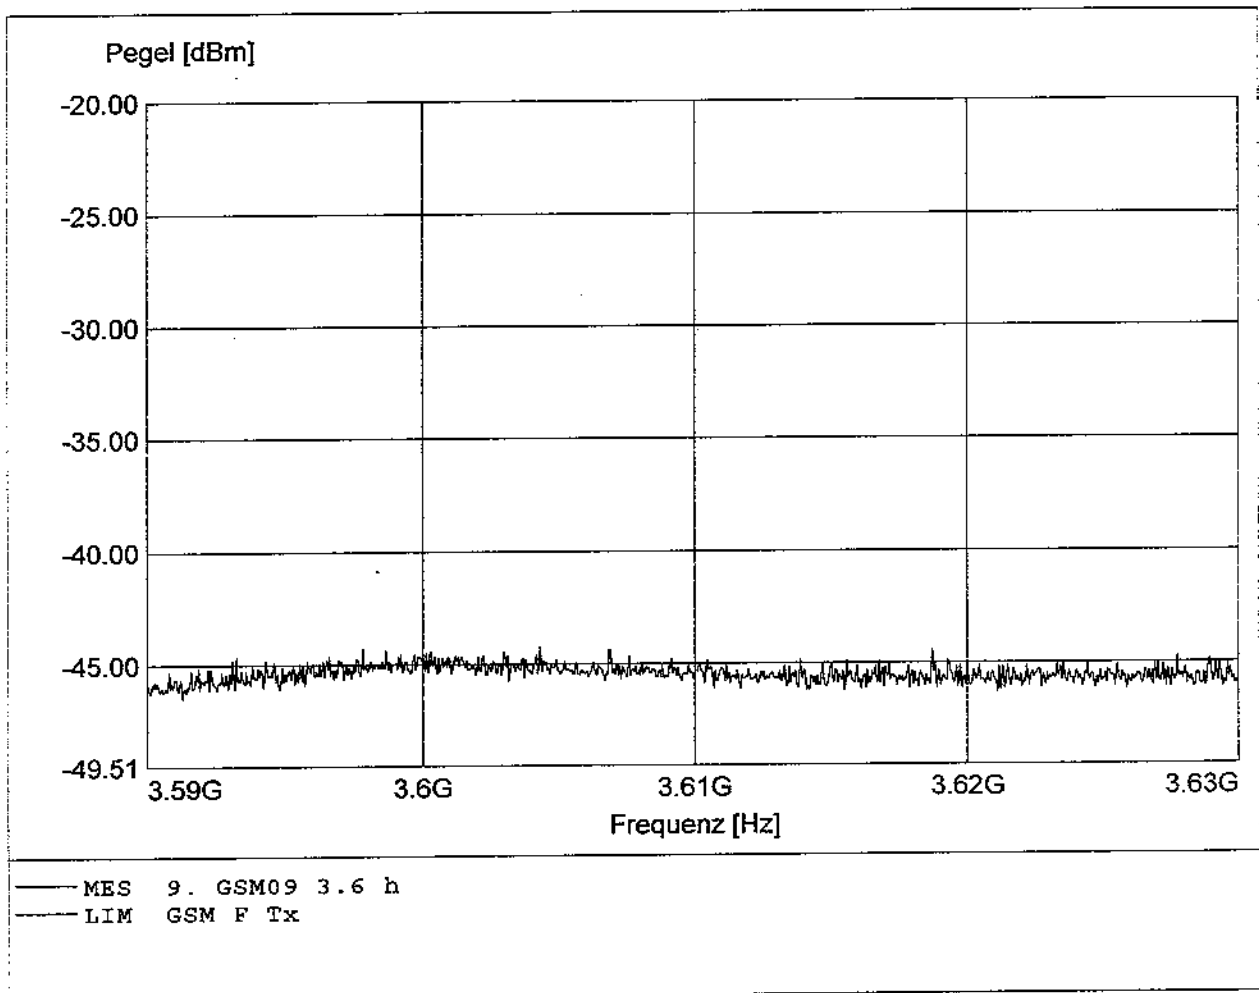

**Radiated spurious emissions-MS in idle mode
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.2
Comment 1: Dist.: 3m, Ant.: HK 116, Ampl.: None
Comment 2: Freq:98.833MHz Pmax:-67.32 RBW:10-100KHz

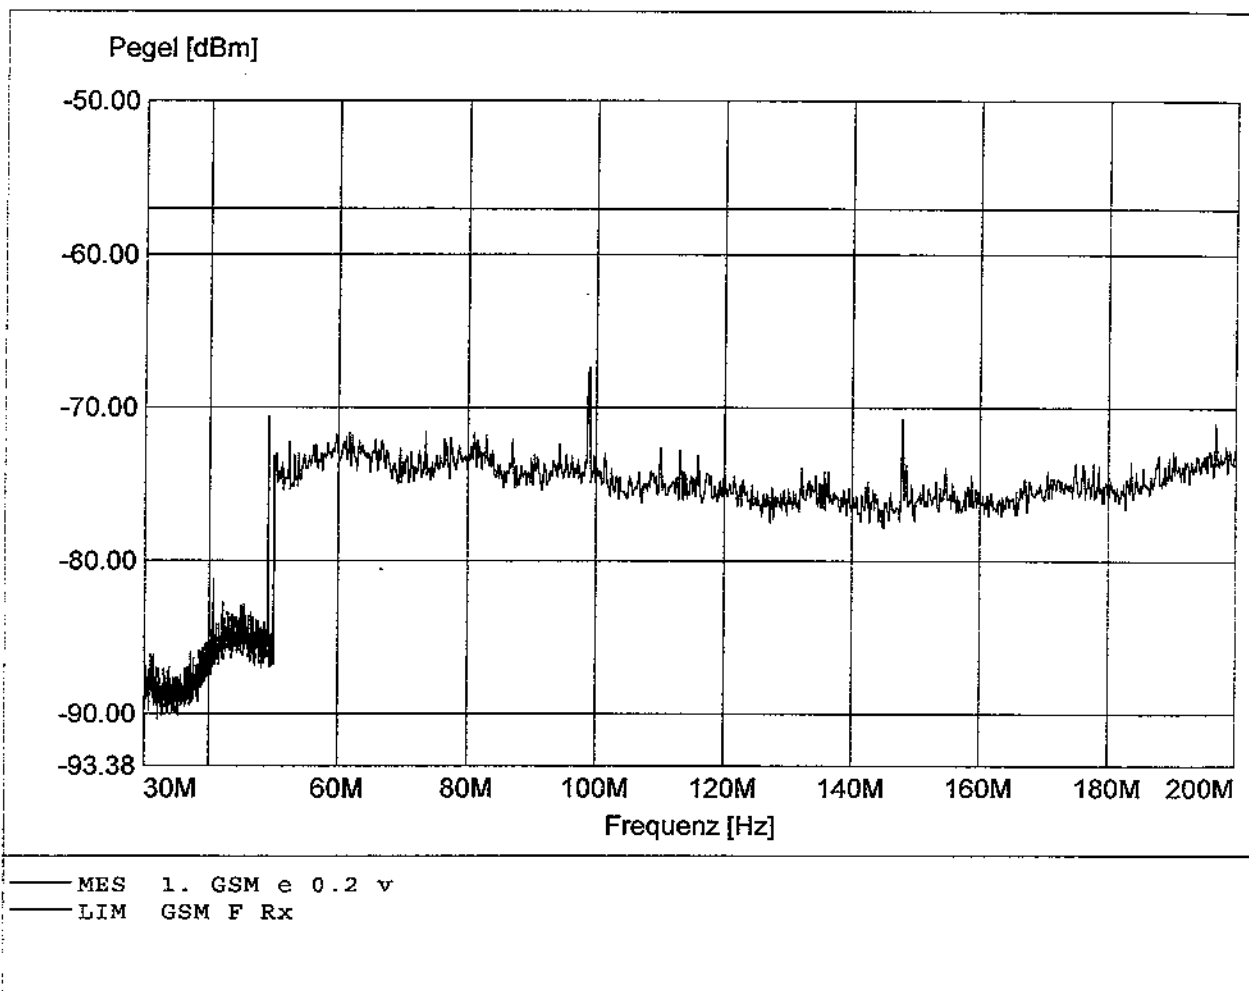

**Radiated spurious emissions-MS in idle mode
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.2
Comment 1: Dist.: 3m, Ant.: HK 116, Ampl.: None
Comment 2: Freq:98.833MHz Pmax:-69.42 RBW:10-100KHz

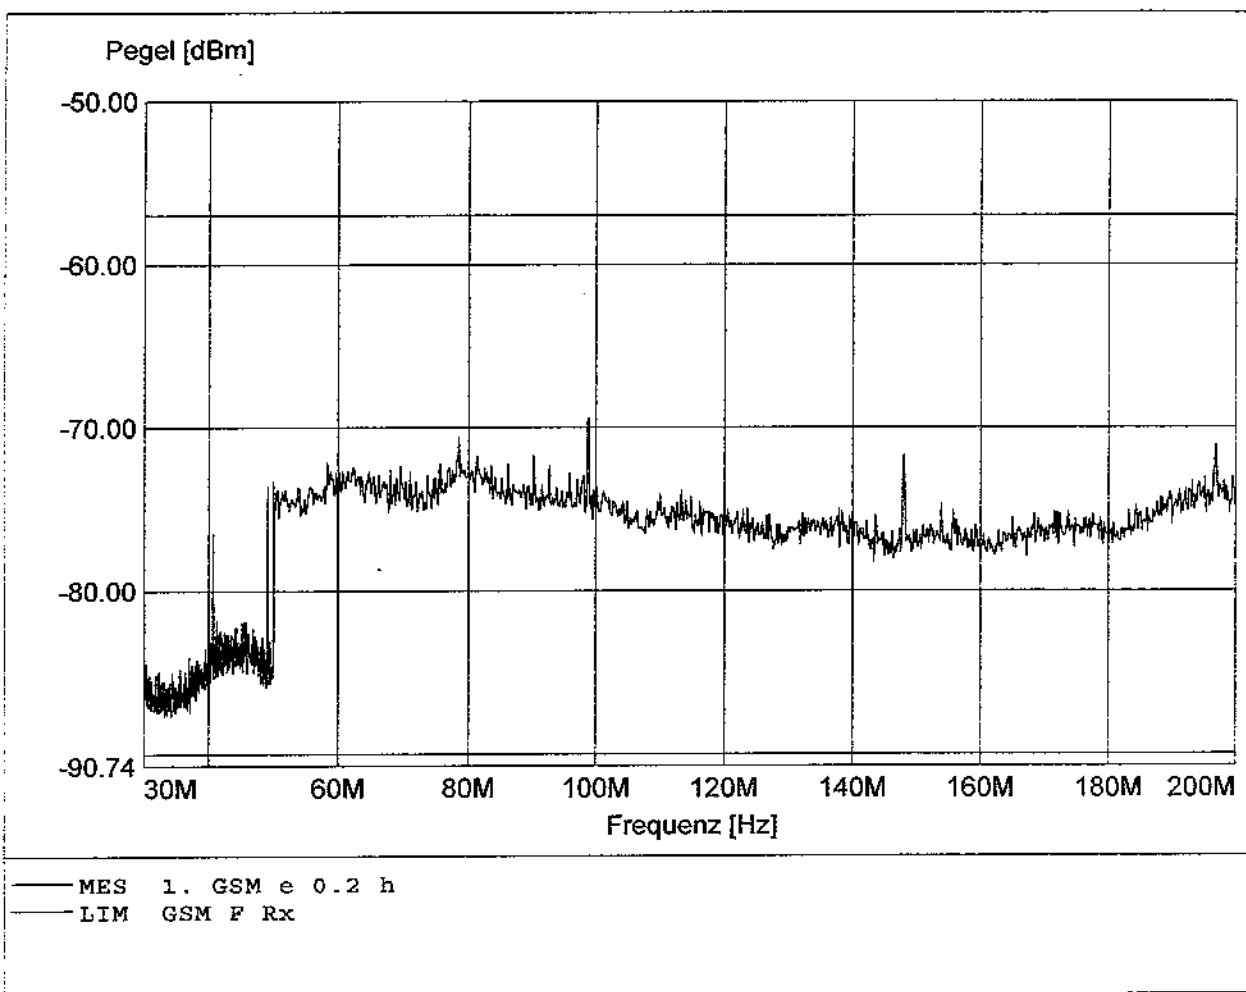

**Radiated spurious emissions-MS in idle mode
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.2
Comment 1: Dist.: 3m, Ant.: H1 223, Ampl.: 0.2-1GHz
Comment 2: Freq:934.222MHz Pmax:-65.13 RBW:100KHz

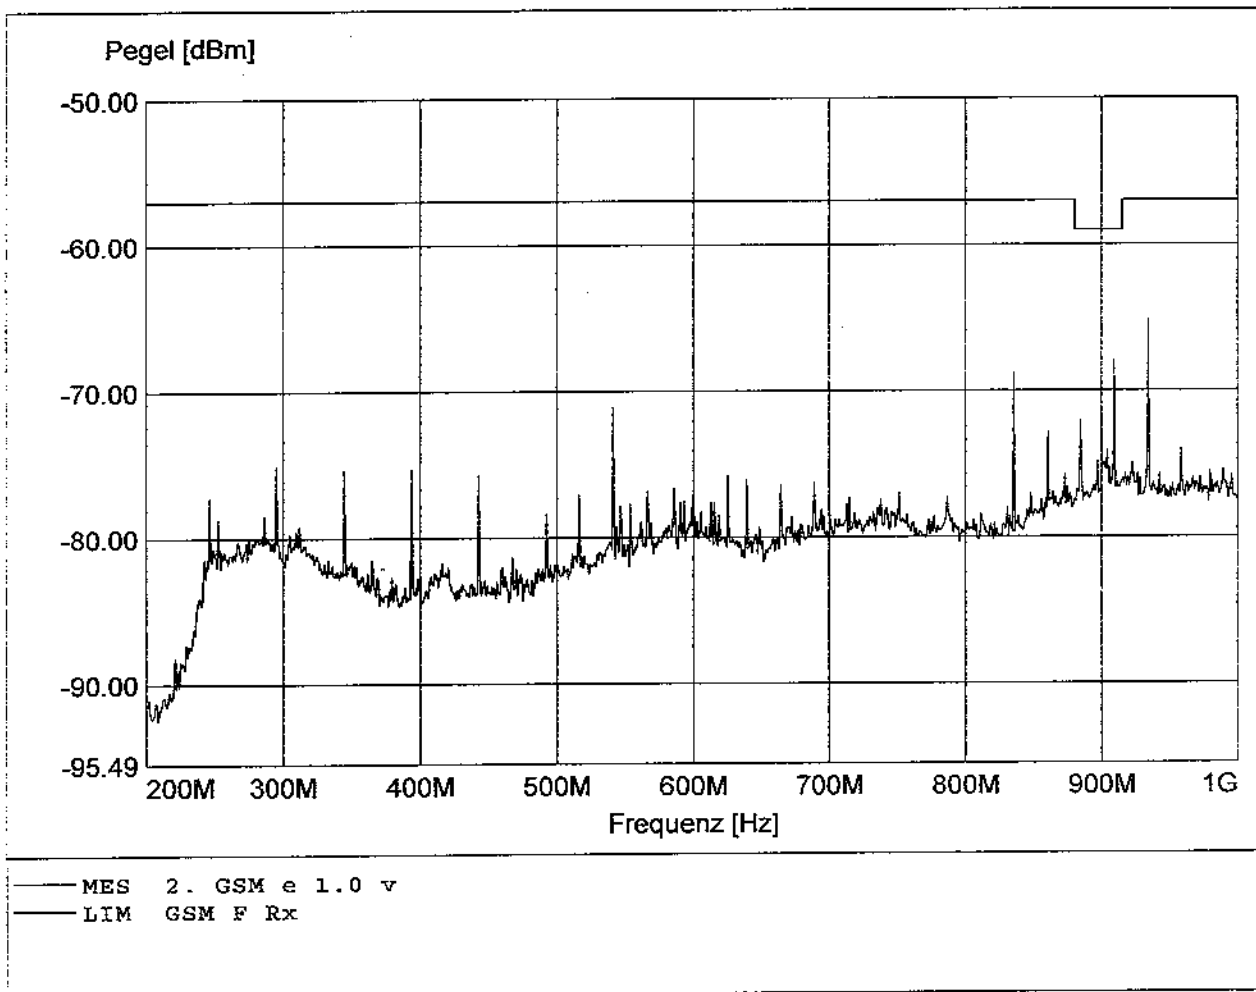

**Radiated spurious emissions-MS in idle mode
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.2
Comment 1: Dist.: 3m, Ant.: H1 223, Ampl.: 0.2-1GHz
Comment 2: Freq:934.222MHz Pmax:-61.53 RBW:100KHz

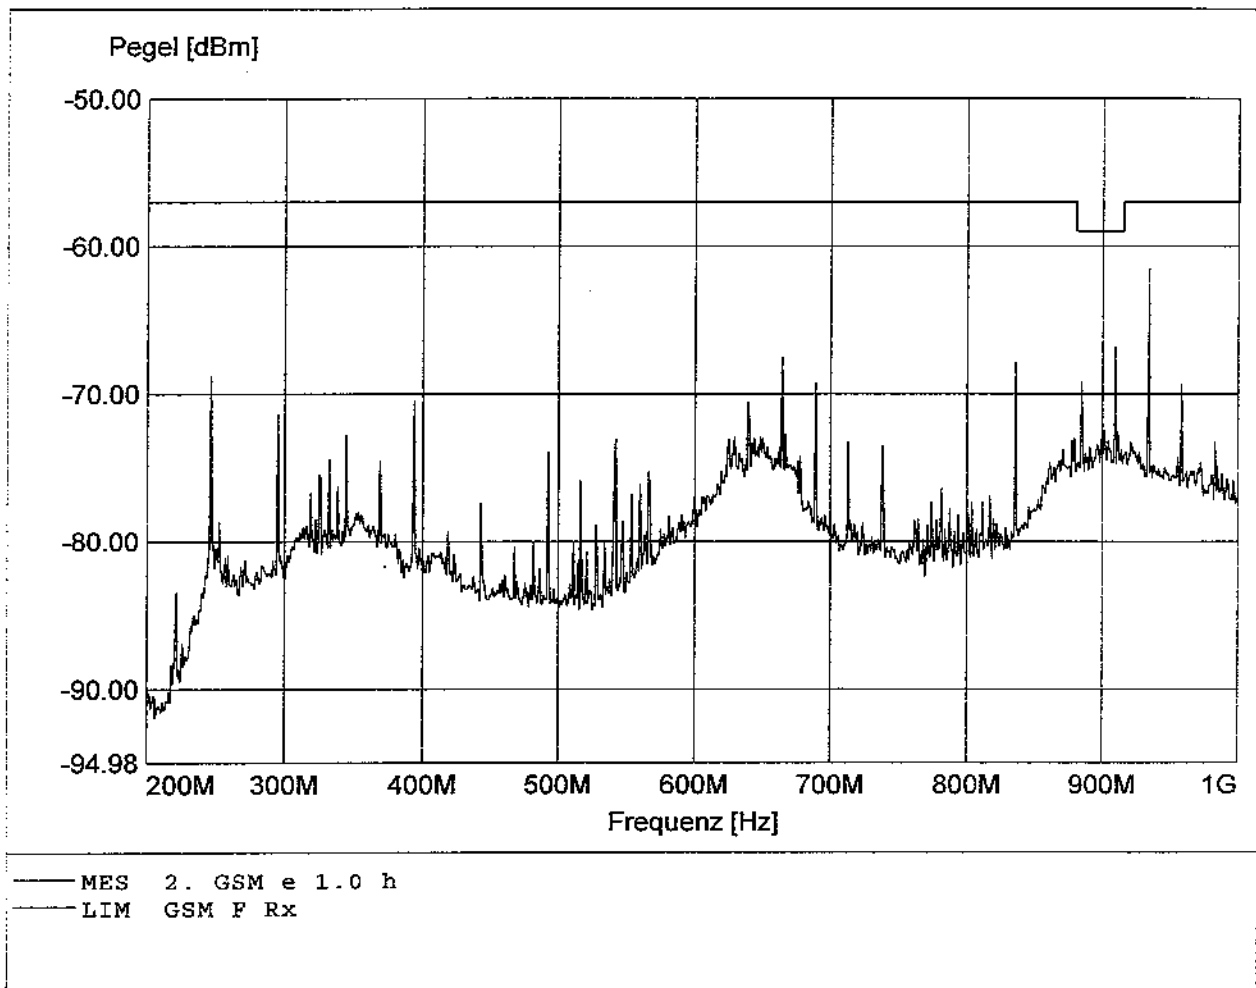

**Radiated spurious emissions-MS in idle mode
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.2
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.: 1-4GHz
Comment 2: Freq:3.530GHz Pmax:-61.30 RBW:100KHz

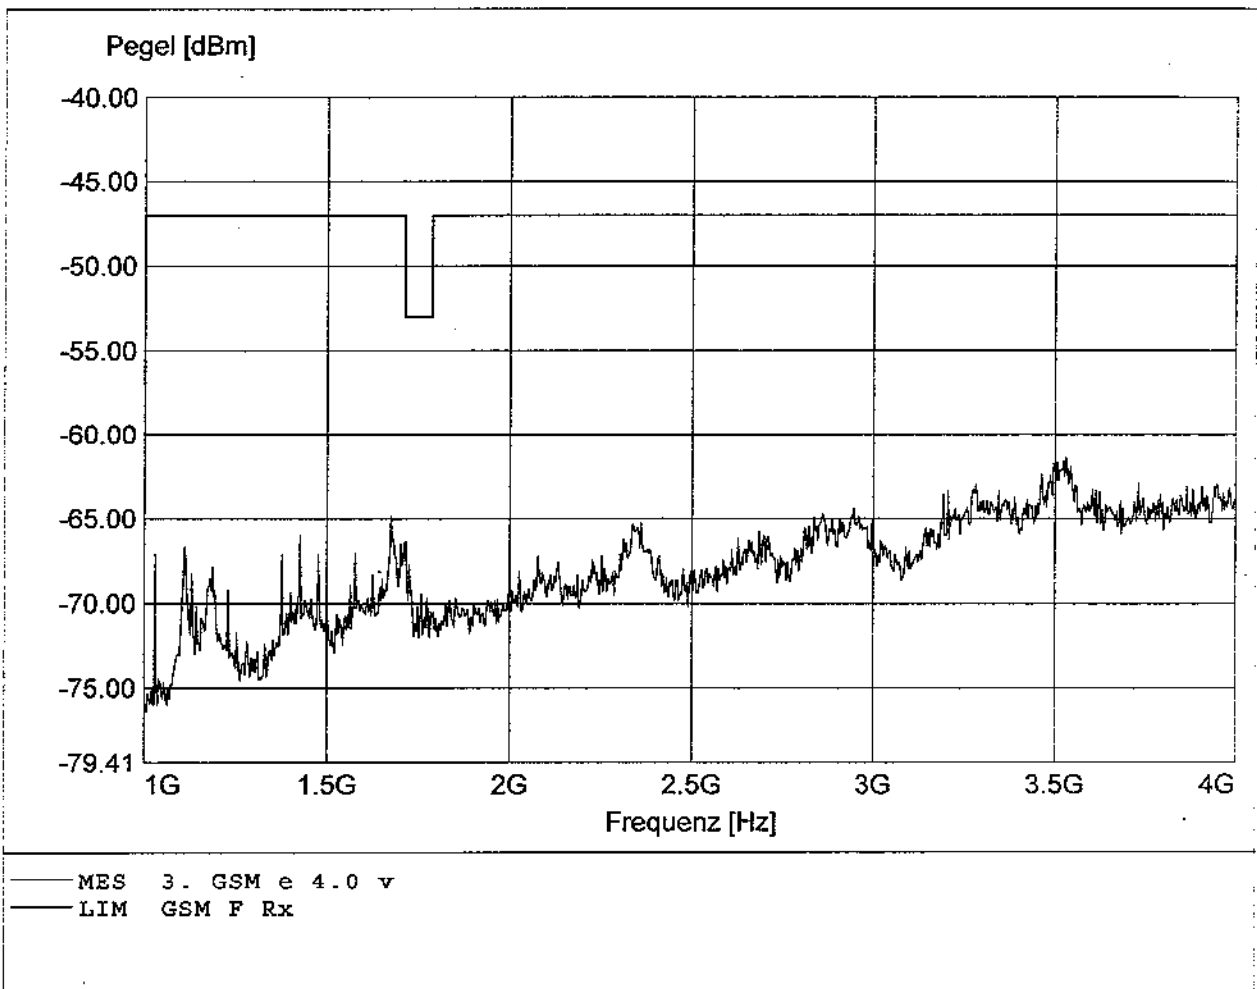

**Radiated spurious emissions-MS in idle mode
EGSM 900 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.2
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.: 1-4GHz
Comment 2: Freq:1.030GHz Pmax:-58.95 RBW:100KHz

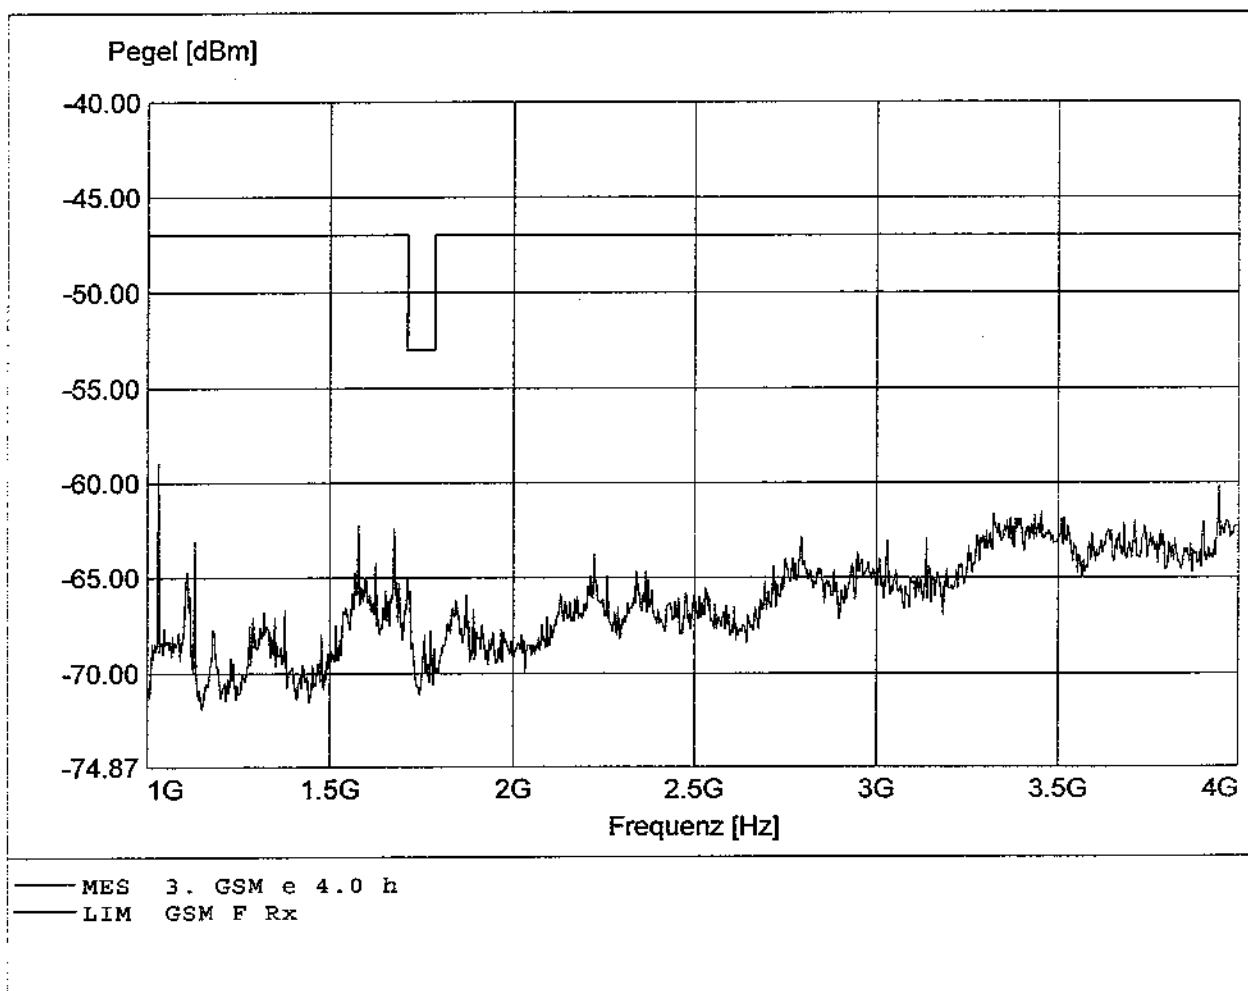

**Radiated spurious emissions-MS allocated ch: 697
PCN 1800 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:49.111MHz Pmax:-60.16 RBW:10/100KHz

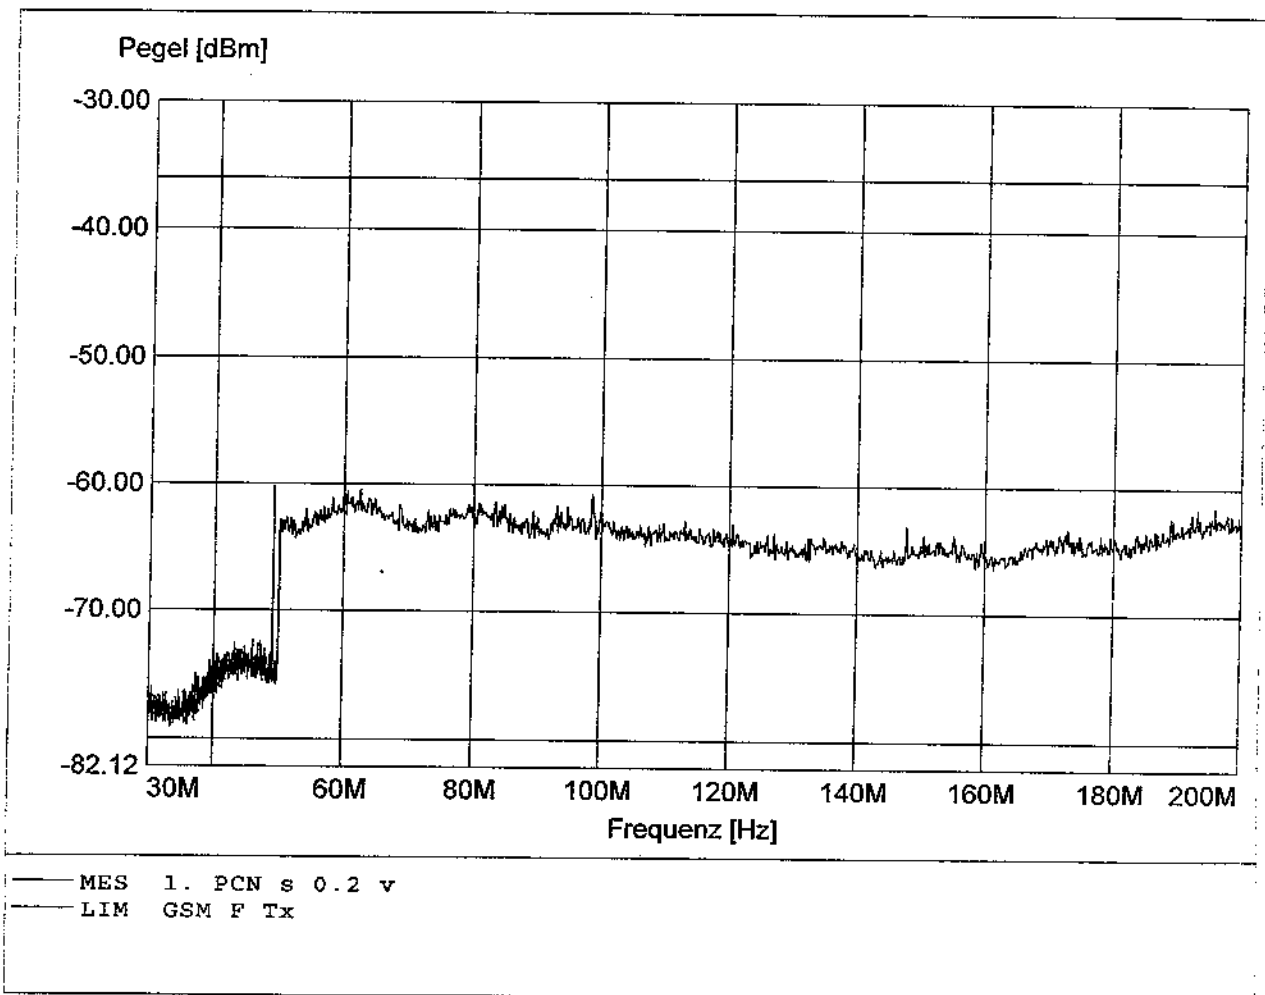

Radiated spurious emissions-MS allocated ch: 697
PCN 1800 (Fully anechoic chamber)

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:83.833MHz Pmax:-57.89 RBW:10/100KHz

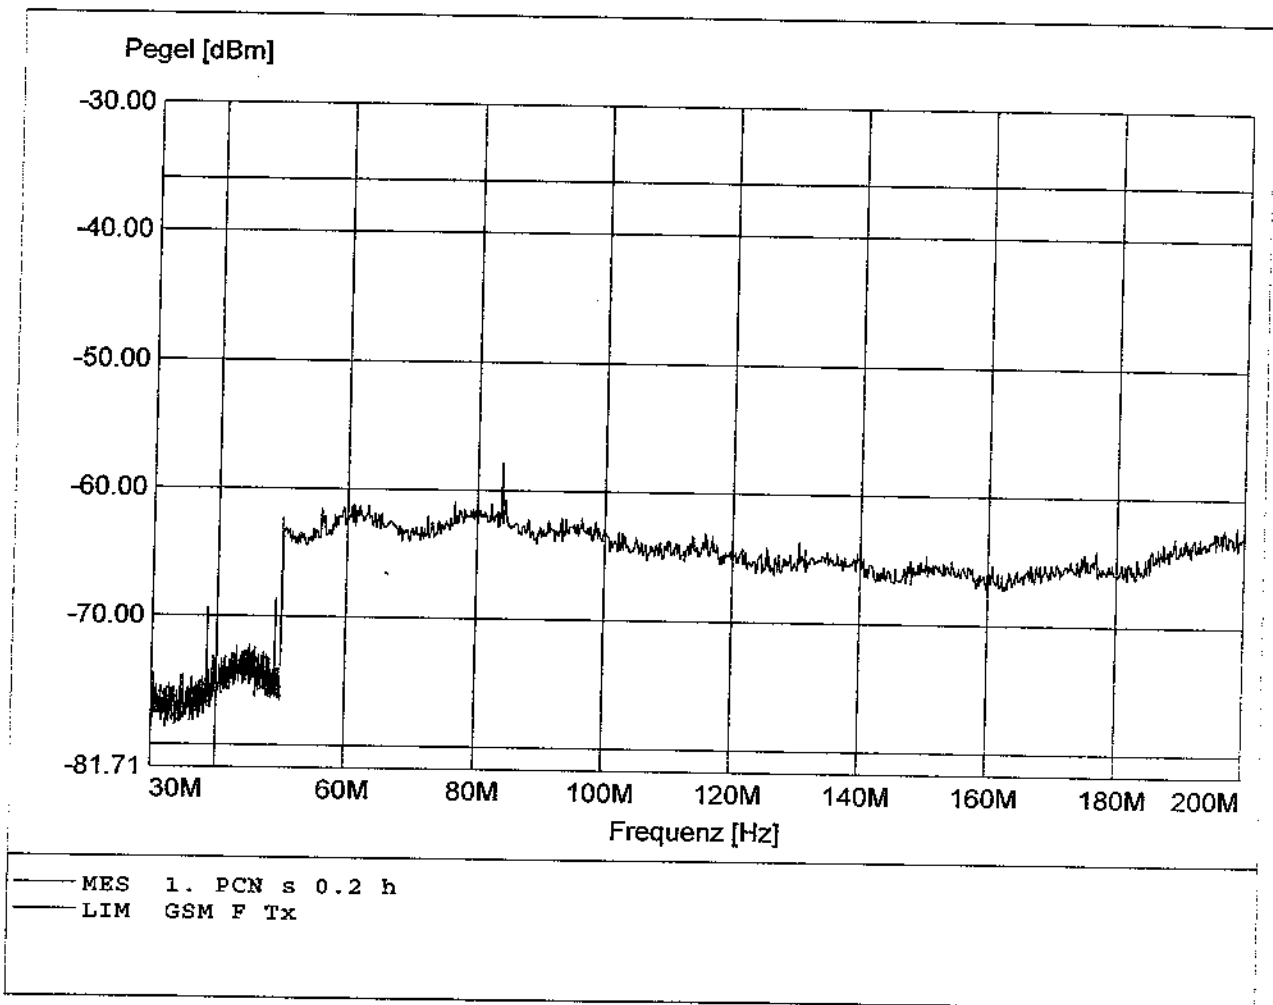

**Radiated spurious emissions-MS allocated ch: 697
PCN 1800 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 223, Ampl.: 0.2-1 GHz
Comment 2: Freq:975.000MHz Pmax:-57.82 RBW:0.1/3MHz

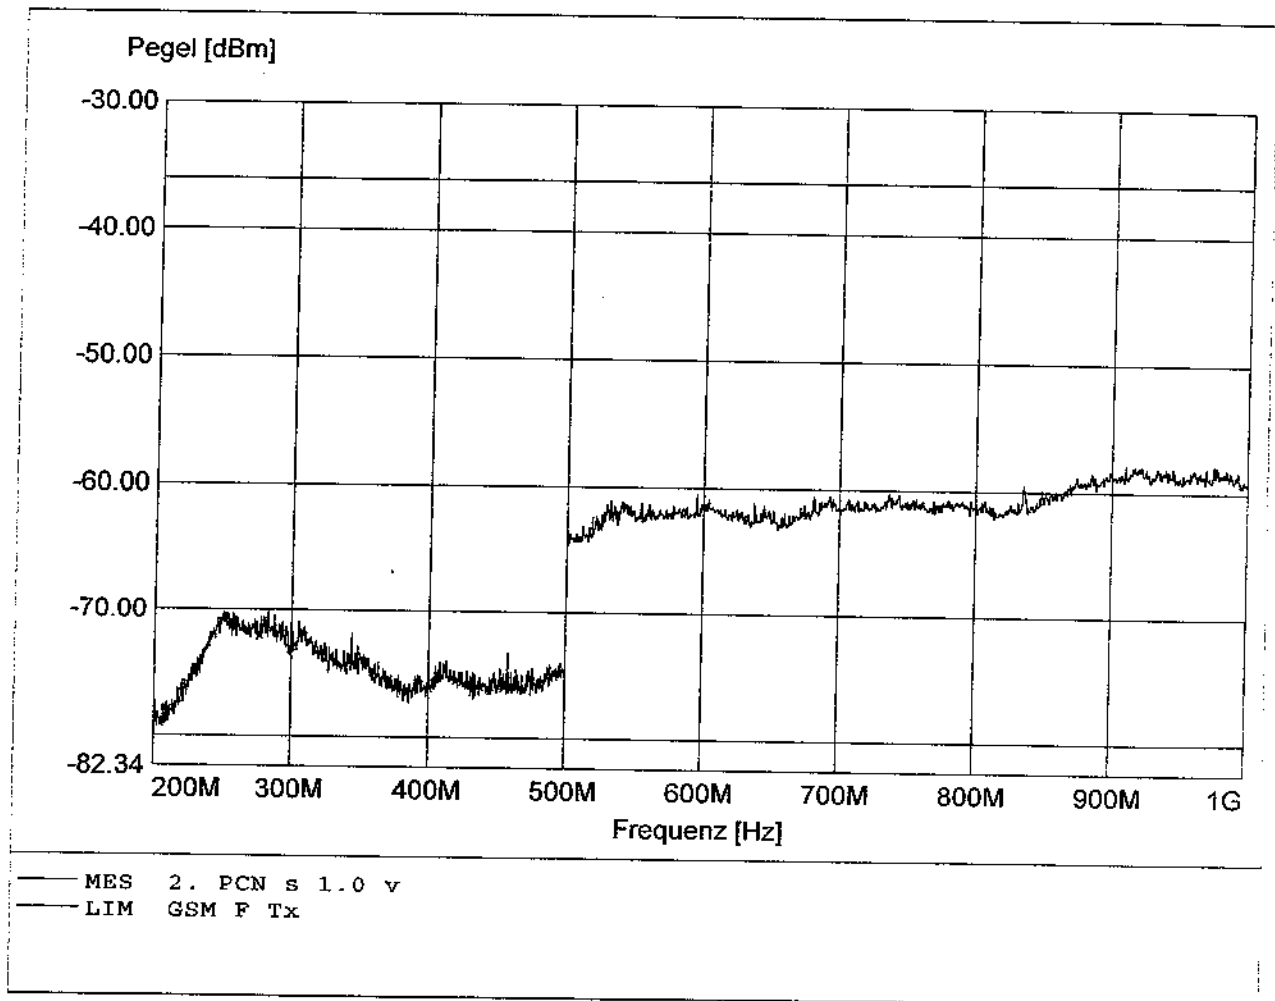

Radiated spurious emissions-MS allocated ch: 697
PCN 1800 (Fully anechoic chamber)

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 223, Ampl.: 0.2-1 GHz
Comment 2: Freq:651.111MHz Pmax:-55.69 RBW:0.1/3MHz

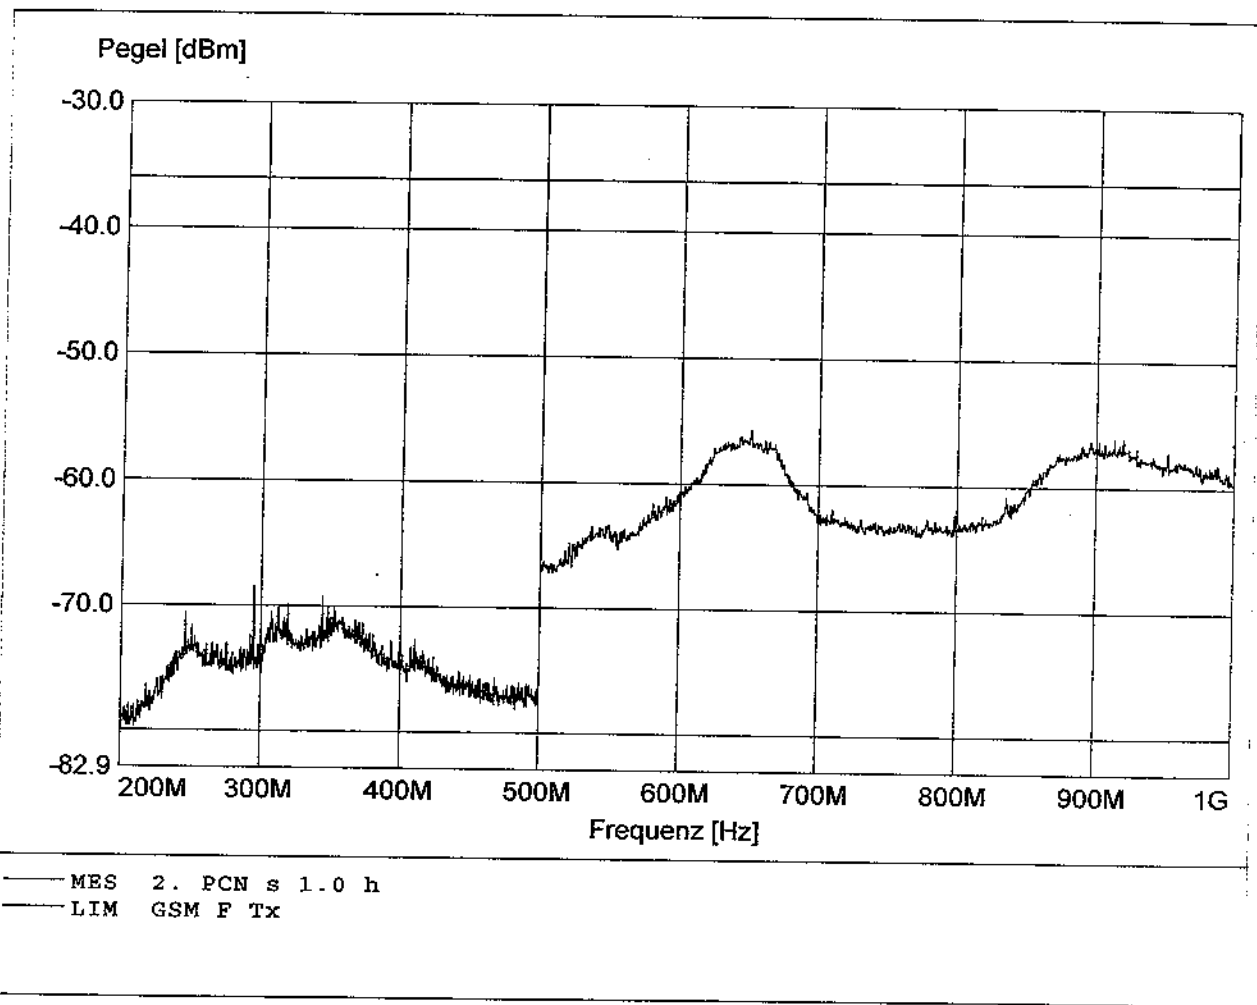

Radiated spurious emissions-MS allocated ch: 697
PCN 1800 (Fully anechoic chamber)

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.: 1-4 GHz
Comment 2: Freq:1.679GHz Pmax:-49.38 RBW:3MHz

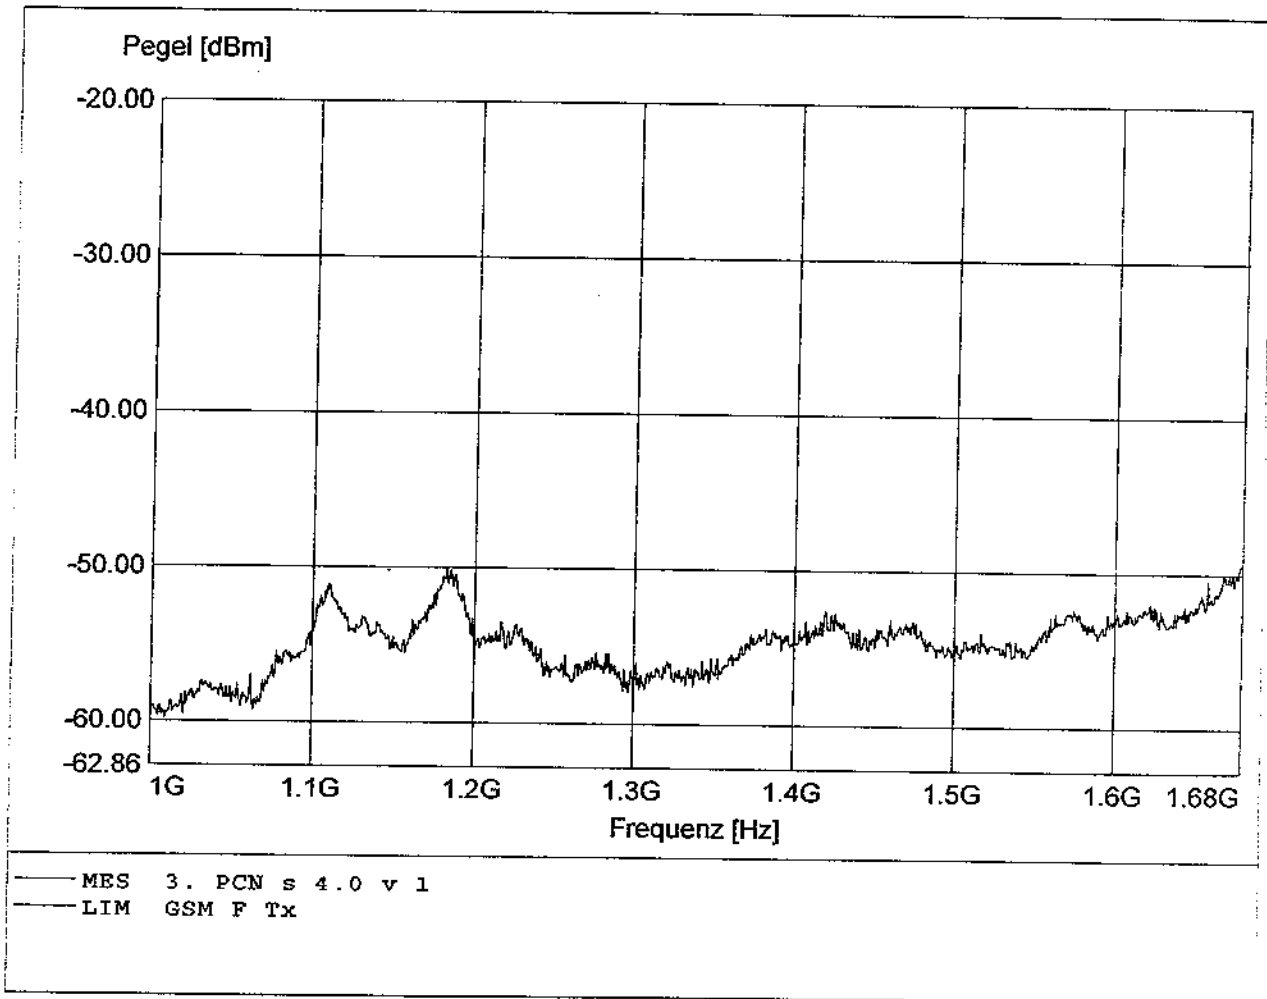

**Radiated spurious emissions-MS allocated ch: 697
PCN 1800 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.: 1-4 GHz
Comment 2: Freq:1.573GHz Pmax:-47.01 RBW:3MHz

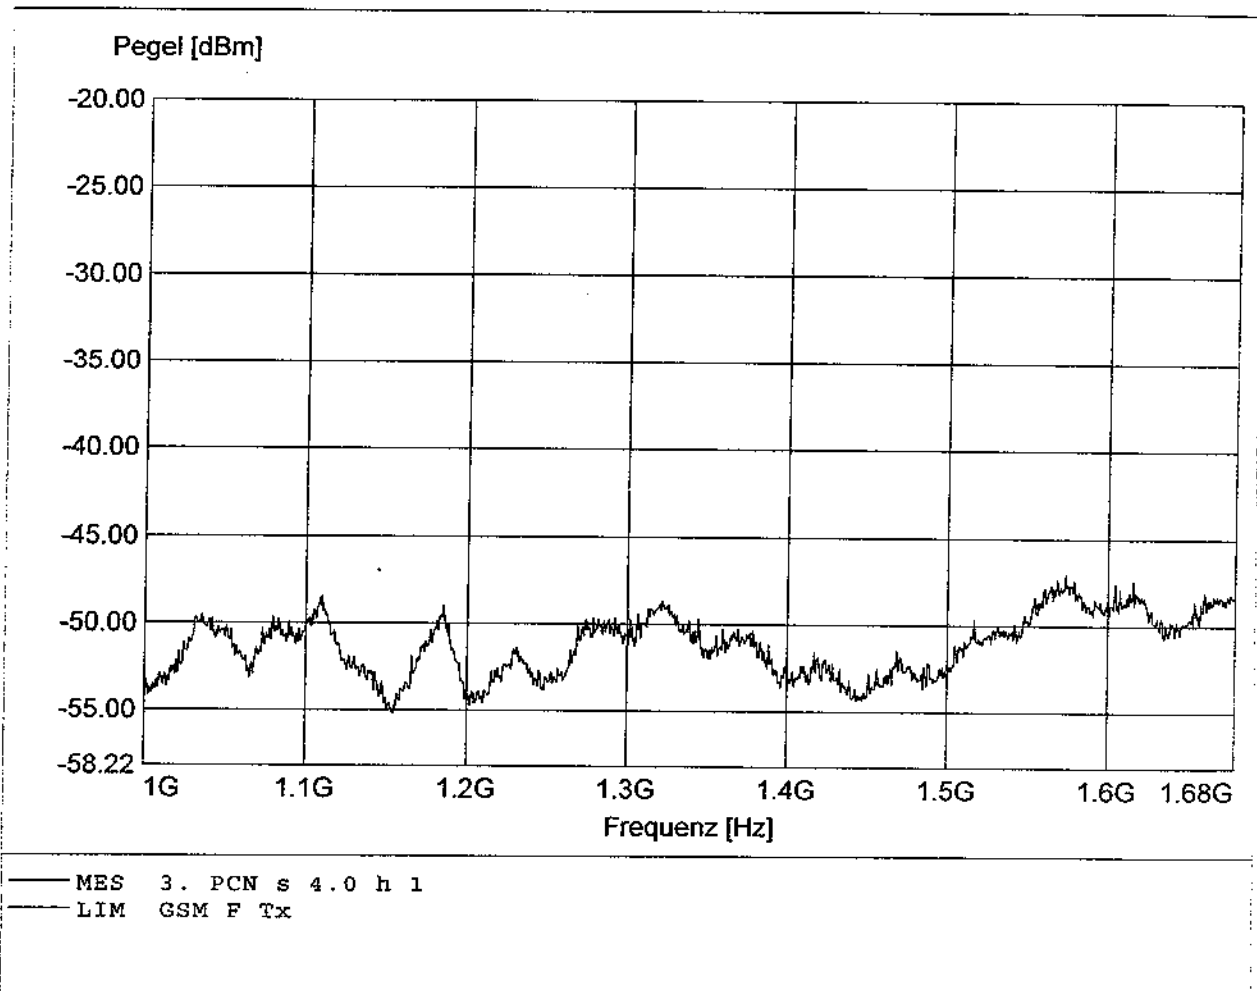

Radiated spurious emissions-MS allocated ch: 697
PCN 1800 (Fully anechoic chamber)

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.: 1-4 GHz
Comment 2: Freq:1.698GHz Pmax:-49.64 RBW:1MHz to 30KHz

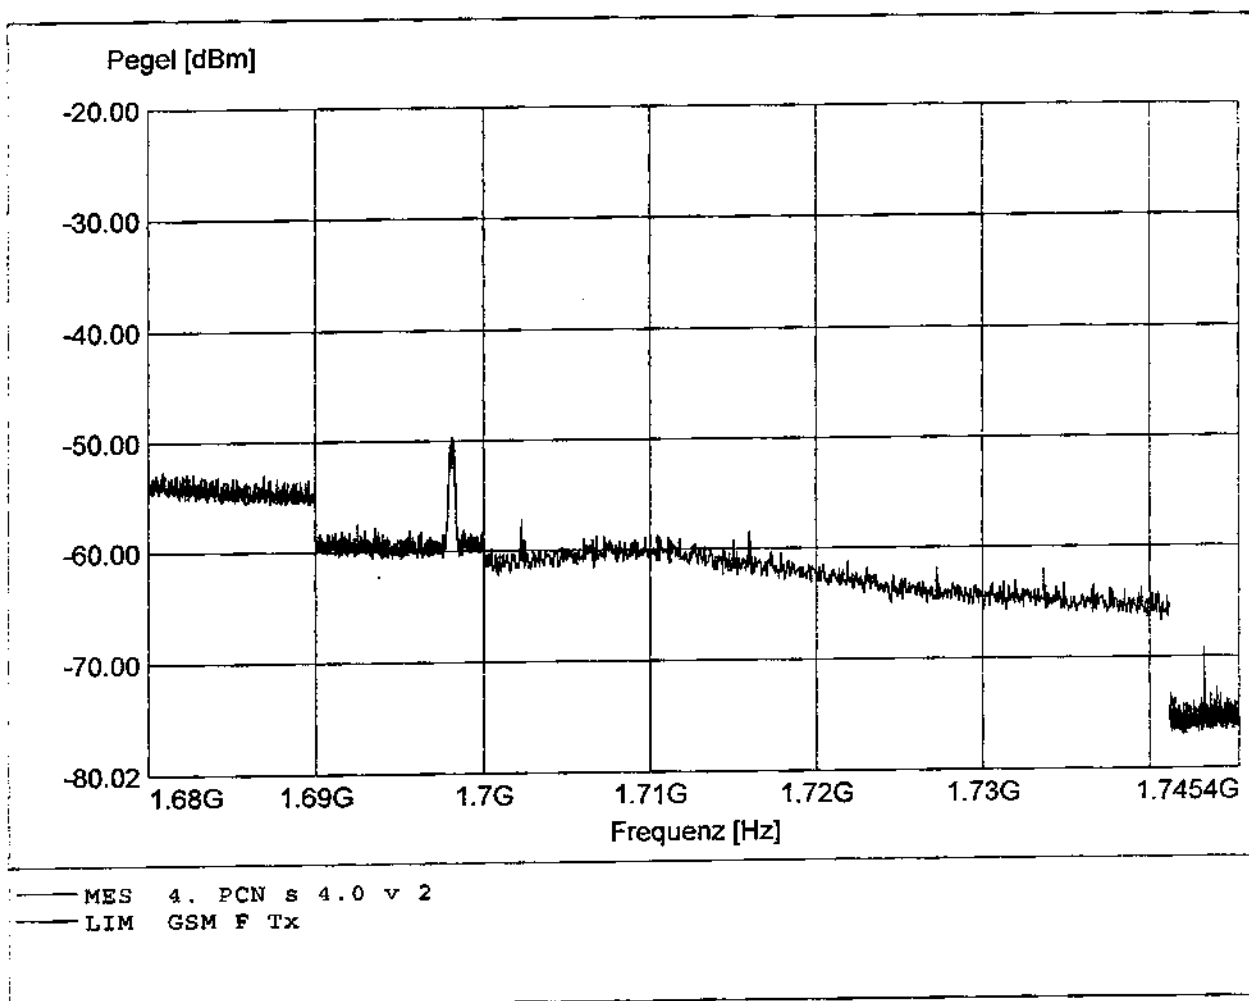

**Radiated spurious emissions-MS allocated ch: 697
PCN 1800 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.: 1-4 GHz
Comment 2: Freq:1.698GHz Pmax:-47.30 RBW:1MHz to 30KHz

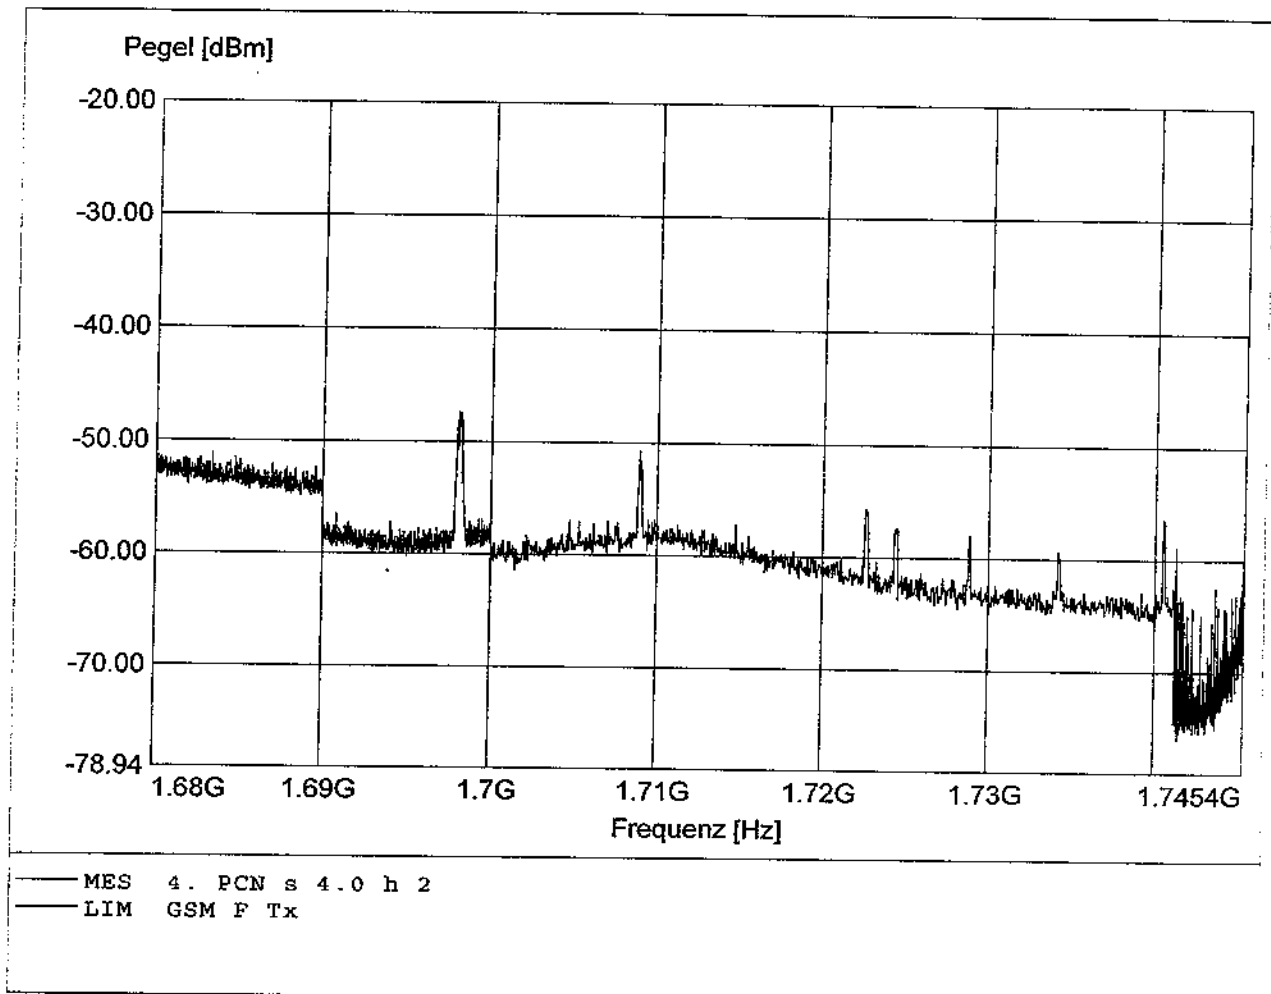

Radiated spurious emissions-MS allocated ch: 697
PCN 1800 (Fully anechoic chamber)

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.: 1-4 GHz
Comment 2: Freq:1.753GHz Pmax:-52.08 RBW:30KHz to 1MHz

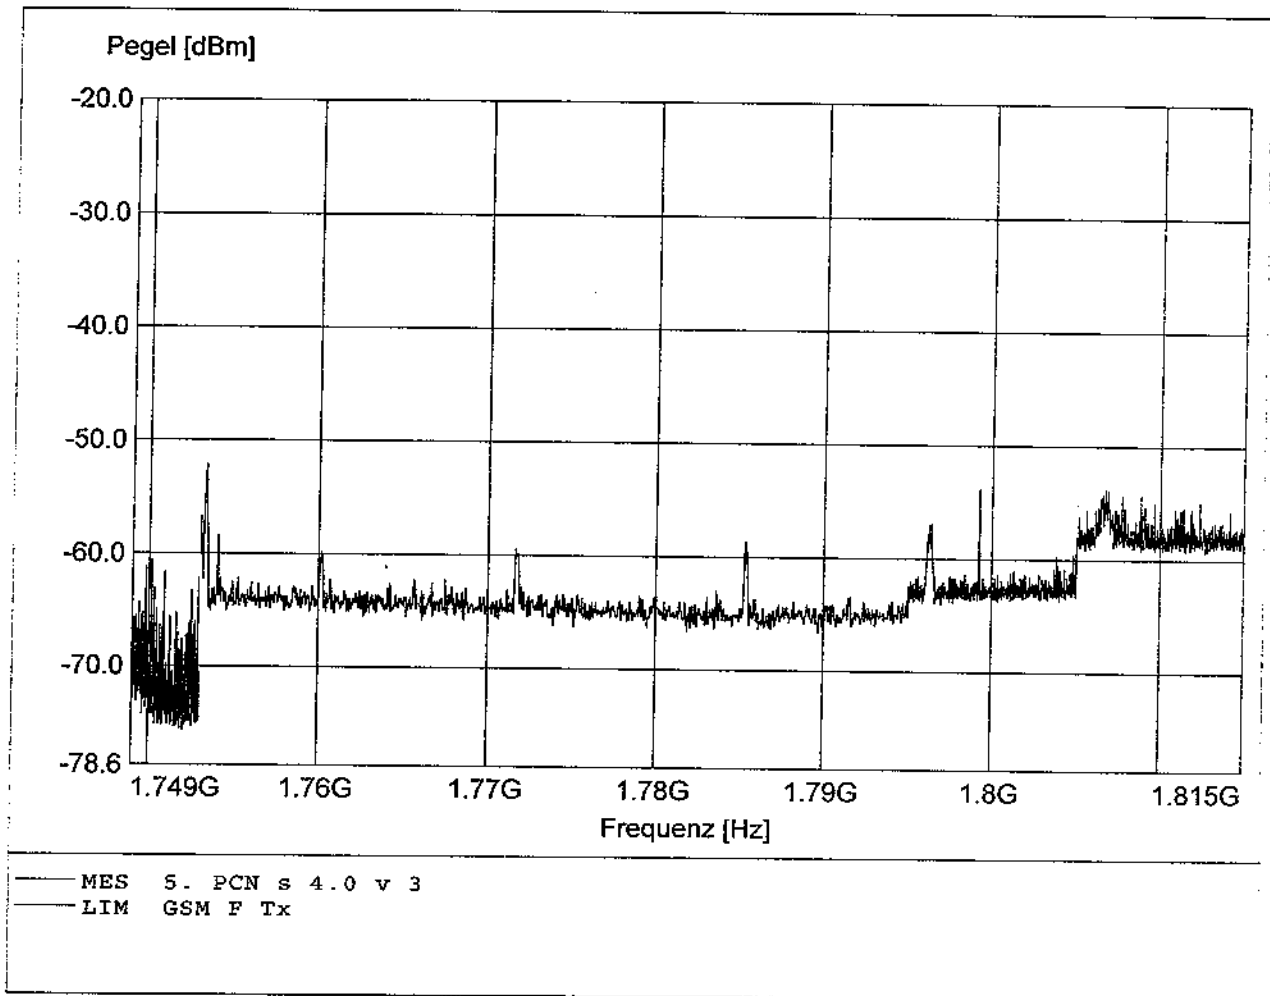

**Radiated spurious emissions-MS allocated ch: 697
PCN 1800 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.: 1-4 GHz
Comment 2: Freq:1.750GHz Pmax:-39.22 RBW:30KHz to 1MHz

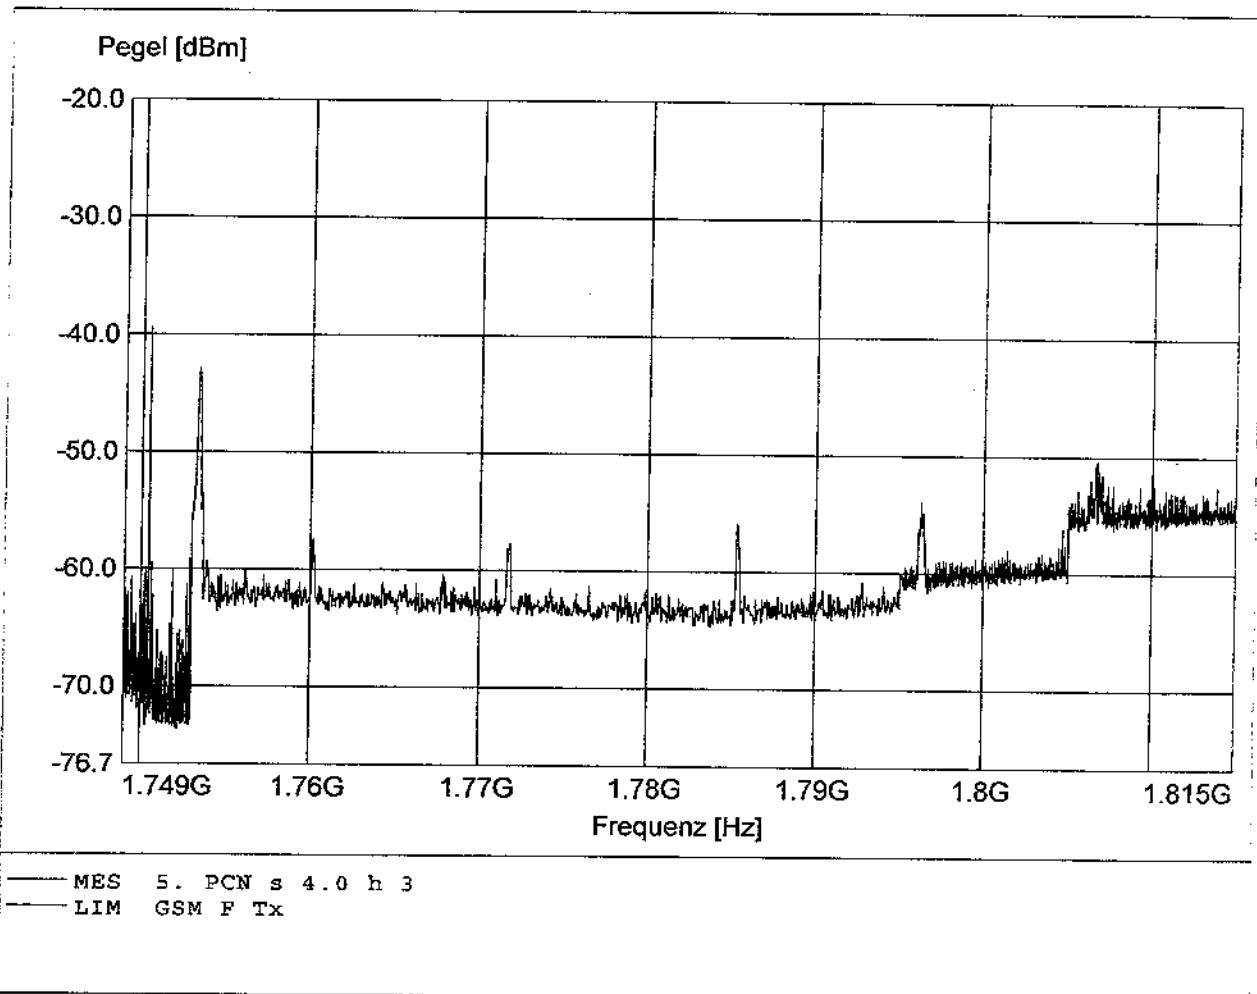

**Radiated spurious emissions-MS allocated ch: 697
PCN 1800 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.: 1-4 GHz
Comment 2: Freq:3.500GHz Pmax:-31.24 RBW:3MHz

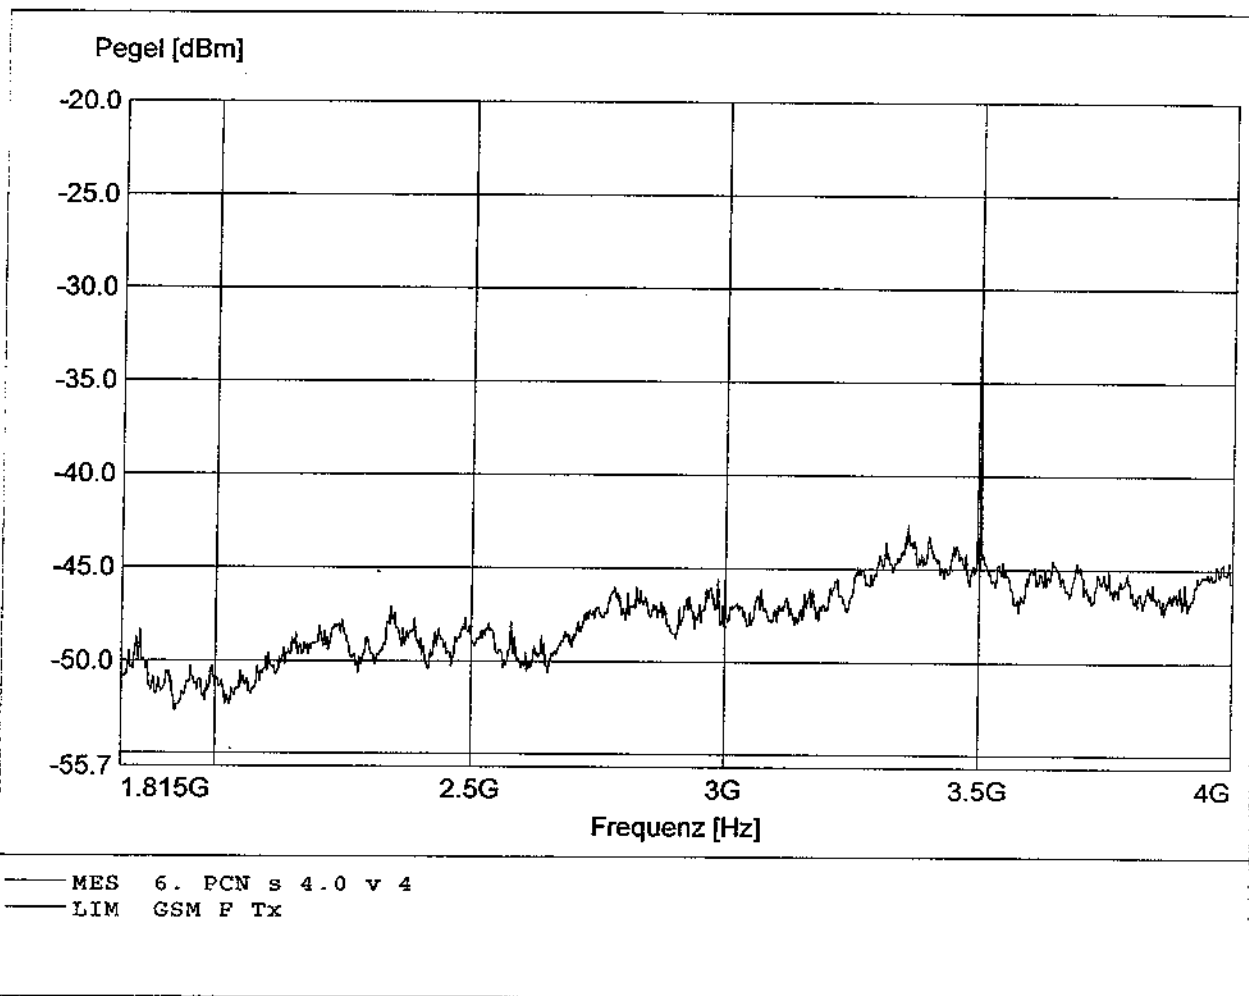

**Radiated spurious emissions-MS allocated ch: 697
PCN 1800 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.: 1-4 GHz
Comment 2: Freq:3.500GHz Pmax:-32.56 RBW:3MHz

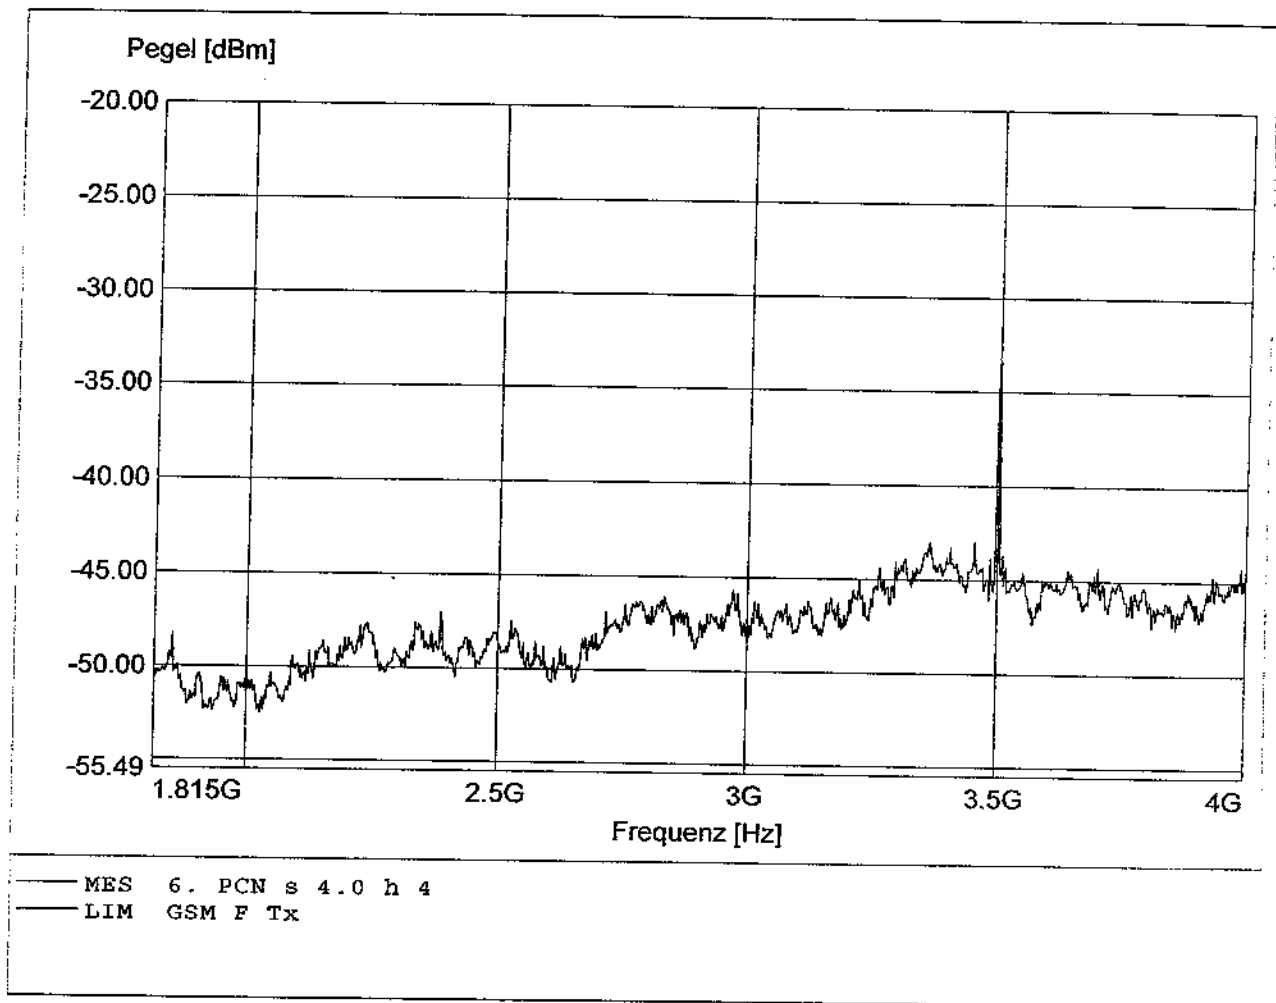

2.Harmonic - MS allocated channel 697
PCN 1800 (Fully anechoic chamber)

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.: 1-4 GHz
Comment 2: Freq:3.495GHz Pmax:-30.45 RBW:3MHz

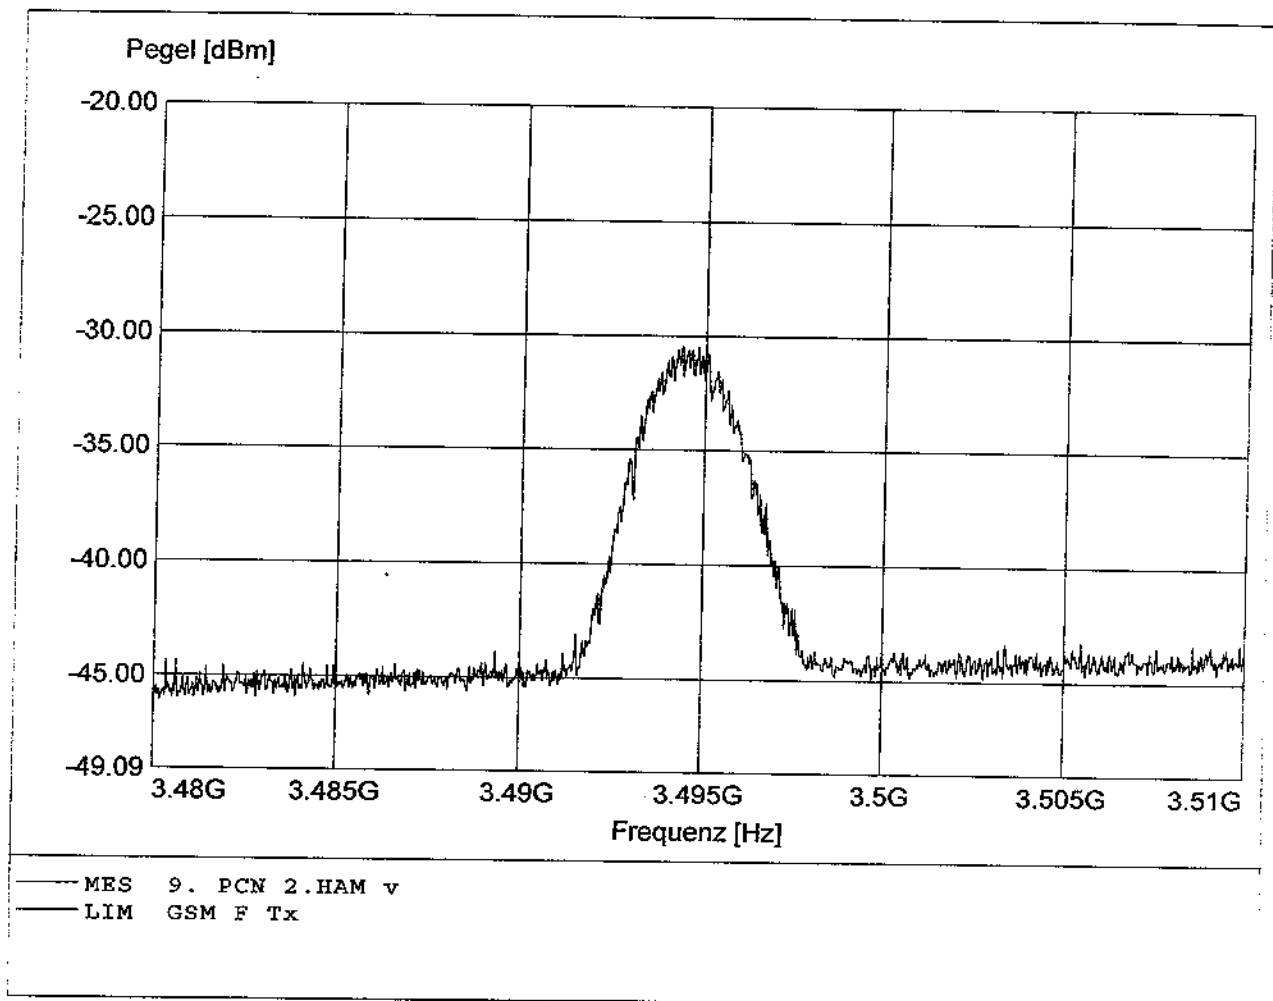

2.Harmonic - MS allocated channel 697
PCN 1800 (Fully anechoic chamber)

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.1
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.: 1-4 GHz
Comment 2: Freq:3.495GHz Pmax:-32.04 RBW:3MHz

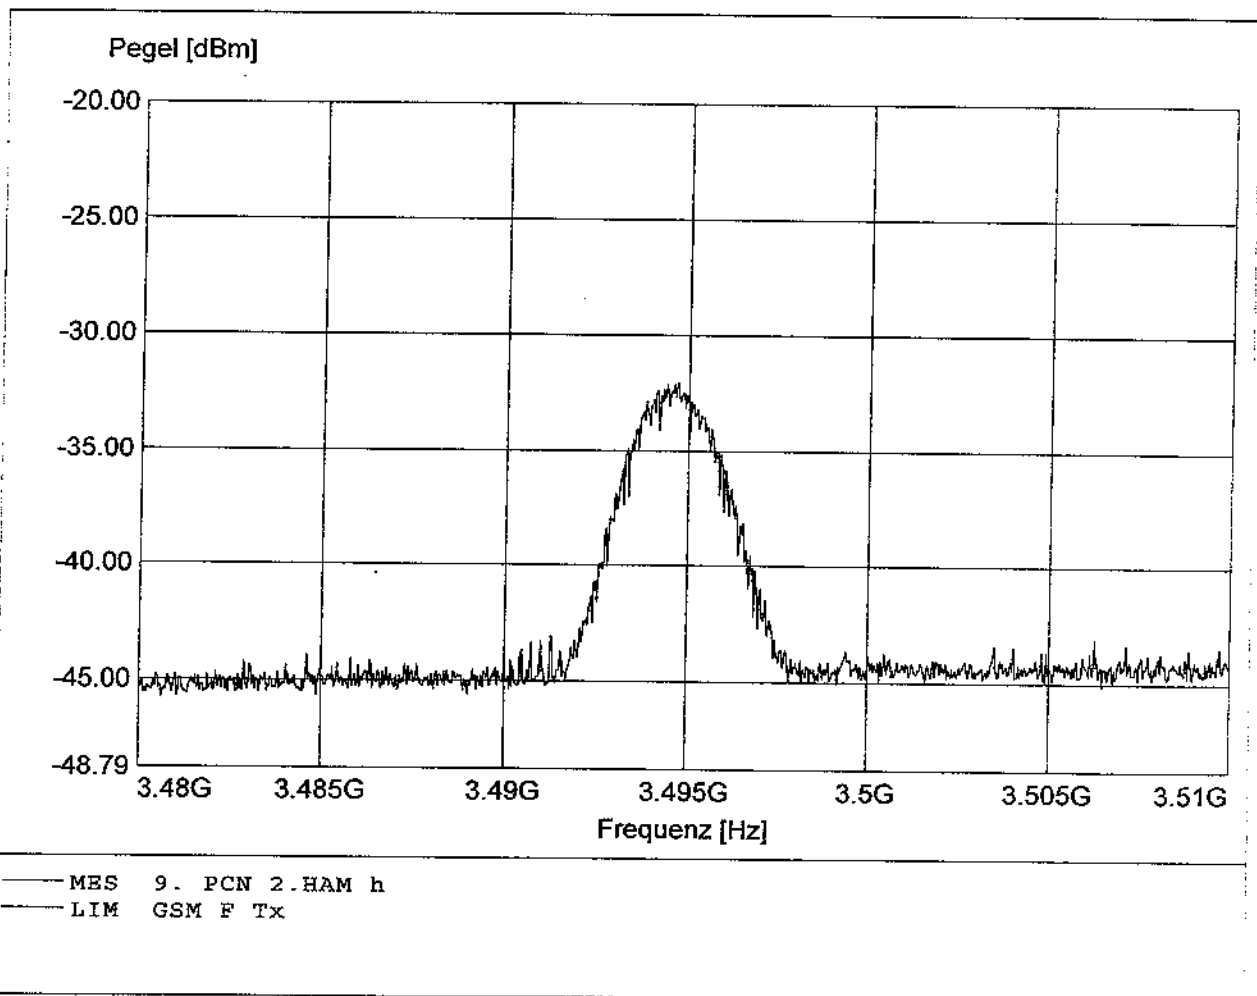

**Radiated spurious emissions-MS in idle mode
PCN 1800 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.2
Comment 1: Dist.: 3m, Ant.: HK 116, Ampl.: None
Comment 2: Freq:98.833MHz Pmax:-65.85 RBW:10-100KHz

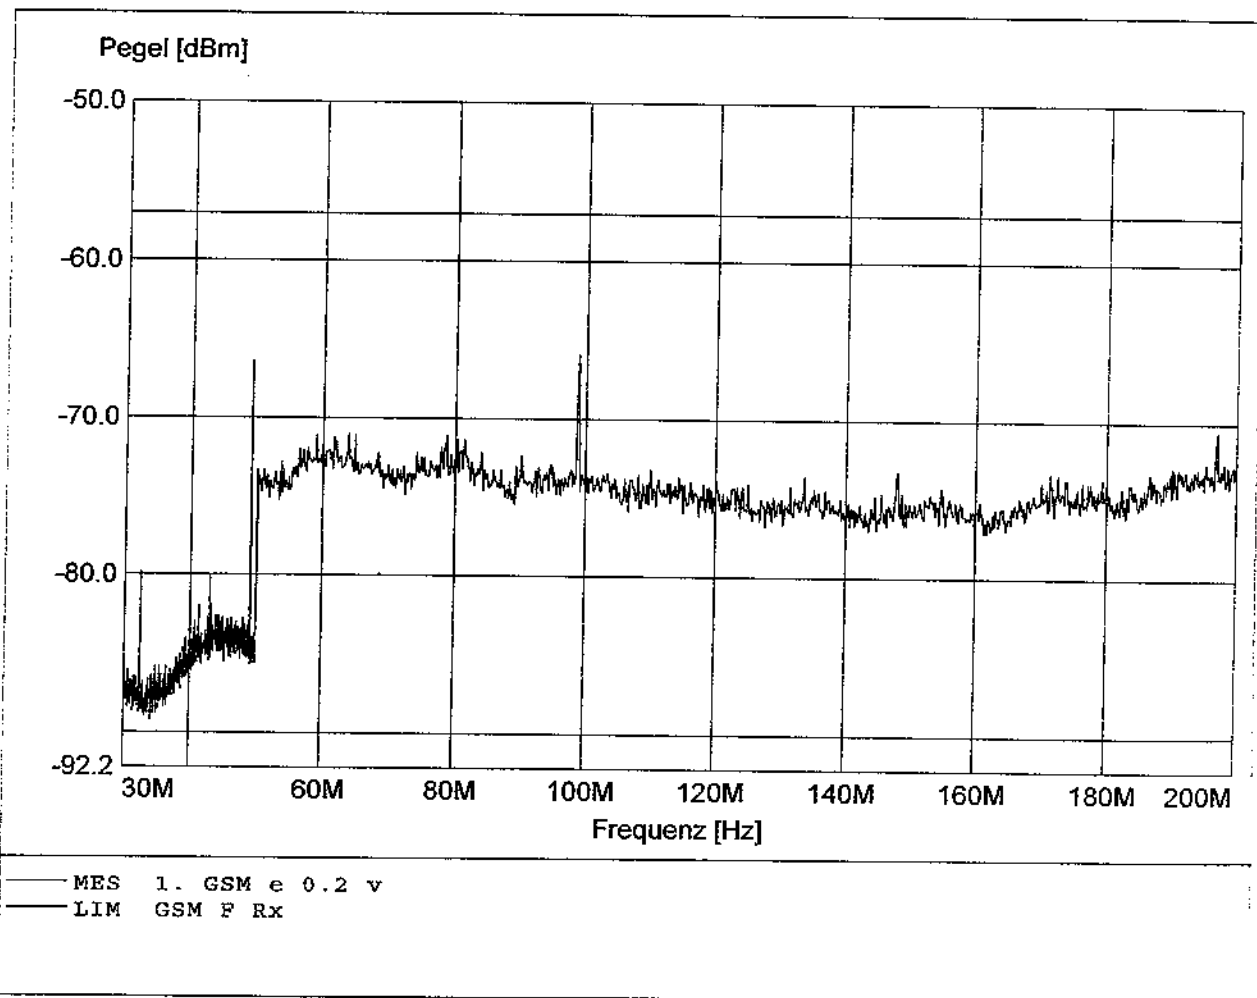

**Radiated spurious emissions-MS in idle mode
PCN 1800 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.2
Comment 1: Dist.: 3m, Ant.: HK 116, Ampl.: None
Comment 2: Freq:98.833MHz Pmax:-68.53 RBW:10-100KHz

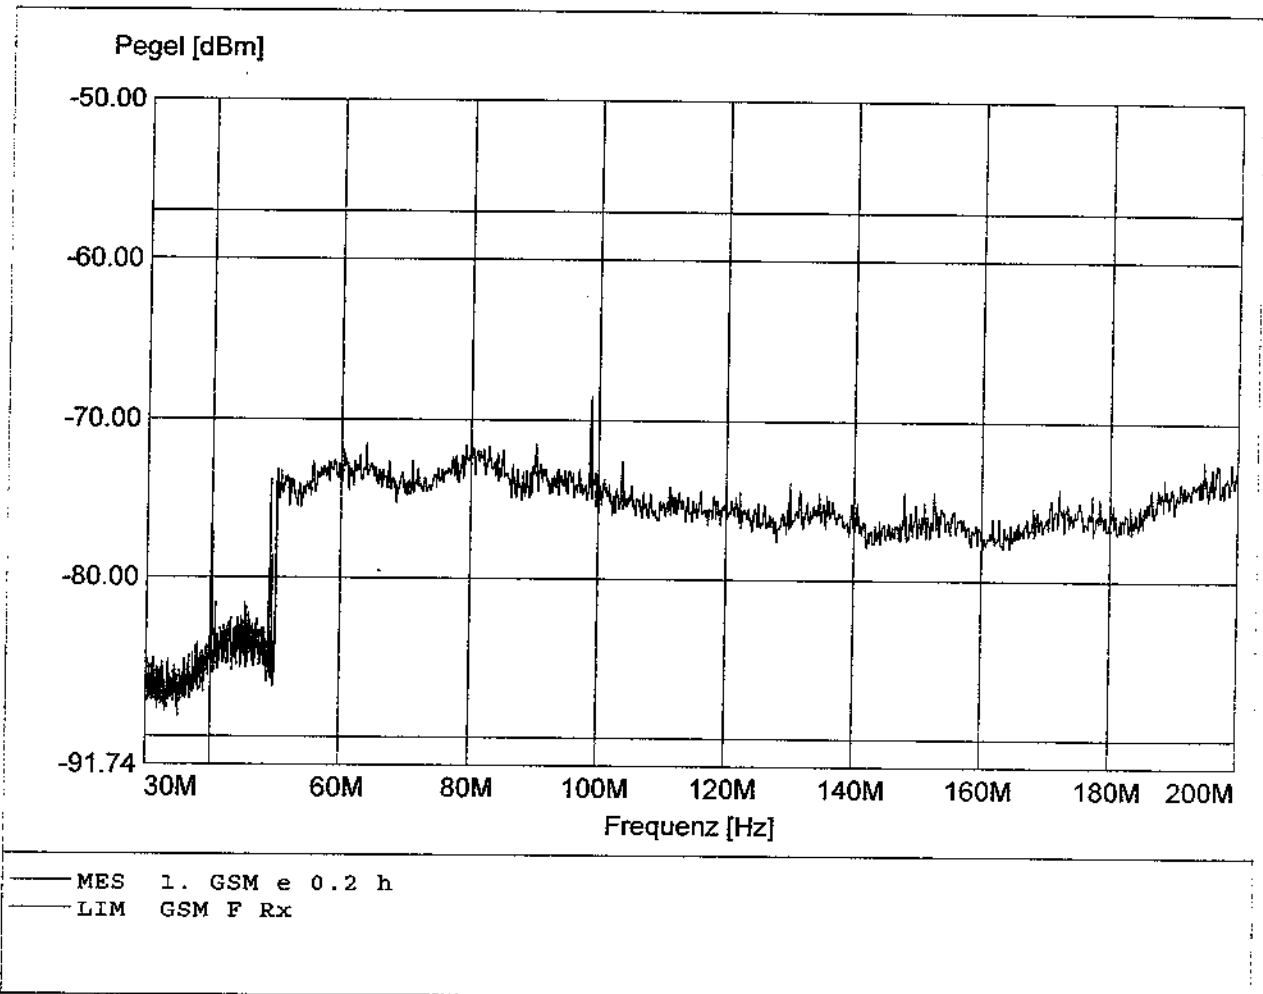

**Radiated spurious emissions-MS in idle mode
PCN 1800 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.2
Comment 1: Dist.: 3m, Ant.: H1 223, Ampl.: 0.2-1GHz
Comment 2: Freq:835.556MHz Pmax:-65.43 RBW:100KHz

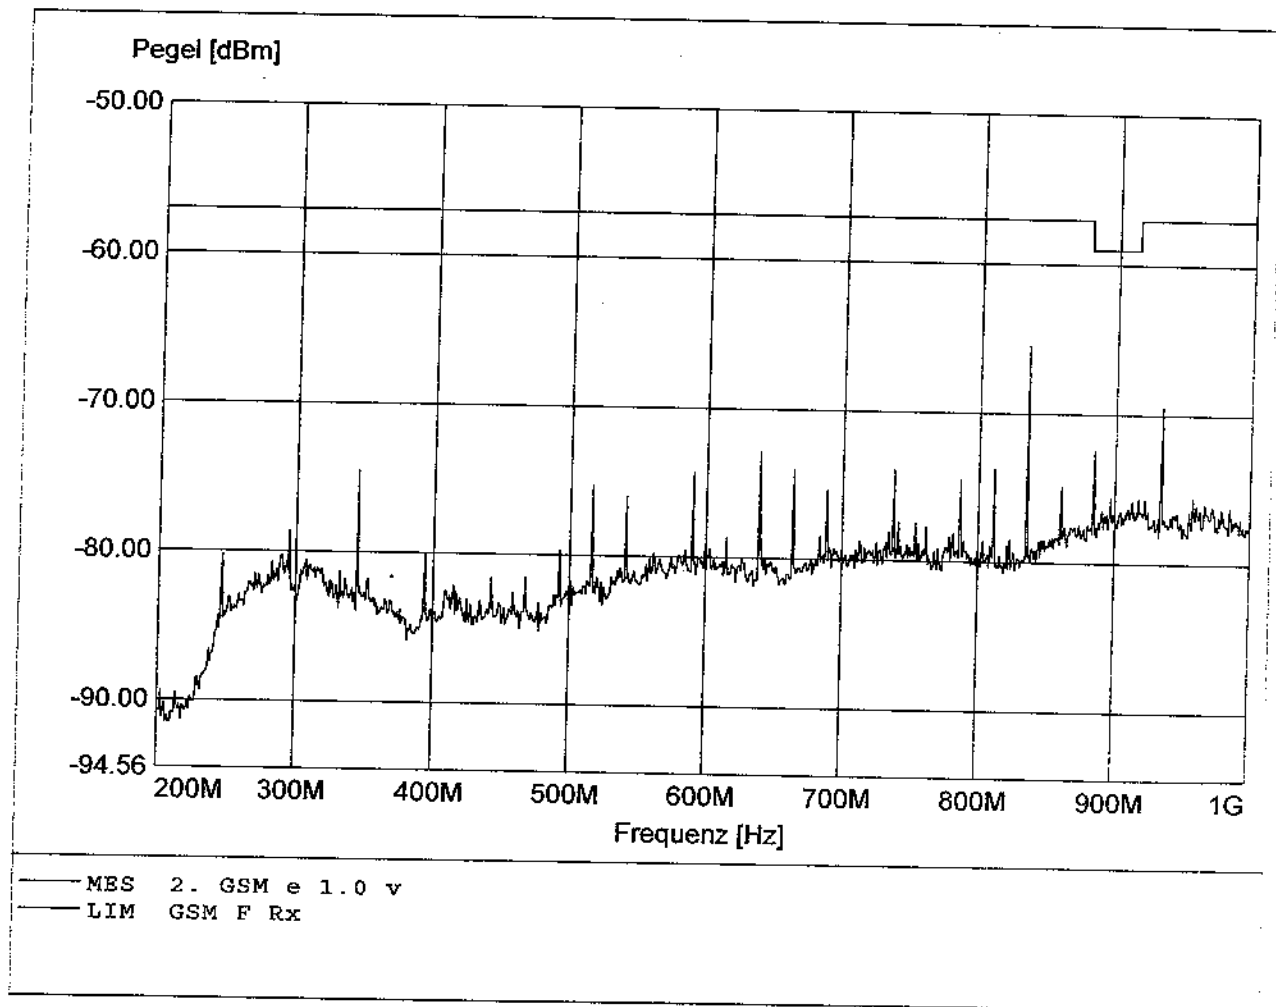

**Radiated spurious emissions-MS in idle mode
PCN 1800 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH


Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.2
Comment 1: Dist.: 3m, Ant.: H1 223, Ampl.: 0.2-1GHz
Comment 2: Freq:934.222MHz Pmax:-66.48 RBW:100KHz

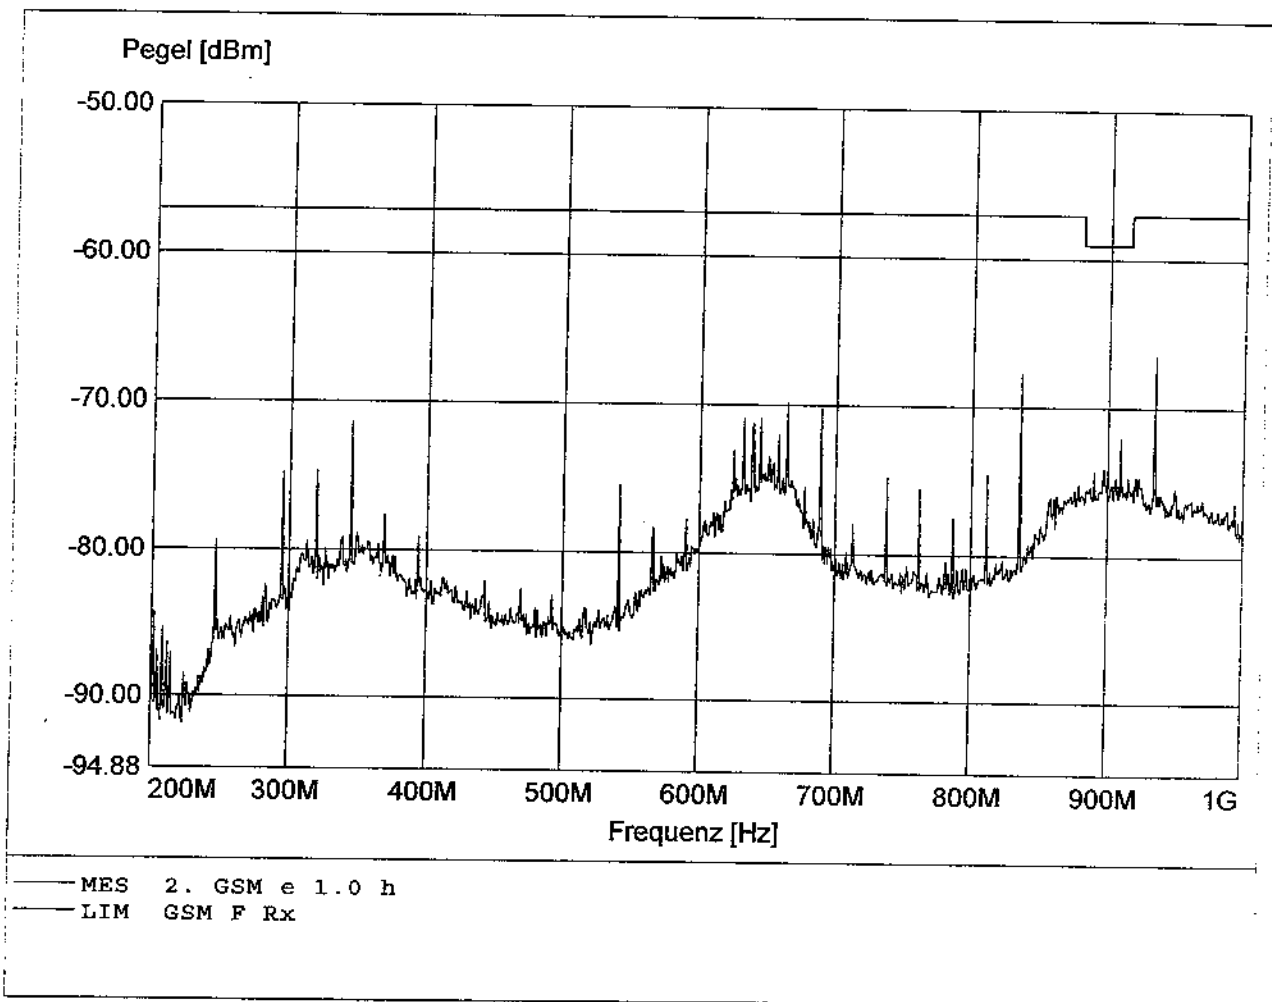

**Radiated spurious emissions-MS in idle mode
PCN 1800 (Fully anechoic chamber)**

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH

Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.2
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.: 1-4GHz
Comment 2: Freq:3.480GHz Pmax:-60.88 RBW:100KHz

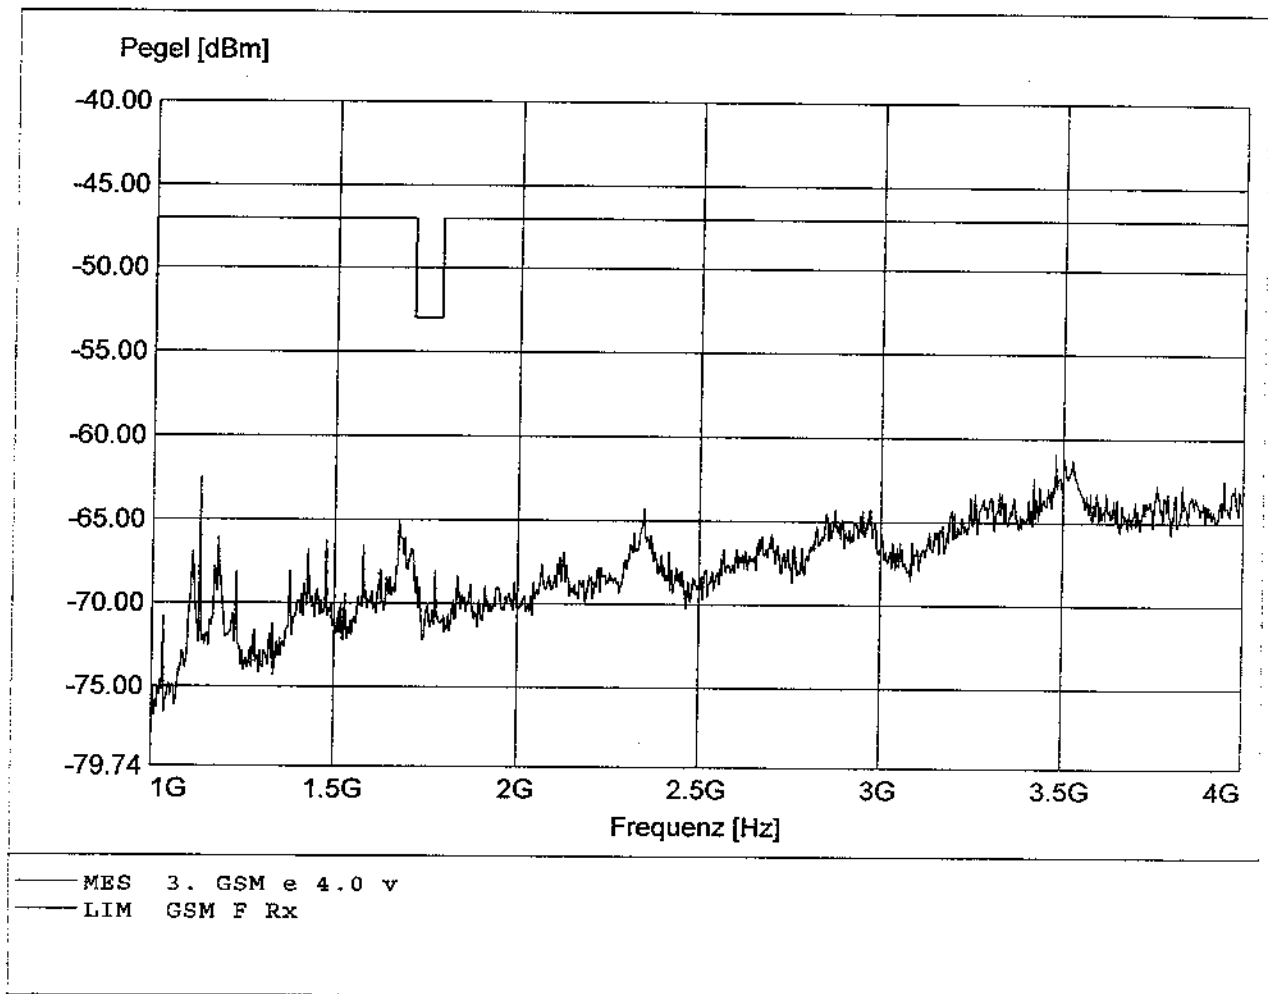

Radiated spurious emissions-MS in idle mode
PCN 1800 (Fully anechoic chamber)

EUT/Model : Modul / C2D-Si- 900/1800
Applicant: FALCOM GmbH

Temperature/ Voltage: Temp.: 23°C / Unom.: 5.0 VDC
Test Site / Operator: ETS / Mr. F.Schulz
Test Specification: GSM 11.10-1 testcase 12.2.2
Comment 1: Dist.: 3m, Ant.: HL 025, Ampl.: 1-4GHz
Comment 2: Freq:3.370GHz Pmax:-60.59 RBW:100KHz

